



# SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## NEC Corporation

SPECfp®2006 = **61.9**

Express5800/R120d-1E (Intel Xeon E5-2430L)

SPECfp\_base2006 = **59.5**

CPU2006 license: 9006


Test date: Jun-2012

Test sponsor: NEC Corporation

Hardware Availability: May-2012

Tested by: NEC Corporation

Software Availability: Dec-2011

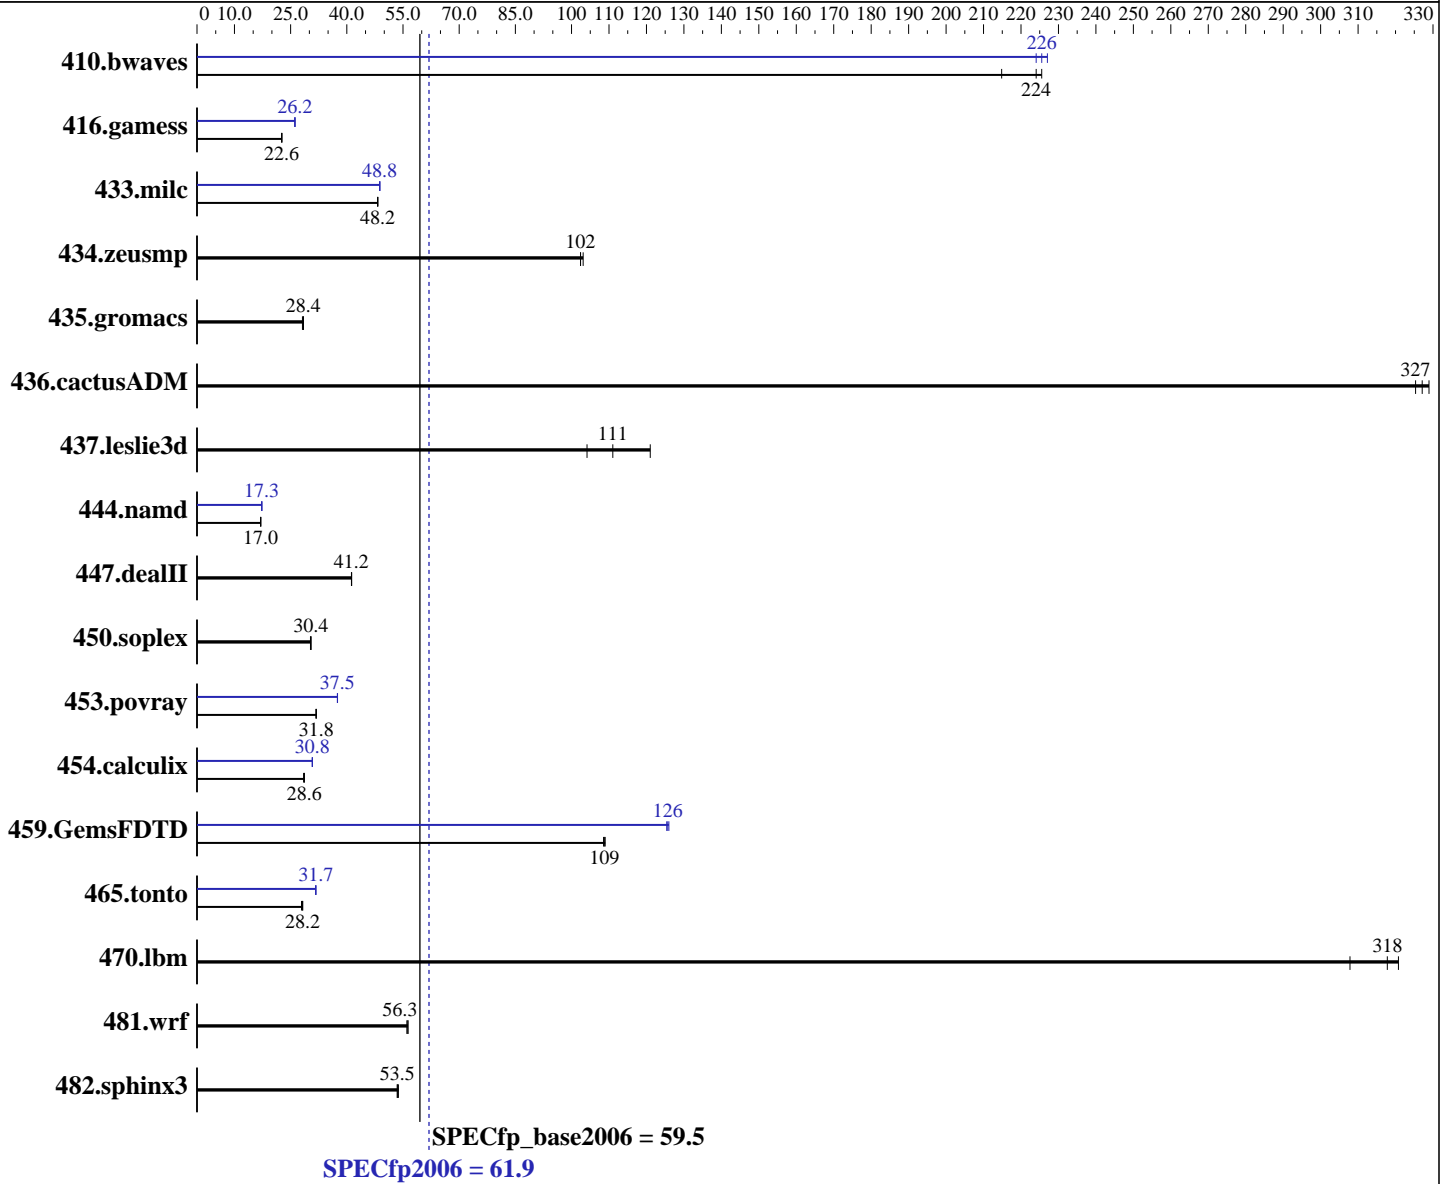

Hardware	
CPU Name:	Intel Xeon E5-2430L
CPU Characteristics:	Intel Turbo Boost Technology up to 2.50 GHz
CPU MHz:	2000
FPU:	Integrated
CPU(s) enabled:	12 cores, 2 chips, 6 cores/chip, 2 threads/core
CPU(s) orderable:	1,2 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core

Continued on next page

Software	
Operating System:	Red Hat Enterprise Linux Server release 6.2 (Santiago)
	Kernel 2.6.32-220.el6.x86_64
Compiler:	C/C++: Version 12.1.2.273 of Intel C++ Studio XE for Linux;
	Fortran: Version 12.1.2.273 of Intel Fortran Studio XE for Linux
Auto Parallel:	Yes
File System:	ext4

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## NEC Corporation

SPECfp2006 = **61.9**

Express5800/R120d-1E (Intel Xeon E5-2430L)

SPECfp\_base2006 = **59.5**

CPU2006 license: 9006

Test date: Jun-2012

Test sponsor: NEC Corporation

Hardware Availability: May-2012

Tested by: NEC Corporation

Software Availability: Dec-2011

L3 Cache: 15 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 96 GB (12 x 8 GB 2Rx4 PC3L-12800R-11, ECC, running at 1333 MHz and CL9)  
 Disk Subsystem: 1 x 250 GB SATA, 7200 RPM  
 Other Hardware: None

System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 32/64-bit  
 Other Software: None

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	63.3	215	<b>60.7</b>	<b>224</b>	60.3	226	60.7	224	59.9	227	<b>60.3</b>	<b>226</b>
416.gamess	866	22.6	863	22.7	<b>865</b>	<b>22.6</b>	748	26.2	<b>748</b>	<b>26.2</b>	751	26.1
433.milc	190	48.3	190	48.2	<b>190</b>	<b>48.2</b>	188	48.8	188	48.8	<b>188</b>	<b>48.8</b>
434.zeusmp	88.3	103	<b>88.9</b>	<b>102</b>	88.9	102	88.3	103	<b>88.9</b>	<b>102</b>	88.9	102
435.gromacs	254	28.2	<b>252</b>	<b>28.4</b>	251	28.4	254	28.2	<b>252</b>	<b>28.4</b>	251	28.4
436.cactusADM	36.7	325	36.3	329	<b>36.5</b>	<b>327</b>	36.7	325	36.3	329	<b>36.5</b>	<b>327</b>
437.leslie3d	77.7	121	90.3	104	<b>84.7</b>	<b>111</b>	77.7	121	90.3	104	<b>84.7</b>	<b>111</b>
444.namd	471	17.0	<b>471</b>	<b>17.0</b>	472	17.0	464	17.3	<b>464</b>	<b>17.3</b>	463	17.3
447.dealII	<b>277</b>	<b>41.2</b>	277	41.2	277	41.3	<b>277</b>	<b>41.2</b>	277	41.2	277	41.3
450.soplex	<b>274</b>	<b>30.4</b>	275	30.3	274	30.4	<b>274</b>	<b>30.4</b>	275	30.3	274	30.4
453.povray	167	31.8	<b>167</b>	<b>31.8</b>	167	31.9	<b>142</b>	<b>37.5</b>	142	37.5	142	37.5
454.calculix	<b>288</b>	<b>28.6</b>	288	28.7	290	28.5	<b>268</b>	<b>30.8</b>	268	30.8	268	30.8
459.GemsFDTD	97.4	109	97.7	109	<b>97.6</b>	<b>109</b>	84.2	126	<b>84.4</b>	<b>126</b>	84.6	125
465.tonto	349	28.2	<b>349</b>	<b>28.2</b>	353	27.9	311	31.7	<b>310</b>	<b>31.7</b>	310	31.7
470.lbm	42.8	321	44.6	308	<b>43.2</b>	<b>318</b>	42.8	321	44.6	308	<b>43.2</b>	<b>318</b>
481.wrf	198	56.3	199	56.0	<b>198</b>	<b>56.3</b>	198	56.3	199	56.0	<b>198</b>	<b>56.3</b>
482.sphinx3	362	53.8	<b>364</b>	<b>53.5</b>	364	53.5	362	53.8	<b>364</b>	<b>53.5</b>	364	53.5

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

BIOS Settings:  
Energy Performance: Performance

## General Notes

Environment variables set by runspec before the start of the run:  
 KMP\_AFFINITY = "granularity=fine,compact,1,0"  
 LD\_LIBRARY\_PATH = "/home/cpu2006/libs/32:/home/cpu2006/libs/64"

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

SPECfp2006 = 61.9

Express5800/R120d-1E (Intel Xeon E5-2430L)

SPECfp\_base2006 = 59.5

CPU2006 license: 9006

Test date: Jun-2012

Test sponsor: NEC Corporation

Hardware Availability: May-2012

Tested by: NEC Corporation

Software Availability: Dec-2011

## General Notes (Continued)

OMP\_NUM\_THREADS = "12"

The Express5800/R120d-1E and the Express5800/R120d-2E models are electronically equivalent. The results have been measured on the Express5800/R120d-1E model.

Added glibc-static-2.12-1.47.el6.x86\_64.rpm to enable static linking

Transparent Huge Pages enabled with:  
echo always > /sys/kernel/mm/redhat\_transparent\_hugepage/enabled

## Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.deallI: -DSPEC\_CPU\_LP64  
450.soplex: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
482.sphinx3: -DSPEC\_CPU\_LP64



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

SPECfp2006 = 61.9

Express5800/R120d-1E (Intel Xeon E5-2430L)

SPECfp\_base2006 = 59.5

CPU2006 license: 9006

Test date: Jun-2012

Test sponsor: NEC Corporation

Hardware Availability: May-2012

Tested by: NEC Corporation

Software Availability: Dec-2011

## Base Optimization Flags

C benchmarks:

```
-xAVX -ipo -O3 -no-prec-div -static -parallel -opt-prefetch  
-ansi-alias
```

C++ benchmarks:

```
-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -ansi-alias
```

Fortran benchmarks:

```
-xAVX -ipo -O3 -no-prec-div -static -parallel -opt-prefetch
```

Benchmarks using both Fortran and C:

```
-xAVX -ipo -O3 -no-prec-div -static -parallel -opt-prefetch  
-ansi-alias
```

## Peak Compiler Invocation

C benchmarks:

```
icc -m64
```

C++ benchmarks:

```
icpc -m64
```

Fortran benchmarks:

```
ifort -m64
```

Benchmarks using both Fortran and C:

```
icc -m64 ifort -m64
```

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

```
433.milc: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -static -auto-ilp32  
-ansi-alias
```

```
470.lbm: basepeak = yes
```

```
482.sphinx3: basepeak = yes
```

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

SPECfp2006 = 61.9

Express5800/R120d-1E (Intel Xeon E5-2430L)

SPECfp\_base2006 = 59.5

CPU2006 license: 9006

Test date: Jun-2012

Test sponsor: NEC Corporation

Hardware Availability: May-2012

Tested by: NEC Corporation

Software Availability: Dec-2011

## Peak Optimization Flags (Continued)

C++ benchmarks:

444.namd: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -fno-alias  
-auto-ilp32

447.dealII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: -xAVX -ipo -O3 -no-prec-div -opt-prefetch -parallel  
-static

416.gamess: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2  
-inline-level=0 -scalar-rep- -static

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2  
-inline-level=0 -opt-prefetch -parallel

465.tonto: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -inline-calloc  
-opt-malloc-options=3 -auto -unroll4

Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

454.calculix: -xAVX -ipo -O3 -no-prec-div -auto-ilp32 -ansi-alias

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.html>

<http://www.spec.org/cpu2006/flags/NEC-Platform-Settings-V1.2-R120d-RevA.html>



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

<b>NEC Corporation</b>	<b>SPECfp2006 =</b>	<b>61.9</b>
Express5800/R120d-1E (Intel Xeon E5-2430L)	<b>SPECfp_base2006 =</b>	<b>59.5</b>

<b>CPU2006 license:</b> 9006	<b>Test date:</b> Jun-2012
<b>Test sponsor:</b> NEC Corporation	<b>Hardware Availability:</b> May-2012
<b>Tested by:</b> NEC Corporation	<b>Software Availability:</b> Dec-2011

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.xml>  
<http://www.spec.org/cpu2006/flags/NEC-Platform-Settings-V1.2-R120d-RevA.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Thu Jul 24 08:27:51 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 19 June 2012.