



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

**SPECint®2006 = 39.3**

PRIMERGY BX920 S3, Intel Xeon E5-2430L, 2.0 GHz

**SPECint\_base2006 = 36.9**

CPU2006 license: 19


Test sponsor: Fujitsu

Tested by: Fujitsu

**Test date:** May-2012

**Hardware Availability:** May-2012

**Software Availability:** Feb-2012

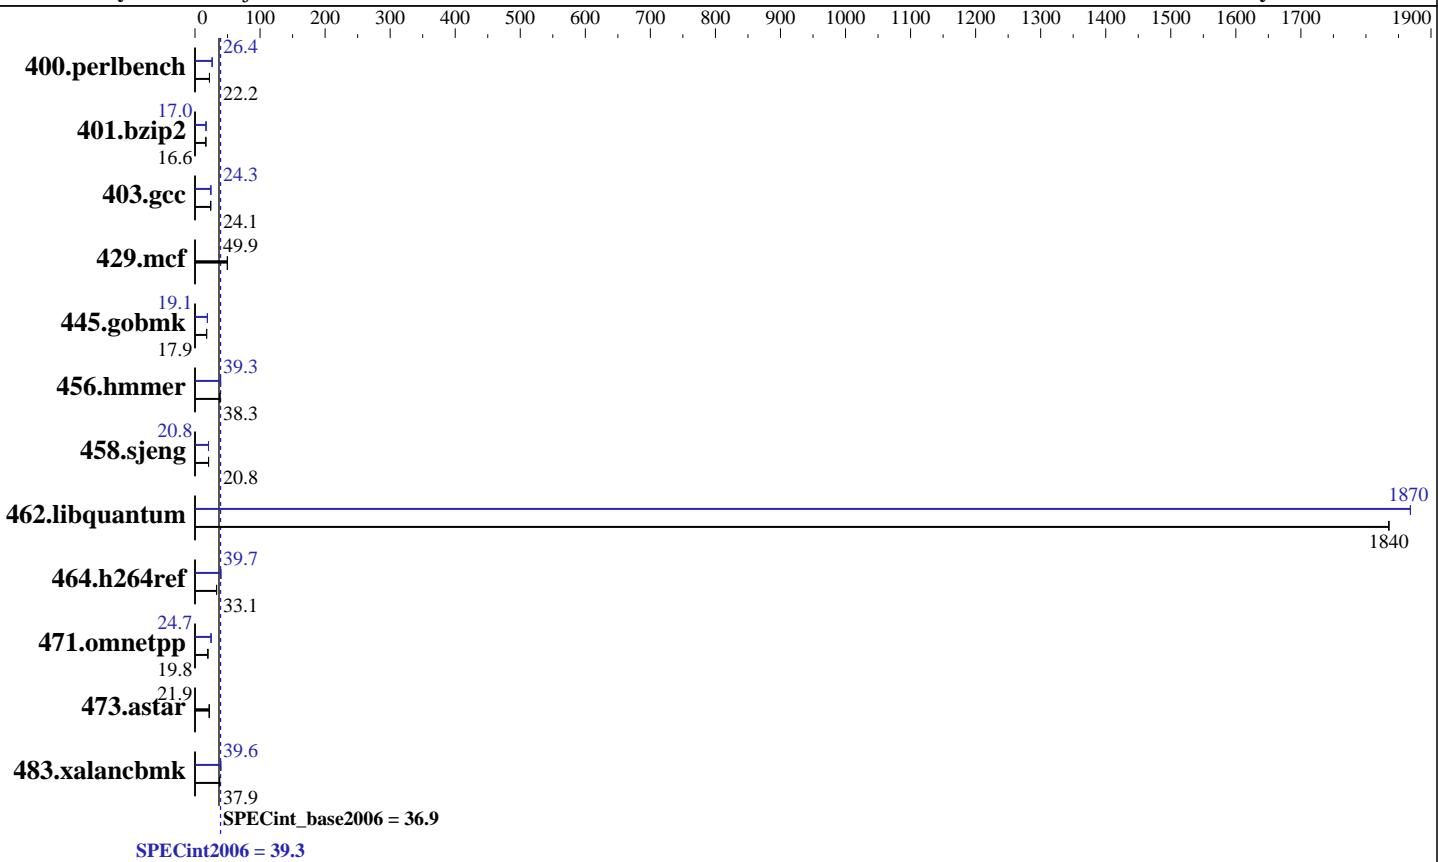

## Hardware

CPU Name:	Intel Xeon E5-2430L
CPU Characteristics:	Intel Turbo Boost Technology up to 2.50 GHz
CPU MHz:	2000
FPU:	Integrated
CPU(s) enabled:	12 cores, 2 chips, 6 cores/chip
CPU(s) orderable:	1,2 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core
L3 Cache:	15 MB I+D on chip per chip
Other Cache:	None
Memory:	96 GB (12 x 8 GB 2Rx4 PC3L-12800R-11, ECC, running at 1333 MHz and CL9)
Disk Subsystem:	1 x SATA, 500 GB, 7200 RPM
Other Hardware:	None

## Software

Operating System:	Red Hat Enterprise Linux Server release 6.2 (Santiago) 2.6.32-220.el6.x86_64
Compiler:	C/C++: Version 12.1.0.293 of Intel C++ Studio XE for Linux
Auto Parallel:	Yes
File System:	ext4
System State:	Run level 3 (multi-user)
Base Pointers:	32/64-bit
Peak Pointers:	32/64-bit
Other Software:	Microquill SmartHeap V10.0



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY BX920 S3, Intel Xeon E5-2430L, 2.0 GHz

**SPECint2006 = 39.3**

**SPECint\_base2006 = 36.9**

CPU2006 license: 19

Test date: May-2012

Test sponsor: Fujitsu

Hardware Availability: May-2012

Tested by: Fujitsu

Software Availability: Feb-2012

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	439	22.3	440	22.2	<b>439</b>	<b>22.2</b>	370	26.4	<b>370</b>	<b>26.4</b>	371	26.3
401.bzip2	<b>580</b>	<b>16.6</b>	583	16.6	580	16.6	<b>569</b>	17.0	<b>569</b>	17.0	<b>569</b>	<b>17.0</b>
403.gcc	334	24.1	<b>334</b>	<b>24.1</b>	335	24.1	331	24.3	<b>331</b>	<b>24.3</b>	331	24.3
429.mcf	183	50.0	<b>183</b>	<b>49.9</b>	184	49.5	<b>183</b>	50.0	<b>183</b>	<b>49.9</b>	184	49.5
445.gobmk	<b>588</b>	<b>17.9</b>	587	17.9	588	17.9	550	19.1	<b>550</b>	<b>19.1</b>	550	19.1
456.hmmer	<b>244</b>	<b>38.3</b>	244	38.2	244	38.3	<b>237</b>	<b>39.3</b>	238	39.3	237	39.3
458.sjeng	581	20.8	581	20.8	<b>581</b>	<b>20.8</b>	583	20.8	<b>583</b>	<b>20.8</b>	584	20.7
462.libquantum	<b>11.3</b>	<b>1840</b>	11.3	1840	11.3	1840	<b>11.1</b>	<b>1870</b>	11.1	1870	11.1	1870
464.h264ref	670	33.0	<b>668</b>	<b>33.1</b>	664	33.3	<b>557</b>	<b>39.7</b>	562	39.4	<b>557</b>	39.8
471.omnetpp	<b>316</b>	<b>19.8</b>	316	19.8	317	19.7	<b>253</b>	<b>24.7</b>	253	24.7	253	24.7
473.astar	320	22.0	320	21.9	<b>320</b>	<b>21.9</b>	320	22.0	320	21.9	<b>320</b>	<b>21.9</b>
483.xalancbmk	183	37.7	182	37.9	<b>182</b>	<b>37.9</b>	175	39.5	174	39.6	<b>174</b>	<b>39.6</b>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

BIOS configuration:

Intel HT Technology = Disable

Frequency Floor Override = Enable

## General Notes

Environment variables set by runspec before the start of the run:

KMP\_AFFINITY = "granularity=fine,scatter"

LD\_LIBRARY\_PATH = "/SPECcpu2006/libs/32:/SPECcpu2006/libs/64"

OMP\_NUM\_THREADS = "12"

Binaries compiled on a system with 1x E3-1270v2 CPU + 32 GB memory using RHEL6.2

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/redhat\_transparent\_hugepage/enabled

For information about Fujitsu please visit: <http://www.fujitsu.com>

## Base Compiler Invocation

C benchmarks:

icc -m64

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY BX920 S3, Intel Xeon E5-2430L, 2.0 GHz

**SPECint2006 = 39.3**

**SPECint\_base2006 = 36.9**

CPU2006 license: 19

Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: May-2012

Hardware Availability: May-2012

Software Availability: Feb-2012

## Base Compiler Invocation (Continued)

C++ benchmarks:

`icpc -m64`

## Base Portability Flags

```
400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
403.gcc: -DSPEC_CPU_LP64
429.mcf: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hammer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
471.omnetpp: -DSPEC_CPU_LP64
473.astar: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
```

## Base Optimization Flags

C benchmarks:

`-xSSE4.2 -ipo -O3 -no-prec-div -parallel -opt-prefetch -auto-p32`

C++ benchmarks:

`-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-Wl,-z,muldefs -L/opt/SmartHeap/lib64 -lsmartheap64`

## Base Other Flags

C benchmarks:

`403.gcc: -Dalloca=_alloca`

## Peak Compiler Invocation

C benchmarks (except as noted below):

`icc -m64`

400.perlbench: `icc -m32`

445.gobmk: `icc -m32`

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY BX920 S3, Intel Xeon E5-2430L, 2.0 GHz

**SPECint2006 = 39.3**

**SPECint\_base2006 = 36.9**

**CPU2006 license:** 19

**Test sponsor:** Fujitsu

**Tested by:** Fujitsu

**Test date:** May-2012

**Hardware Availability:** May-2012

**Software Availability:** Feb-2012

## Peak Compiler Invocation (Continued)

464.h264ref: `icc -m32`

C++ benchmarks (except as noted below):

`icpc -m32`

473.astar: `icpc -m64`

## Peak Portability Flags

400.perlbench: `-DSPEC_CPU_LINUX_IA32`  
401.bzip2: `-DSPEC_CPU_LP64`  
403.gcc: `-DSPEC_CPU_LP64`  
429.mcf: `-DSPEC_CPU_LP64`  
456.hmmer: `-DSPEC_CPU_LP64`  
458.sjeng: `-DSPEC_CPU_LP64`  
462.libquantum: `-DSPEC_CPU_LP64 -DSPEC_CPU_LINUX`  
473.astar: `-DSPEC_CPU_LP64`  
483.xalancbmk: `-DSPEC_CPU_LINUX`

## Peak Optimization Flags

C benchmarks:

400.perlbench: `-xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)`  
`-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)`  
`-opt-prefetch -ansi-alias`  
  
401.bzip2: `-xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)`  
`-O3(pass 2) -no-prec-div -prof-use(pass 2) -auto-ilp32`  
`-opt-prefetch -ansi-alias`  
  
403.gcc: `-xAVX -ipo -O3 -no-prec-div -inline-calloc`  
`-opt-malloc-options=3 -auto-ilp32`  
  
429.mcf: `basepeak = yes`  
  
445.gobmk: `-xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)`  
`-ansi-alias`  
  
456.hmmer: `-xSSE4.2 -ipo -O3 -no-prec-div -unroll12 -auto-ilp32`  
`-ansi-alias`  
  
458.sjeng: `-xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)`  
`-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)`  
`-unroll14`

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY BX920 S3, Intel Xeon E5-2430L, 2.0 GHz

**SPECint2006 = 39.3**

CPU2006 license: 19

Test date: May-2012

Test sponsor: Fujitsu

Hardware Availability: May-2012

Tested by: Fujitsu

Software Availability: Feb-2012

## Peak Optimization Flags (Continued)

462.libquantum: -xAVX -ipo -O3 -no-prec-div -parallel -opt-prefetch  
-auto-p32

464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-unroll12 -ansi-alias

C++ benchmarks:

471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-opt-ra-region-strategy=block -ansi-alias  
-Wl,-z,muldefs -L/opt/SmartHeap/lib -lsmartheap

473.astar: basepeak = yes

483.xalancbmk: -xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -ansi-alias  
-Wl,-z,muldefs -L/opt/SmartHeap/lib -lsmartheap

## Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=\_\_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.html>  
<http://www.spec.org/cpu2006/flags/Fujitsu-Platform.20120320.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.xml>  
<http://www.spec.org/cpu2006/flags/Fujitsu-Platform.20120320.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.

Report generated on Thu Jul 24 08:41:35 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 19 June 2012.