



# SPEC<sup>®</sup> CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Intel Corporation

SPECfp<sup>®</sup>2006 = **66.1**

Intel DH77KC motherboard (Intel Core i7-3770)

SPECfp\_base2006 = **64.6**

CPU2006 license: 13


Test sponsor: Intel Corporation

Tested by: Intel Corporation

Test date: May-2012

Hardware Availability: Apr-2012

Software Availability: Apr-2011

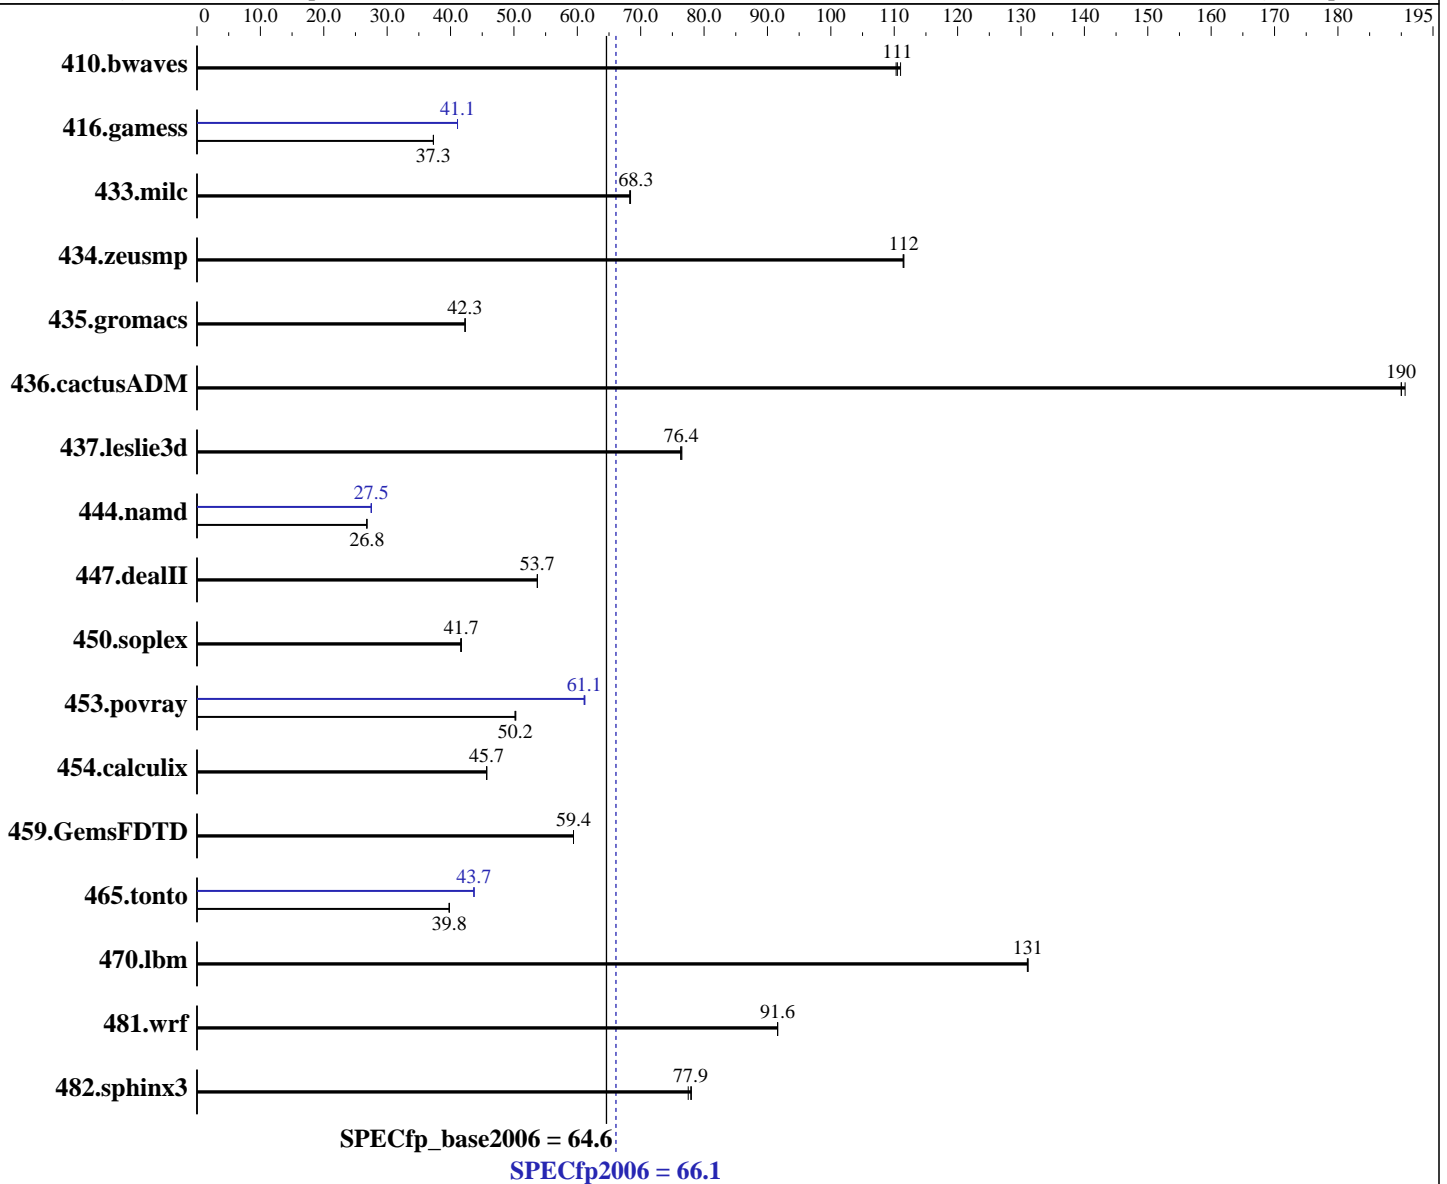

### Hardware

CPU Name: Intel Core i7-3770  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.90 GHz  
 CPU MHz: 3400  
 FPU: Integrated  
 CPU(s) enabled: 4 cores, 1 chip, 4 cores/chip, 2 threads/core  
 CPU(s) orderable: 1 chip  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

### Software

Operating System: Microsoft Windows 7 Ultimate (64-bit)  
 6.1.7601 Service Pack 1 Build 7601  
 Compiler: C/C++: Version 12.1.0.229 of Intel C++ Studio XE for Windows;  
 Fortran: Version 12.1.0.229 of Intel Fortran Studio XE for Windows;  
 Libraries: Version 15.00.30729.01 of Microsoft Visual Studio 2008 Professional SP1  
 Auto Parallel: Yes  
 File System: NTFS

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

SPECfp2006 = 66.1

Intel DH77KC motherboard (Intel Core i7-3770)

SPECfp\_base2006 = 64.6

CPU2006 license: 13

Test date: May-2012

Test sponsor: Intel Corporation

Hardware Availability: Apr-2012

Tested by: Intel Corporation

Software Availability: Apr-2011

L3 Cache: 8 MB I+D on chip per chip  
Other Cache: None  
Memory: 8 GB (2 x 4 GB 2Rx4 PC3-12800U-11)  
Disk Subsystem: 1 TB Seagate SATA, 7200 RPM  
Other Hardware: None

System State: Default  
Base Pointers: 32/64-bit  
Peak Pointers: 32/64-bit  
Other Software: SmartHeap Library Version 9.01 from <http://www.microquill.com/>

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	123	110	<u>123</u>	<u>111</u>	122	111	123	110	<u>123</u>	<u>111</u>	122	111
416.gamess	524	37.3	<u>525</u>	<u>37.3</u>	525	37.3	477	41.1	<u>477</u>	<u>41.1</u>	477	41.1
433.milc	134	68.4	<u>134</u>	<u>68.3</u>	134	68.3	134	68.4	<u>134</u>	<u>68.3</u>	134	68.3
434.zeusmp	81.6	112	81.7	111	<u>81.6</u>	<u>112</u>	81.6	112	81.7	111	<u>81.6</u>	<u>112</u>
435.gromacs	<u>169</u>	<u>42.3</u>	169	42.3	169	42.3	<u>169</u>	<u>42.3</u>	169	42.3	169	42.3
436.cactusADM	62.7	191	<u>62.9</u>	<u>190</u>	62.9	190	62.7	191	<u>62.9</u>	<u>190</u>	62.9	190
437.leslie3d	123	76.5	<u>123</u>	<u>76.4</u>	123	76.3	123	76.5	<u>123</u>	<u>76.4</u>	123	76.3
444.namd	299	26.8	299	26.8	<u>299</u>	<u>26.8</u>	<u>292</u>	<u>27.5</u>	291	27.5	292	27.5
447.dealII	213	53.7	<u>213</u>	<u>53.7</u>	213	53.7	213	53.7	<u>213</u>	<u>53.7</u>	213	53.7
450.soplex	<u>200</u>	<u>41.7</u>	200	41.7	200	41.6	<u>200</u>	<u>41.7</u>	200	41.7	200	41.6
453.povray	106	50.3	<u>106</u>	<u>50.2</u>	106	50.2	<u>87.0</u>	<u>61.1</u>	87.0	61.1	86.9	61.2
454.calculix	<u>181</u>	<u>45.7</u>	181	45.7	181	45.7	<u>181</u>	<u>45.7</u>	181	45.7	181	45.7
459.GemsFDTD	179	59.4	179	59.4	<u>179</u>	<u>59.4</u>	179	59.4	179	59.4	<u>179</u>	<u>59.4</u>
465.tonto	<u>248</u>	<u>39.8</u>	247	39.8	248	39.8	225	43.7	<u>225</u>	<u>43.7</u>	225	43.7
470.lbm	105	131	105	131	<u>105</u>	<u>131</u>	105	131	105	131	<u>105</u>	<u>131</u>
481.wrf	122	91.6	<u>122</u>	<u>91.6</u>	122	91.6	122	91.6	<u>122</u>	<u>91.6</u>	122	91.6
482.sphinx3	252	77.5	<u>250</u>	<u>77.9</u>	250	78.0	252	77.5	<u>250</u>	<u>77.9</u>	250	78.0

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Compiler Invocation Notes

To compile these binaries, the Intel Compiler was set up to generate 64-bit binaries with the command: "ipsxe-comp-vars.bat intel64 vs2008" (shortcut provided in the Intel(r) Parallel Studio XE 2011 program folder)

## Platform Notes

Sysinfo program C:\CPU200~1.17A/Docs/sysinfo  
\$Rev: 6775 \$ \$Date:: 2011-08-16 #\$ \8787f7622badcf24e01c368b1db4377c  
running on CltE840F20AA171 Tue May 15 20:59:14 2012

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see: <http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

Trying 'systeminfo'

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

SPECfp2006 = 66.1

Intel DH77KC motherboard (Intel Core i7-3770)

SPECfp\_base2006 = 64.6

CPU2006 license: 13

Test date: May-2012

Test sponsor: Intel Corporation

Hardware Availability: Apr-2012

Tested by: Intel Corporation

Software Availability: Apr-2011

## Platform Notes (Continued)

OS Name : Microsoft Windows 7 Ultimate  
 OS Version : 6.1.7601 Service Pack 1 Build 7601  
 System Manufacturer: INTEL\_  
 System Model : DH77KC\_\_  
 Processor(s) : 1 Processor(s) Installed.  
     [01]: Intel64 Family 6 Model 58 Stepping 9 GenuineIntel ~3401 Mhz  
 BIOS Version : Intel Corp. KCH7710H.86A.0069.2012.0224.1825, 2/24/2012  
 Total Physical Memory: 8,090 MB

```
Trying 'wmic cpu get /value'
DeviceID : CPU0
L2CacheSize : 1024
L3CacheSize : 8192
MaxClockSpeed : 3401
Name : Intel(R) Core(TM) i7-3770 CPU @ 3.40GHz
NumberOfCores : 4
NumberOfLogicalProcessors: 8
```

(End of data from sysinfo program)

## Component Notes

Tested systems can be used with Shin-G ATX case, PC Power and Cooling 1200W power supply

## General Notes

OMP\_NUM\_THREADS set to number of processors cores  
 KMP\_AFFINITY set to granularity=fine,scatter  
 Binaries compiled on a system with 1x Intel Core i7-860 CPU  
 + 8GB memory using Windows 7 Enterprise 64-bit

## Base Compiler Invocation

C benchmarks:  
 icl -Qvc9 -Qstd=c99

C++ benchmarks:  
 icl -Qvc9

Fortran benchmarks:  
 ifort

Benchmarks using both Fortran and C:  
 icl -Qvc9 -Qstd=c99 ifort



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

SPECfp2006 = 66.1

Intel DH77KC motherboard (Intel Core i7-3770)

SPECfp\_base2006 = 64.6

CPU2006 license: 13

Test date: May-2012

Test sponsor: Intel Corporation

Hardware Availability: Apr-2012

Tested by: Intel Corporation

Software Availability: Apr-2011

## Base Portability Flags

```

410.bwaves: -DSPEC_CPU_P64 -names:lowercase
416.gamess: -DSPEC_CPU_P64
433.milc: -DSPEC_CPU_P64
434.zeusmp: -DSPEC_CPU_P64
435.gromacs: -DSPEC_CPU_P64
436.cactusADM: -DSPEC_CPU_P64 -names:lowercase /assume:underscore
437.leslie3d: -DSPEC_CPU_P64
444.namd: -DSPEC_CPU_P64 /TP
447.dealII: -DSPEC_CPU_P64 -DDEAL_II_MEMBER_VAR_SPECIALIZATION_BUG
450.soplex: -DSPEC_CPU_P64
453.povray: -DSPEC_CPU_P64 -DSPEC_CPU_WINDOWS_ICL
454.calculix: -DSPEC_CPU_P64 -DSPEC_CPU_NOZMODIFIER -names:lowercase
459.GemsFDTD: -DSPEC_CPU_P64
465.tonto: -DSPEC_CPU_P64
470.lbm: -DSPEC_CPU_P64
481.wrf: -DSPEC_CPU_P64 -DSPEC_CPU_WINDOWS_ICL
482.sphinx3: -DSPEC_CPU_P64

```

## Base Optimization Flags

C benchmarks:

```

-QxAVX -Qipo -O3 -Qprec-div- -Qparallel -Qansi-alias -Qopt-prefetch
-Qauto-ilp32 /F1000000000

```

C++ benchmarks:

```

-QxAVX -Qipo -O3 -Qprec-div- -Qparallel -Qansi-alias -Qopt-prefetch
-Qcxx-features -Qauto-ilp32 /F1000000000 shlw64M.lib
-link /FORCE:MULTIPLE

```

Fortran benchmarks:

```

-QxAVX -Qipo -O3 -Qprec-div- -Qparallel -Qansi-alias -Qopt-prefetch
/F1000000000

```

Benchmarks using both Fortran and C:

```

-QxAVX -Qipo -O3 -Qprec-div- -Qparallel -Qansi-alias -Qopt-prefetch
-Qauto-ilp32 /F1000000000

```

## Peak Compiler Invocation

C benchmarks:

```

icl -Qvc9 -Qstd=c99

```

C++ benchmarks:

```

icl -Qvc9

```

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

SPECfp2006 = 66.1

Intel DH77KC motherboard (Intel Core i7-3770)

SPECfp\_base2006 = 64.6

CPU2006 license: 13

Test date: May-2012

Test sponsor: Intel Corporation

Hardware Availability: Apr-2012

Tested by: Intel Corporation

Software Availability: Apr-2011

## Peak Compiler Invocation (Continued)

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

icl -Qvc9 -Qstd=c99 ifort

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

444.namd: -QxAVX(pass 2) -Qprof\_gen(pass 1) -Qprof\_use(pass 2) -Qipo  
-O3 -Qprec-div- -Oa -Qauto-ilp32 /F1000000000 sh1W64M.lib  
-link /FORCE:MULTIPLE

447.dealIII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -QxAVX(pass 2) -Qprof\_gen(pass 1) -Qprof\_use(pass 2) -Qipo  
-O3 -Qprec-div- -Qunroll4 -Qansi-alias -Qauto-ilp32  
/F1000000000 sh1W64M.lib -link /FORCE:MULTIPLE

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -QxAVX(pass 2) -Qprof\_gen(pass 1) -Qprof\_use(pass 2) -Qipo  
-O3 -Qprec-div- -Qunroll2 -Ob0 -Qansi-alias -Qscalar-rep-  
/F1000000000

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

SPECfp2006 = 66.1

Intel DH77KC motherboard (Intel Core i7-3770)

SPECfp\_base2006 = 64.6

CPU2006 license: 13

Test date: May-2012

Test sponsor: Intel Corporation

Hardware Availability: Apr-2012

Tested by: Intel Corporation

Software Availability: Apr-2011

## Peak Optimization Flags (Continued)

459.GemsFDTD: basepeak = yes

465.tonto: -QxAVX(pass 2) -Qprof\_gen(pass 1) -Qprof\_use(pass 2) -Qipo  
-O3 -Qprec-div- -Qunroll4 -Qauto -Qinline-calloc  
/F1000000000

Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: basepeak = yes

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-windows.20120117.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-windows.20120117.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Thu Jul 24 09:23:07 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 18 July 2012.