



SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

SPECfp®2006 = **64.5**

Intel DH77KC motherboard (Intel Core i5-3570)

SPECfp_base2006 = **62.9**

CPU2006 license: 13


Test sponsor: Intel Corporation

Tested by: Intel Corporation

Test date: May-2012

Hardware Availability: Apr-2012

Software Availability: Apr-2011

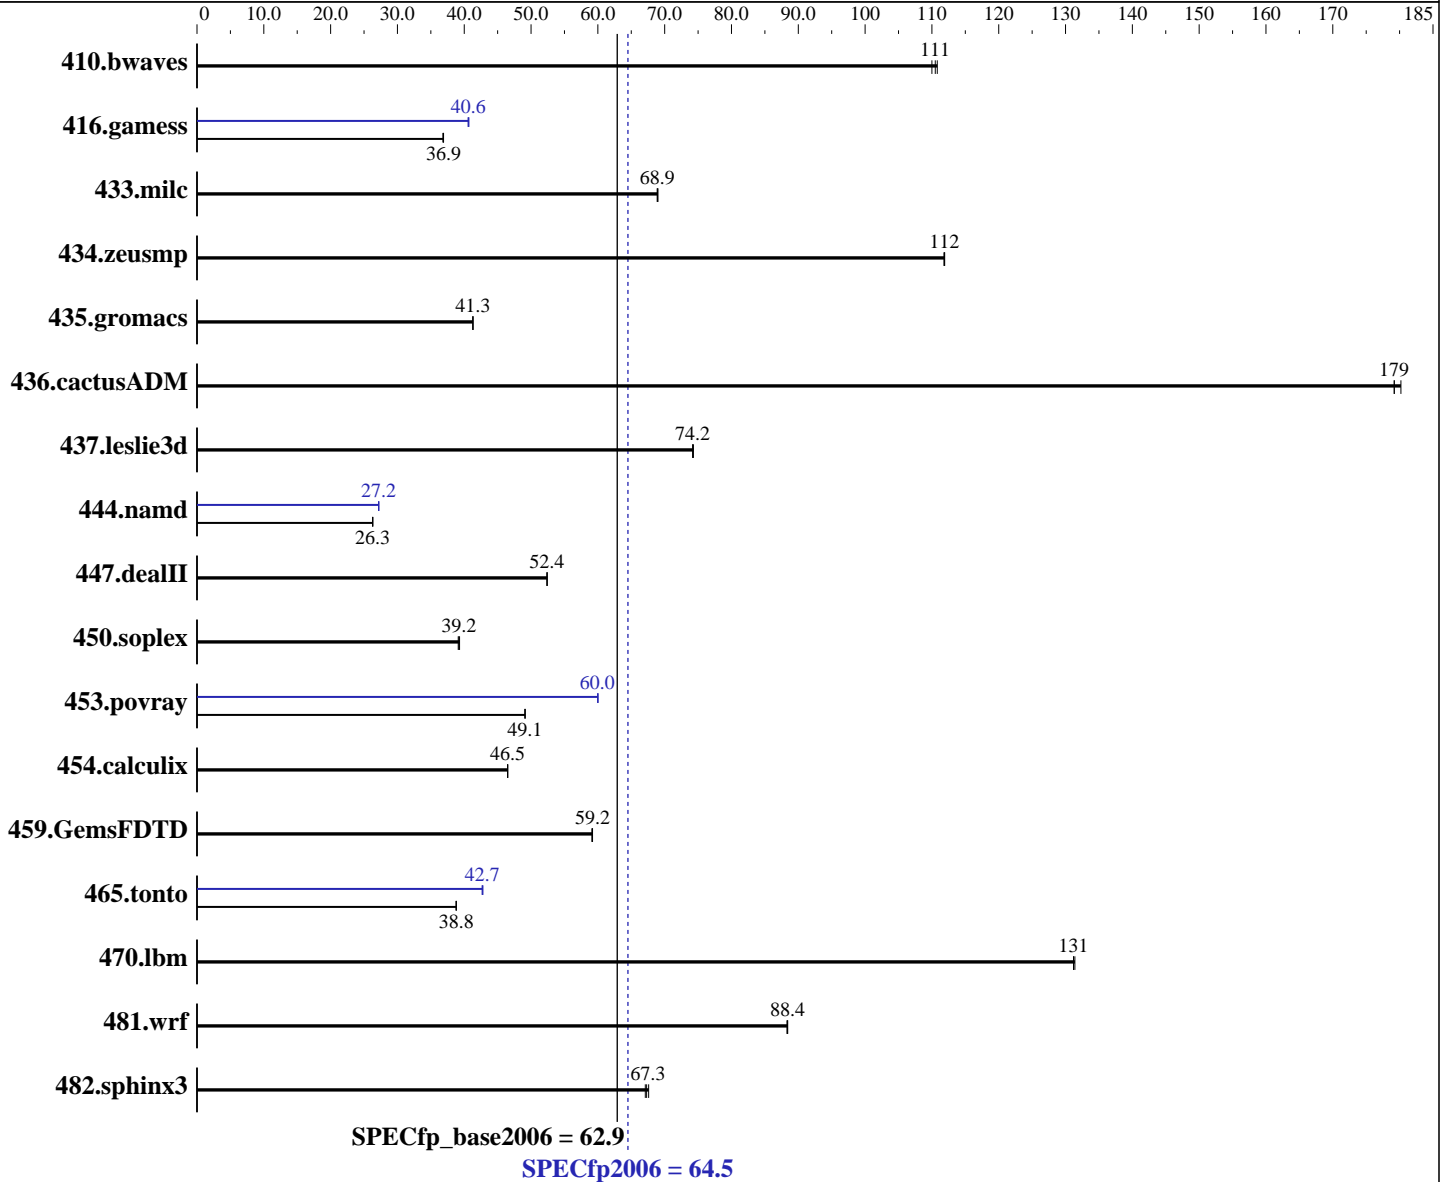

Hardware

CPU Name: Intel Core i5-3570
 CPU Characteristics: Intel Turbo Boost Technology up to 3.80 GHz
 CPU MHz: 3400
 FPU: Integrated
 CPU(s) enabled: 4 cores, 1 chip, 4 cores/chip
 CPU(s) orderable: 1 chip
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

Software

Operating System: Microsoft Windows 7 Ultimate (64-bit) 6.1.7601 Service Pack 1 Build 7601
 Compiler: C/C++: Version 12.1.0.229 of Intel C++ Studio XE for Windows;
 Fortran: Version 12.1.0.229 of Intel Fortran Studio XE for Windows;
 Libraries: Version 15.00.30729.01 of Microsoft Visual Studio 2008 Professional SP1
 Auto Parallel: Yes
 File System: NTFS

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

SPECfp2006 = **64.5**

Intel DH77KC motherboard (Intel Core i5-3570)

SPECfp_base2006 = **62.9**

CPU2006 license: 13

Test date: May-2012

Test sponsor: Intel Corporation

Hardware Availability: Apr-2012

Tested by: Intel Corporation

Software Availability: Apr-2011

L3 Cache: 6 MB I+D on chip per chip
Other Cache: None
Memory: 8 GB (2 x 4 GB 2Rx4 PC3-12800U-11)
Disk Subsystem: 1 TB Seagate SATA, 7200 RPM
Other Hardware: None

System State: Default
Base Pointers: 32/64-bit
Peak Pointers: 32/64-bit
Other Software: SmartHeap Library Version 9.01 from <http://www.microquill.com/>

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	124	110	123	111	<u>123</u>	<u>111</u>	124	110	123	111	<u>123</u>	<u>111</u>
416.gamess	532	36.8	<u>531</u>	<u>36.9</u>	531	36.9	<u>482</u>	<u>40.6</u>	482	40.6	482	40.7
433.milc	133	69.0	<u>133</u>	<u>68.9</u>	133	68.9	133	69.0	<u>133</u>	<u>68.9</u>	133	68.9
434.zeusmp	81.3	112	<u>81.3</u>	<u>112</u>	81.4	112	81.3	112	<u>81.3</u>	<u>112</u>	81.4	112
435.gromacs	173	41.3	173	41.3	<u>173</u>	<u>41.3</u>	173	41.3	173	41.3	<u>173</u>	<u>41.3</u>
436.cactusADM	66.3	180	<u>66.7</u>	<u>179</u>	66.7	179	66.3	180	<u>66.7</u>	<u>179</u>	66.7	179
437.leslie3d	127	74.2	127	74.3	<u>127</u>	<u>74.2</u>	127	74.2	127	74.3	<u>127</u>	<u>74.2</u>
444.namd	304	26.3	<u>304</u>	<u>26.3</u>	304	26.3	295	27.2	<u>295</u>	<u>27.2</u>	295	27.2
447.dealII	218	52.4	219	52.4	<u>218</u>	<u>52.4</u>	218	52.4	219	52.4	<u>218</u>	<u>52.4</u>
450.soplex	213	39.1	<u>213</u>	<u>39.2</u>	212	39.3	213	39.1	<u>213</u>	<u>39.2</u>	212	39.3
453.povray	108	49.1	<u>108</u>	<u>49.1</u>	108	49.1	88.7	60.0	<u>88.7</u>	<u>60.0</u>	88.7	60.0
454.calculix	178	46.5	<u>178</u>	<u>46.5</u>	178	46.5	178	46.5	<u>178</u>	<u>46.5</u>	178	46.5
459.GemsFDTD	179	59.1	179	59.2	<u>179</u>	<u>59.2</u>	179	59.1	179	59.2	<u>179</u>	<u>59.2</u>
465.tonto	254	38.8	<u>254</u>	<u>38.8</u>	254	38.8	230	42.8	<u>230</u>	<u>42.7</u>	230	42.7
470.lbm	<u>105</u>	<u>131</u>	105	131	105	131	<u>105</u>	<u>131</u>	105	131	105	131
481.wrf	126	88.4	127	88.3	<u>126</u>	<u>88.4</u>	126	88.4	127	88.3	<u>126</u>	<u>88.4</u>
482.sphinx3	<u>289</u>	<u>67.3</u>	289	67.6	290	67.1	<u>289</u>	<u>67.3</u>	289	67.6	290	67.1

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Invocation Notes

To compile these binaries, the Intel Compiler was set up to generate 64-bit binaries with the command: "ipsxe-comp-vars.bat intel64 vs2008" (shortcut provided in the Intel(r) Parallel Studio XE 2011 program folder)

Platform Notes

Sysinfo program C:\CPU200~1.17A\Docs\sysinfo
\$Rev: 6775 \$ \$Date: 2011-08-16 # \$ \8787f7622badcf24e01c368b1db4377c
running on CltE840F20AA52E Fri May 18 22:55:44 2012

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see: <http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

Trying 'systeminfo'

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

SPECfp2006 = 64.5

Intel DH77KC motherboard (Intel Core i5-3570)

SPECfp_base2006 = 62.9

CPU2006 license: 13

Test date: May-2012

Test sponsor: Intel Corporation

Hardware Availability: Apr-2012

Tested by: Intel Corporation

Software Availability: Apr-2011

Platform Notes (Continued)

OS Name : Microsoft Windows 7 Ultimate
 OS Version : 6.1.7601 Service Pack 1 Build 7601
 System Manufacturer: INTEL_
 System Model : DH77KC__
 Processor(s) : 1 Processor(s) Installed.
 [01]: Intel64 Family 6 Model 58 Stepping 9 GenuineIntel ~3401 Mhz
 BIOS Version : Intel Corp. KCH7710H.86A.0069.2012.0224.1825, 2/24/2012
 Total Physical Memory: 8,090 MB

```
Trying 'wmic cpu get /value'
DeviceID : CPU0
L2CacheSize : 1024
L3CacheSize : 6144
MaxClockSpeed : 3401
Name : Intel(R) Core(TM) i5-3570 CPU @ 3.40GHz
NumberOfCores : 4
NumberOfLogicalProcessors: 4
```

(End of data from sysinfo program)

Component Notes

Tested systems can be used with Shin-G ATX case, PC Power and Cooling 1200W power supply

General Notes

OMP_NUM_THREADS set to number of processors cores
 KMP_AFFINITY set to granularity=fine,scatter
 Binaries compiled on a system with 1x Intel Core i7-860 CPU
 + 8GB memory using Windows 7 Enterprise 64-bit

Base Compiler Invocation

C benchmarks:
 icl -Qvc9 -Qstd=c99

C++ benchmarks:
 icl -Qvc9

Fortran benchmarks:
 ifort

Benchmarks using both Fortran and C:
 icl -Qvc9 -Qstd=c99 ifort



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

SPECfp2006 = 64.5

Intel DH77KC motherboard (Intel Core i5-3570)

SPECfp_base2006 = 62.9

CPU2006 license: 13

Test date: May-2012

Test sponsor: Intel Corporation

Hardware Availability: Apr-2012

Tested by: Intel Corporation

Software Availability: Apr-2011

Base Portability Flags

```

410.bwaves: -DSPEC_CPU_P64 -names:lowercase
416.gamess: -DSPEC_CPU_P64
433.milc: -DSPEC_CPU_P64
434.zeusmp: -DSPEC_CPU_P64
435.gromacs: -DSPEC_CPU_P64
436.cactusADM: -DSPEC_CPU_P64 -names:lowercase /assume:underscore
437.leslie3d: -DSPEC_CPU_P64
444.namd: -DSPEC_CPU_P64 /TP
447.dealII: -DSPEC_CPU_P64 -DDEAL_II_MEMBER_VAR_SPECIALIZATION_BUG
450.soplex: -DSPEC_CPU_P64
453.povray: -DSPEC_CPU_P64 -DSPEC_CPU_WINDOWS_ICL
454.calculix: -DSPEC_CPU_P64 -DSPEC_CPU_NOZMODIFIER -names:lowercase
459.GemsFDTD: -DSPEC_CPU_P64
465.tonto: -DSPEC_CPU_P64
470.lbm: -DSPEC_CPU_P64
481.wrf: -DSPEC_CPU_P64 -DSPEC_CPU_WINDOWS_ICL
482.sphinx3: -DSPEC_CPU_P64

```

Base Optimization Flags

C benchmarks:

```

-QxAVX -Qipo -O3 -Qprec-div- -Qparallel -Qansi-alias -Qopt-prefetch
-Qauto-ilp32 /F1000000000

```

C++ benchmarks:

```

-QxAVX -Qipo -O3 -Qprec-div- -Qparallel -Qansi-alias -Qopt-prefetch
-Qcxx-features -Qauto-ilp32 /F1000000000 shlw64M.lib
-link /FORCE:MULTIPLE

```

Fortran benchmarks:

```

-QxAVX -Qipo -O3 -Qprec-div- -Qparallel -Qansi-alias -Qopt-prefetch
/F1000000000

```

Benchmarks using both Fortran and C:

```

-QxAVX -Qipo -O3 -Qprec-div- -Qparallel -Qansi-alias -Qopt-prefetch
-Qauto-ilp32 /F1000000000

```

Peak Compiler Invocation

C benchmarks:

```

icl -Qvc9 -Qstd=c99

```

C++ benchmarks:

```

icl -Qvc9

```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

SPECfp2006 = 64.5

Intel DH77KC motherboard (Intel Core i5-3570)

SPECfp_base2006 = 62.9

CPU2006 license: 13

Test date: May-2012

Test sponsor: Intel Corporation

Hardware Availability: Apr-2012

Tested by: Intel Corporation

Software Availability: Apr-2011

Peak Compiler Invocation (Continued)

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

icl -Qvc9 -Qstd=c99 ifort

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

444.namd: -QxAVX(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2) -Qipo
-O3 -Qprec-div- -Oa -Qauto-ilp32 /F1000000000 sh1W64M.lib
-link /FORCE:MULTIPLE

447.dealIII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -QxAVX(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2) -Qipo
-O3 -Qprec-div- -Qunroll4 -Qansi-alias -Qauto-ilp32
/F1000000000 sh1W64M.lib -link /FORCE:MULTIPLE

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -QxAVX(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2) -Qipo
-O3 -Qprec-div- -Qunroll2 -Ob0 -Qansi-alias -Qscalar-rep-
/F1000000000

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

SPECfp2006 = 64.5

Intel DH77KC motherboard (Intel Core i5-3570)

SPECfp_base2006 = 62.9

CPU2006 license: 13

Test date: May-2012

Test sponsor: Intel Corporation

Hardware Availability: Apr-2012

Tested by: Intel Corporation

Software Availability: Apr-2011

Peak Optimization Flags (Continued)

459.GemsFDTD: basepeak = yes

465.tonto: -QxAVX(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2) -Qipo
-O3 -Qprec-div- -Qunroll4 -Qauto -Qinline-calloc
/F1000000000

Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: basepeak = yes

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-windows.20120117.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-windows.20120117.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Thu Jul 24 09:29:27 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 18 July 2012.