



# SPEC<sup>®</sup> CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## NEC Corporation

SPECfp<sup>®</sup>2006 = 40.0

### Express5800/T110d (Intel Xeon E5-2403)

SPECfp\_base2006 = 39.1

CPU2006 license: 9006


Test date: Jul-2012

Test sponsor: NEC Corporation

Hardware Availability: May-2012

Tested by: NEC Corporation

Software Availability: Dec-2011

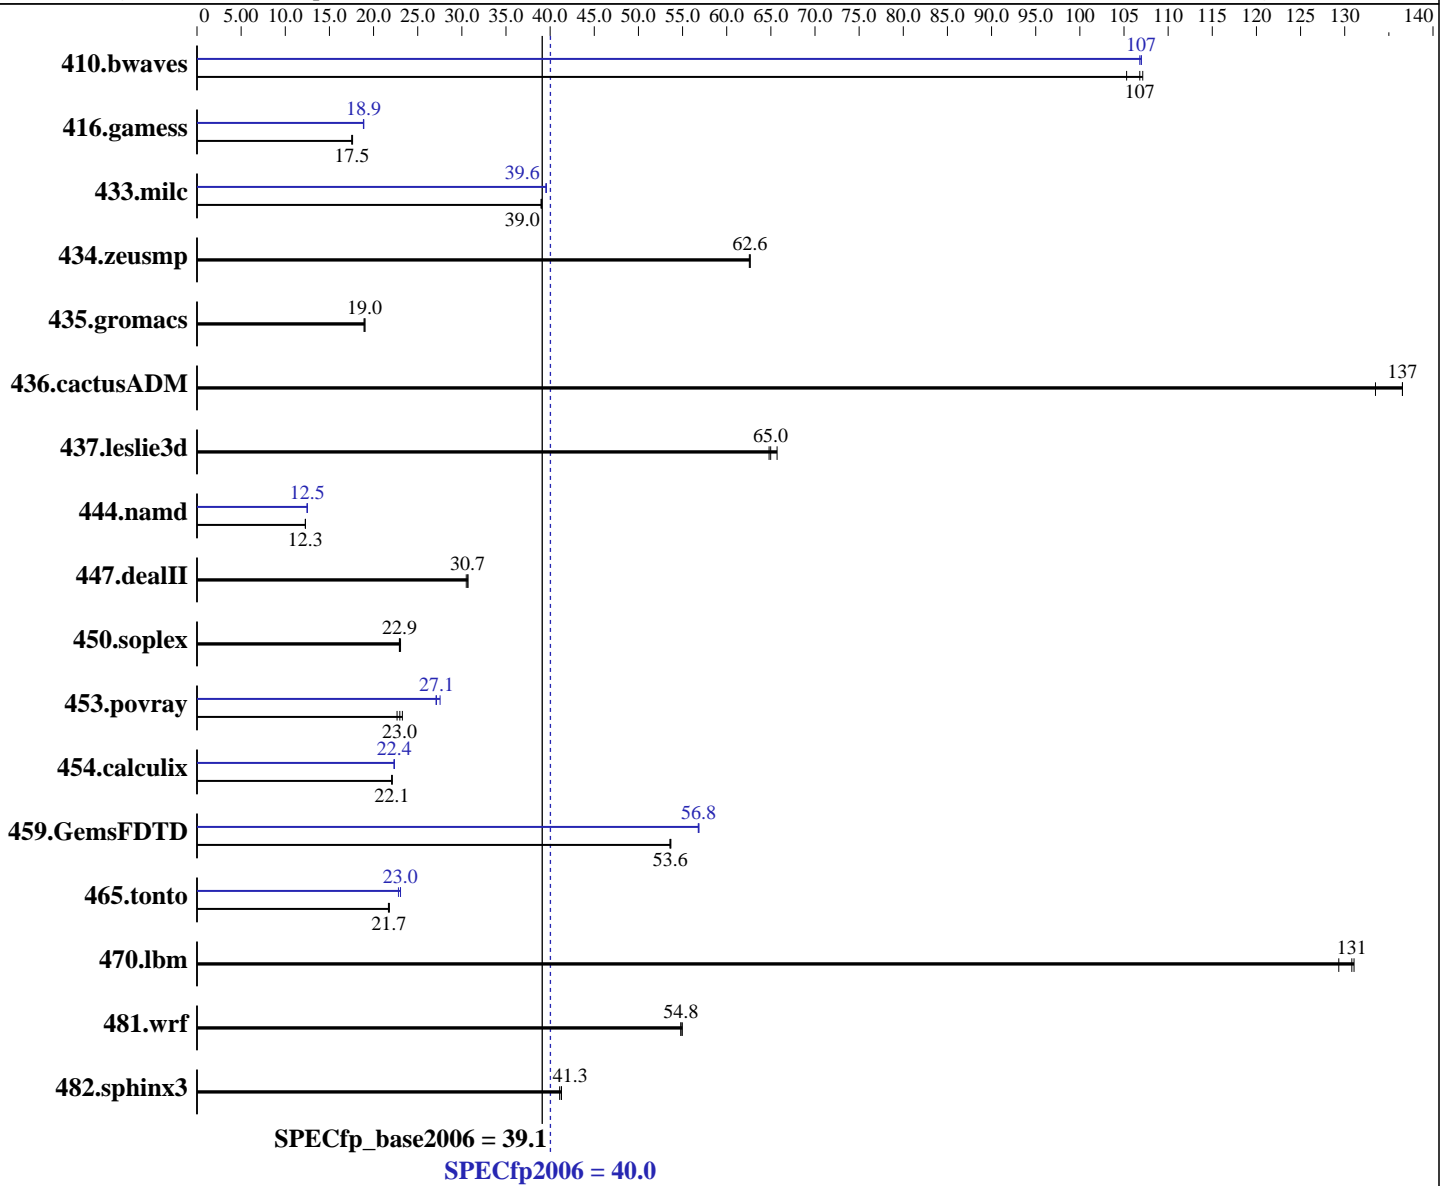

#### Hardware

CPU Name: Intel Xeon E5-2403  
 CPU Characteristics:  
 CPU MHz: 1800  
 FPU: Integrated  
 CPU(s) enabled: 4 cores, 1 chip, 4 cores/chip  
 CPU(s) orderable: 1 chip  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

#### Software

Operating System: Red Hat Enterprise Linux Server release 6.2 (Santiago)  
 Kernel 2.6.32-220.el6.x86\_64  
 Compiler: C/C++: Version 12.1.2.273 of Intel C++ Studio XE for Linux;  
 Fortran: Version 12.1.2.273 of Intel Fortran Studio XE for Linux  
 Auto Parallel: Yes  
 File System: ext4

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## NEC Corporation

SPECfp2006 = **40.0**

## Express5800/T110d (Intel Xeon E5-2403)

SPECfp\_base2006 = **39.1**

CPU2006 license: 9006

Test sponsor: NEC Corporation

Tested by: NEC Corporation

Test date: Jul-2012

Hardware Availability: May-2012

Software Availability: Dec-2011

L3 Cache: 10 MB I+D on chip per chip  
Other Cache: None  
Memory: 48 GB (6 x 8 GB 2Rx4 PC3L-12800R-11, ECC, running at 1066 MHz and CL7)  
Disk Subsystem: 1 x 250 GB SATA, 7200 RPM  
Other Hardware: None

System State: Run level 3 (multi-user)  
Base Pointers: 64-bit  
Peak Pointers: 32/64-bit  
Other Software: None

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	129	105	<b><u>127</u></b>	<b><u>107</u></b>	127	107	<b><u>127</u></b>	107	<b><u>127</u></b>	107	<b><u>127</u></b>	<b><u>107</u></b>
416.gamess	1111	17.6	<b><u>1116</u></b>	<b><u>17.5</u></b>	1116	17.5	1036	18.9	<b><u>1038</u></b>	<b><u>18.9</u></b>	1039	18.8
433.milc	235	39.0	<b><u>235</u></b>	<b><u>39.0</u></b>	235	39.0	232	39.6	232	39.5	<b><u>232</u></b>	<b><u>39.6</u></b>
434.zeusmp	145	62.6	<b><u>145</u></b>	<b><u>62.6</u></b>	145	62.6	145	62.6	<b><u>145</u></b>	<b><u>62.6</u></b>	145	62.6
435.gromacs	375	19.0	<b><u>376</u></b>	<b><u>19.0</u></b>	377	18.9	375	19.0	<b><u>376</u></b>	<b><u>19.0</u></b>	377	18.9
436.cactusADM	89.5	133	<b><u>87.5</u></b>	<b><u>137</u></b>	87.5	137	89.5	133	<b><u>87.5</u></b>	<b><u>137</u></b>	87.5	137
437.leslie3d	<b><u>145</u></b>	<b><u>65.0</u></b>	143	65.7	145	64.8	<b><u>145</u></b>	<b><u>65.0</u></b>	143	65.7	145	64.8
444.namd	653	12.3	653	12.3	<b><u>653</u></b>	<b><u>12.3</u></b>	642	12.5	643	12.5	<b><u>642</u></b>	<b><u>12.5</u></b>
447.dealII	373	30.7	375	30.5	<b><u>373</u></b>	<b><u>30.7</u></b>	373	30.7	375	30.5	<b><u>373</u></b>	<b><u>30.7</u></b>
450.soplex	362	23.1	364	22.9	<b><u>364</u></b>	<b><u>22.9</u></b>	362	23.1	364	22.9	<b><u>364</u></b>	<b><u>22.9</u></b>
453.povray	<b><u>232</u></b>	<b><u>23.0</u></b>	235	22.7	229	23.3	193	27.5	196	27.1	<b><u>196</u></b>	<b><u>27.1</u></b>
454.calculix	374	22.0	373	22.1	<b><u>373</u></b>	<b><u>22.1</u></b>	369	22.4	<b><u>369</u></b>	<b><u>22.4</u></b>	370	22.3
459.GemsFDTD	<b><u>198</u></b>	<b><u>53.6</u></b>	198	53.7	198	53.6	<b><u>187</u></b>	<b><u>56.8</u></b>	187	56.8	187	56.8
465.tonto	452	21.8	<b><u>453</u></b>	<b><u>21.7</u></b>	454	21.7	<b><u>427</u></b>	<b><u>23.0</u></b>	431	22.8	427	23.1
470.lbm	<b><u>105</u></b>	<b><u>131</u></b>	105	131	106	129	<b><u>105</u></b>	<b><u>131</u></b>	105	131	106	129
481.wrf	203	55.0	<b><u>204</u></b>	<b><u>54.8</u></b>	204	54.8	203	55.0	<b><u>204</u></b>	<b><u>54.8</u></b>	204	54.8
482.sphinx3	<b><u>472</u></b>	<b><u>41.3</u></b>	472	41.3	474	41.1	<b><u>472</u></b>	<b><u>41.3</u></b>	472	41.3	474	41.1

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

BIOS Settings:  
Energy Performance: Performance

## General Notes

Environment variables set by runspec before the start of the run:  
KMP\_AFFINITY = "granularity=fine,compact,1,0"  
LD\_LIBRARY\_PATH = "/home/cpu2006/libs/32:/home/cpu2006/libs/64"  
OMP\_NUM\_THREADS = "4"

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation	SPECfp2006 =	40.0
Express5800/T110d (Intel Xeon E5-2403)	SPECfp_base2006 =	39.1

CPU2006 license: 9006	Test date:	Jul-2012
Test sponsor: NEC Corporation	Hardware Availability:	May-2012
Tested by: NEC Corporation	Software Availability:	Dec-2011

## General Notes (Continued)

Added glibc-static-2.12-1.47.el6.x86\_64.rpm  
to enable static linking

Transparent Huge Pages enabled with:  
echo always > /sys/kernel/mm/redhat\_transparent\_hugepage/enabled

## Base Compiler Invocation

C benchmarks:  
icc -m64

C++ benchmarks:  
icpc -m64

Fortran benchmarks:  
ifort -m64

Benchmarks using both Fortran and C:  
icc -m64 ifort -m64

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.dealII: -DSPEC\_CPU\_LP64  
450.soplex: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
482.sphinx3: -DSPEC\_CPU\_LP64

## Base Optimization Flags

C benchmarks:  
-xAVX -ipo -O3 -no-prec-div -static -parallel -opt-prefetch  
-ansi-alias

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation **SPECfp2006 = 40.0**

Express5800/T110d (Intel Xeon E5-2403) **SPECfp\_base2006 = 39.1**

CPU2006 license: 9006

Test sponsor: NEC Corporation

Tested by: NEC Corporation

Test date: Jul-2012

Hardware Availability: May-2012

Software Availability: Dec-2011

## Base Optimization Flags (Continued)

C++ benchmarks:

`-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -ansi-alias`

Fortran benchmarks:

`-xAVX -ipo -O3 -no-prec-div -static -parallel -opt-prefetch`

Benchmarks using both Fortran and C:

`-xAVX -ipo -O3 -no-prec-div -static -parallel -opt-prefetch  
-ansi-alias`

## Peak Compiler Invocation

C benchmarks:

`icc -m64`

C++ benchmarks:

`icpc -m64`

Fortran benchmarks:

`ifort -m64`

Benchmarks using both Fortran and C:

`icc -m64 ifort -m64`

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

433.milc: `-xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -static -auto-ilp32  
-ansi-alias`

470.lbm: `basepeak = yes`

482.sphinx3: `basepeak = yes`

C++ benchmarks:

444.namd: `-xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -fno-alias  
-auto-ilp32`

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

SPECfp2006 = 40.0

Express5800/T110d (Intel Xeon E5-2403)

SPECfp\_base2006 = 39.1

CPU2006 license: 9006

Test date: Jul-2012

Test sponsor: NEC Corporation

Hardware Availability: May-2012

Tested by: NEC Corporation

Software Availability: Dec-2011

## Peak Optimization Flags (Continued)

447.dealII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -ansi-alias

### Fortran benchmarks:

410.bwaves: -xAVX -ipo -O3 -no-prec-div -opt-prefetch -parallel  
-static

416.gamess: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2  
-inline-level=0 -scalar-rep- -static

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2  
-inline-level=0 -opt-prefetch -parallel

465.tonto: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -inline-calloc  
-opt-malloc-options=3 -auto -unroll4

### Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

454.calculix: -xAVX -ipo -O3 -no-prec-div -auto-ilp32 -ansi-alias

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20120425.html>

<http://www.spec.org/cpu2006/flags/NEC-Platform-Settings-V1.2-R120d-RevA.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20120425.xml>

<http://www.spec.org/cpu2006/flags/NEC-Platform-Settings-V1.2-R120d-RevA.xml>



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

SPECfp2006 = 40.0

Express5800/T110d (Intel Xeon E5-2403)

SPECfp\_base2006 = 39.1

CPU2006 license: 9006

Test sponsor: NEC Corporation

Tested by: NEC Corporation

Test date: Jul-2012

Hardware Availability: May-2012

Software Availability: Dec-2011

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Thu Jul 24 10:57:59 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 29 August 2012.