



SPEC[®] CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

SPECfp[®]2006 = **77.8**

NovaScale R470 F3 (Intel Xeon E5-4650, 2.70 GHz)

SPECfp_base2006 = **73.3**

CPU2006 license: 20


Test date: Aug-2012

Test sponsor: Bull SAS

Hardware Availability: Jul-2012

Tested by: Dell Inc.

Software Availability: Jun-2012

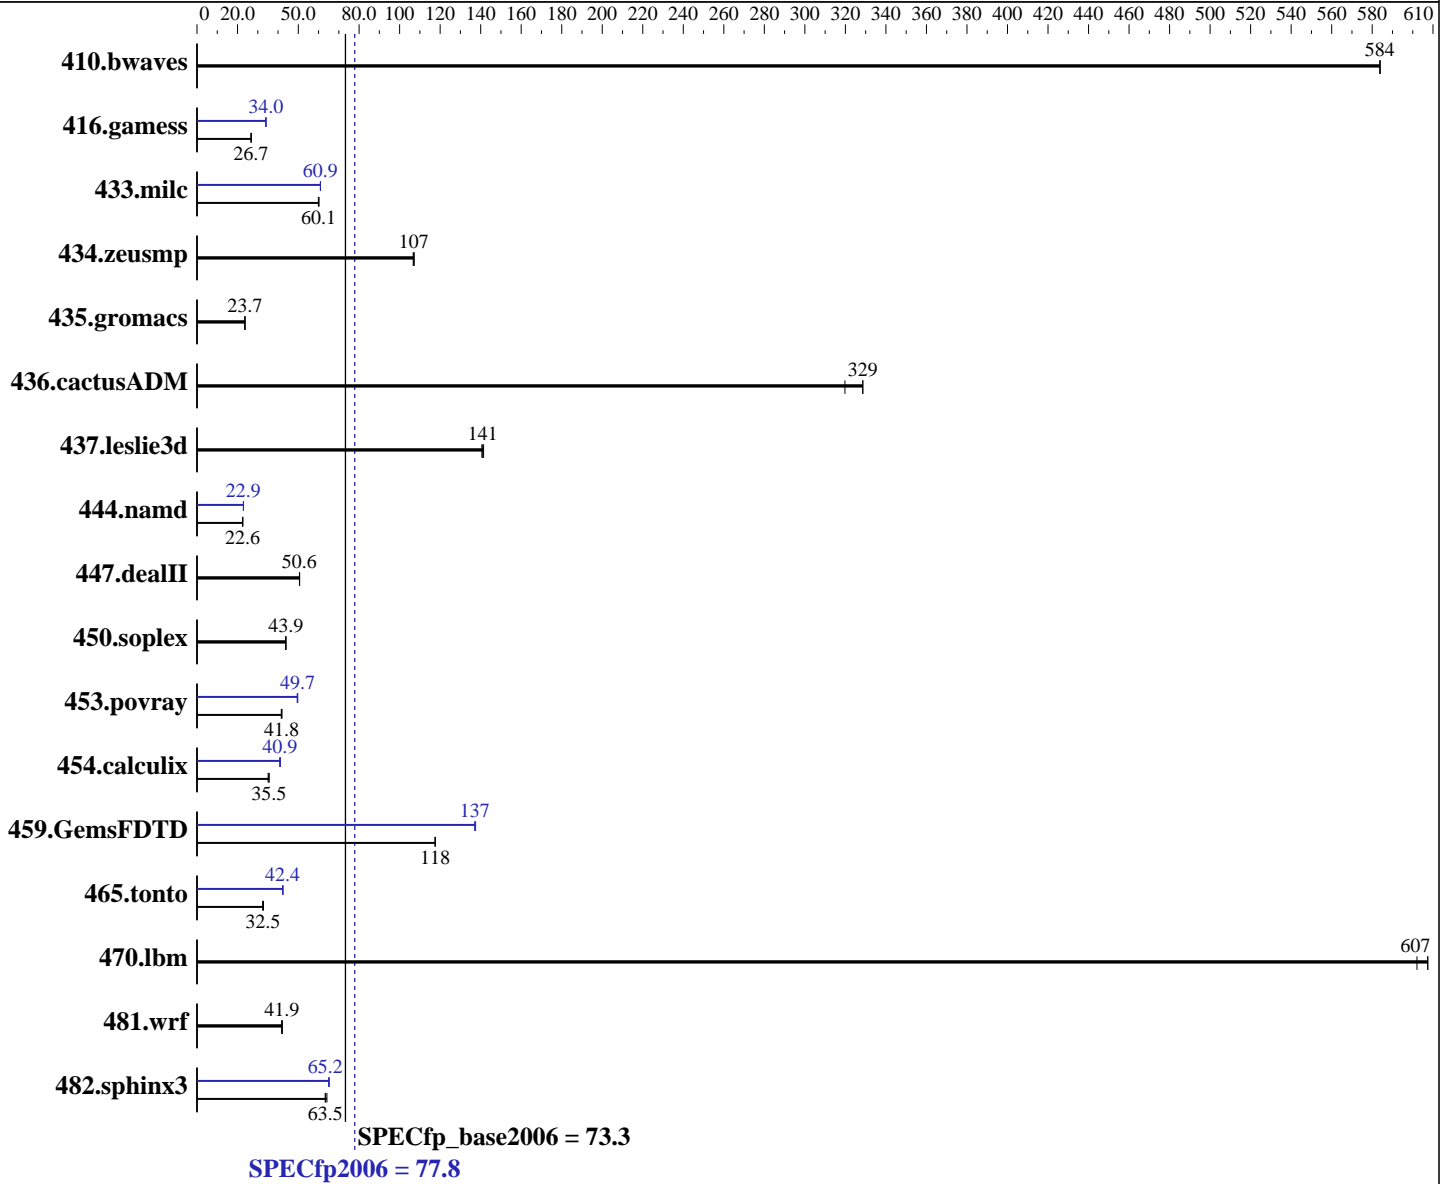

Hardware

CPU Name: Intel Xeon E5-4650
 CPU Characteristics: Intel Turbo Boost Technology up to 3.30 GHz
 CPU MHz: 2700
 FPU: Integrated
 CPU(s) enabled: 32 cores, 4 chips, 8 cores/chip
 CPU(s) orderable: 2,4 chip
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

Software

Operating System: Red Hat Enterprise Linux Server release 6.3 (Santiago)
 2.6.32-279.el6.x86_64
 Compiler: C/C++: Version 12.1.0.225 of Intel C++ Studio XE for Linux;
 Fortran: Version 12.1.0.225 of Intel Fortran Studio XE for Linux
 Auto Parallel: Yes
 File System: ext4

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

SPECfp2006 = **77.8**

NovaScale R470 F3 (Intel Xeon E5-4650, 2.70 GHz)

SPECfp_base2006 = **73.3**

CPU2006 license: 20

Test date: Aug-2012

Test sponsor: Bull SAS

Hardware Availability: Jul-2012

Tested by: Dell Inc.

Software Availability: Jun-2012

L3 Cache: 20 MB I+D on chip per chip
 Other Cache: None
 Memory: 256 GB (32 x 8 GB 2Rx4 PC3-12800R-11, ECC)
 Disk Subsystem: 1 x 300 GB 15000 RPM SAS
 Other Hardware: None

System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 32/64-bit
 Other Software: None

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	23.3	584	<u>23.3</u>	<u>584</u>	23.3	584	23.3	584	<u>23.3</u>	<u>584</u>	23.3	584
416.gamess	<u>733</u>	<u>26.7</u>	733	26.7	734	26.7	<u>575</u>	<u>34.0</u>	575	34.1	577	34.0
433.milc	153	59.9	153	60.2	<u>153</u>	<u>60.1</u>	151	60.9	<u>151</u>	<u>60.9</u>	151	60.9
434.zeusmp	84.9	107	<u>85.1</u>	<u>107</u>	85.3	107	84.9	107	<u>85.1</u>	<u>107</u>	85.3	107
435.gromacs	303	23.6	<u>301</u>	<u>23.7</u>	301	23.7	303	23.6	<u>301</u>	<u>23.7</u>	301	23.7
436.cactusADM	37.4	320	36.4	329	<u>36.4</u>	<u>329</u>	37.4	320	36.4	329	<u>36.4</u>	<u>329</u>
437.leslie3d	<u>66.7</u>	<u>141</u>	66.5	141	66.9	141	<u>66.7</u>	<u>141</u>	66.5	141	66.9	141
444.namd	<u>356</u>	<u>22.6</u>	355	22.6	356	22.6	350	22.9	<u>350</u>	<u>22.9</u>	350	22.9
447.dealII	226	50.7	226	50.6	<u>226</u>	<u>50.6</u>	226	50.7	226	50.6	<u>226</u>	<u>50.6</u>
450.soplex	190	43.9	<u>190</u>	<u>43.9</u>	190	43.8	190	43.9	<u>190</u>	<u>43.9</u>	190	43.8
453.povray	127	41.9	128	41.6	<u>127</u>	<u>41.8</u>	108	49.4	107	49.7	<u>107</u>	<u>49.7</u>
454.calculix	<u>232</u>	<u>35.5</u>	235	35.1	232	35.6	200	41.2	<u>202</u>	<u>40.9</u>	202	40.9
459.GemsFDTD	<u>90.3</u>	<u>118</u>	90.3	118	90.3	118	77.2	138	<u>77.4</u>	<u>137</u>	77.4	137
465.tonto	303	32.5	<u>303</u>	<u>32.5</u>	300	32.8	<u>232</u>	<u>42.4</u>	232	42.4	232	42.3
470.lbm	22.8	602	22.6	607	<u>22.6</u>	<u>607</u>	22.8	602	22.6	607	<u>22.6</u>	<u>607</u>
481.wrf	<u>267</u>	<u>41.9</u>	265	42.1	267	41.8	<u>267</u>	<u>41.9</u>	265	42.1	267	41.8
482.sphinx3	<u>307</u>	<u>63.5</u>	308	63.3	304	64.1	300	65.0	299	65.2	<u>299</u>	<u>65.2</u>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

System Profile set to Custom
 CPU Power Management set to Maximum Performance
 Memory Frequency set to Maximum Performance
 Turbo Boost set to Enabled
 C States/C1E set to Enabled
 Logical processor set to Disabled
 Sysinfo program /root/cpu2006-1.2/config/sysinfo.rev6800
 \$Rev: 6800 \$ \$Date:: 2011-10-11 #\$ 6f2ebdff5032aaa42e583f96b07f99d3
 running on localhost.localdomain Mon Aug 6 17:01:09 2012

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

SPECfp2006 = 77.8

NovaScale R470 F3 (Intel Xeon E5-4650, 2.70 GHz)

SPECfp_base2006 = 73.3

CPU2006 license: 20
Test sponsor: Bull SAS
Tested by: Dell Inc.

Test date: Aug-2012
Hardware Availability: Jul-2012
Software Availability: Jun-2012

Platform Notes (Continued)

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see: <http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E5-4650 0 @ 2.70GHz
 4 "physical id"s (chips)
32 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
  cpu cores : 8
  siblings  : 8
  physical 0: cores 0 1 2 3 4 5 6 7
  physical 1: cores 0 1 2 3 4 5 6 7
  physical 2: cores 0 1 2 3 4 5 6 7
  physical 3: cores 0 1 2 3 4 5 6 7
cache size : 20480 KB
```

```
From /proc/meminfo
MemTotal: 264482264 kB
HugePages_Total: 0
Hugepagesize: 2048 kB
```

```
/usr/bin/lsb_release -d
Red Hat Enterprise Linux Server release 6.3 (Santiago)
```

```
From /etc/*release* /etc/*version*
redhat-release: Red Hat Enterprise Linux Server release 6.3 (Santiago)
system-release: Red Hat Enterprise Linux Server release 6.3 (Santiago)
system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server
```

```
uname -a:
Linux localhost.localdomain 2.6.32-279.el6.x86_64 #1 SMP Wed Jun 13 18:24:36
EDT 2012 x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 Aug 6 10:54 last=5
```

```
SPEC is set to: /root/cpu2006-1.2
Filesystem Type Size Used Avail Use% Mounted on
/dev/sdal ext4 250G 9.9G 228G 5% /
```

```
Additional information from dmidecode:
Memory:
15x 00AD00B300AD HMT31GR7BFR4C-PB 8 GB 1600 MHz 2 rank
7x 00AD04B300AD HMT31GR7BFR4C-PB 8 GB 1600 MHz 2 rank
10x 00CE00B300CE M393B1K70DH0-CK0 8 GB 1600 MHz 2 rank
```

(End of data from sysinfo program)



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

SPECfp2006 = 77.8

NovaScale R470 F3 (Intel Xeon E5-4650, 2.70 GHz)

SPECfp_base2006 = 73.3

CPU2006 license: 20

Test date: Aug-2012

Test sponsor: Bull SAS

Hardware Availability: Jul-2012

Tested by: Dell Inc.

Software Availability: Jun-2012

General Notes

Environment variables set by runspec before the start of the run:

```
KMP_AFFINITY = "granularity=fine,scatter"
LD_LIBRARY_PATH = "/root/cpu2006-1.2/libs/32:/root/cpu2006-1.2/libs/64"
OMP_NUM_THREADS = "16"
```

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB memory using RHEL5.5

Transparent Huge Pages disabled with:

```
echo never > /sys/kernel/mm/redhat_transparent_hugepage/enabled
```

Filesystem page cache cleared with:

```
echo 1> /proc/sys/vm/drop_caches
```

The Dell PowerEdge R820 and

the Bull NovaScale R470 F3 models are electronically equivalent.

The results have been measured on a Dell PowerEdge R820 model

Base Compiler Invocation

C benchmarks:

```
icc -m64
```

C++ benchmarks:

```
icpc -m64
```

Fortran benchmarks:

```
ifort -m64
```

Benchmarks using both Fortran and C:

```
icc -m64 ifort -m64
```

Base Portability Flags

```
410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.lelie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.deallI: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
```

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

http://www.spec.org/

Page 4



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

SPECfp2006 = 77.8

NovaScale R470 F3 (Intel Xeon E5-4650, 2.70 GHz)

SPECfp_base2006 = 73.3

CPU2006 license: 20
Test sponsor: Bull SAS
Tested by: Dell Inc.

Test date: Aug-2012
Hardware Availability: Jul-2012
Software Availability: Jun-2012

Base Portability Flags (Continued)

482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:

-xAVX -ipo -O3 -no-prec-div -static -parallel -opt-prefetch
-ansi-alias

C++ benchmarks:

-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -ansi-alias

Fortran benchmarks:

-xAVX -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

Benchmarks using both Fortran and C:

-xAVX -ipo -O3 -no-prec-div -static -parallel -opt-prefetch
-ansi-alias

Peak Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

433.milc: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -static -auto-ilp32
-ansi-alias

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

SPECfp2006 = 77.8

NovaScale R470 F3 (Intel Xeon E5-4650, 2.70 GHz)

SPECfp_base2006 = 73.3

CPU2006 license: 20

Test date: Aug-2012

Test sponsor: Bull SAS

Hardware Availability: Jul-2012

Tested by: Dell Inc.

Software Availability: Jun-2012

Peak Optimization Flags (Continued)

470.lbm: basepeak = yes

482.sphinx3: -xAVX -ipo -O3 -no-prec-div -unroll2 -ansi-alias
-parallel

C++ benchmarks:

444.namd: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -fno-alias
-auto-ilp32

447.dealIII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2
-inline-level=0 -scalar-rep- -static

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2
-inline-level=0 -opt-prefetch -parallel

465.tonto: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -inline-calloc
-opt-malloc-options=3 -auto -unroll4

Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

454.calculix: -xAVX -ipo -O3 -no-prec-div -auto-ilp32 -ansi-alias

481.wrf: basepeak = yes



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

SPECfp2006 = 77.8

NovaScale R470 F3 (Intel Xeon E5-4650, 2.70 GHz)

SPECfp_base2006 = 73.3

CPU2006 license: 20

Test sponsor: Bull SAS

Tested by: Dell Inc.

Test date: Aug-2012

Hardware Availability: Jul-2012

Software Availability: Jun-2012

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.html>

<http://www.spec.org/cpu2006/flags/Dell-Platform-Settings-V1.2-revA.20120410.00.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.xml>

<http://www.spec.org/cpu2006/flags/Dell-Platform-Settings-V1.2-revA.20120410.00.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Thu Jul 24 11:07:46 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 29 August 2012.