



# SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Acer Incorporated

SPECfp®2006 = **63.6**

### Acer AR320 F2 (Intel Xeon E3-1230 v2)

SPECfp\_base2006 = **61.9**

CPU2006 license: 97


Test sponsor: Acer Incorporated

Tested by: Acer Incorporated

Test date: Jun-2012

Hardware Availability: Jan-2012

Software Availability: Dec-2011

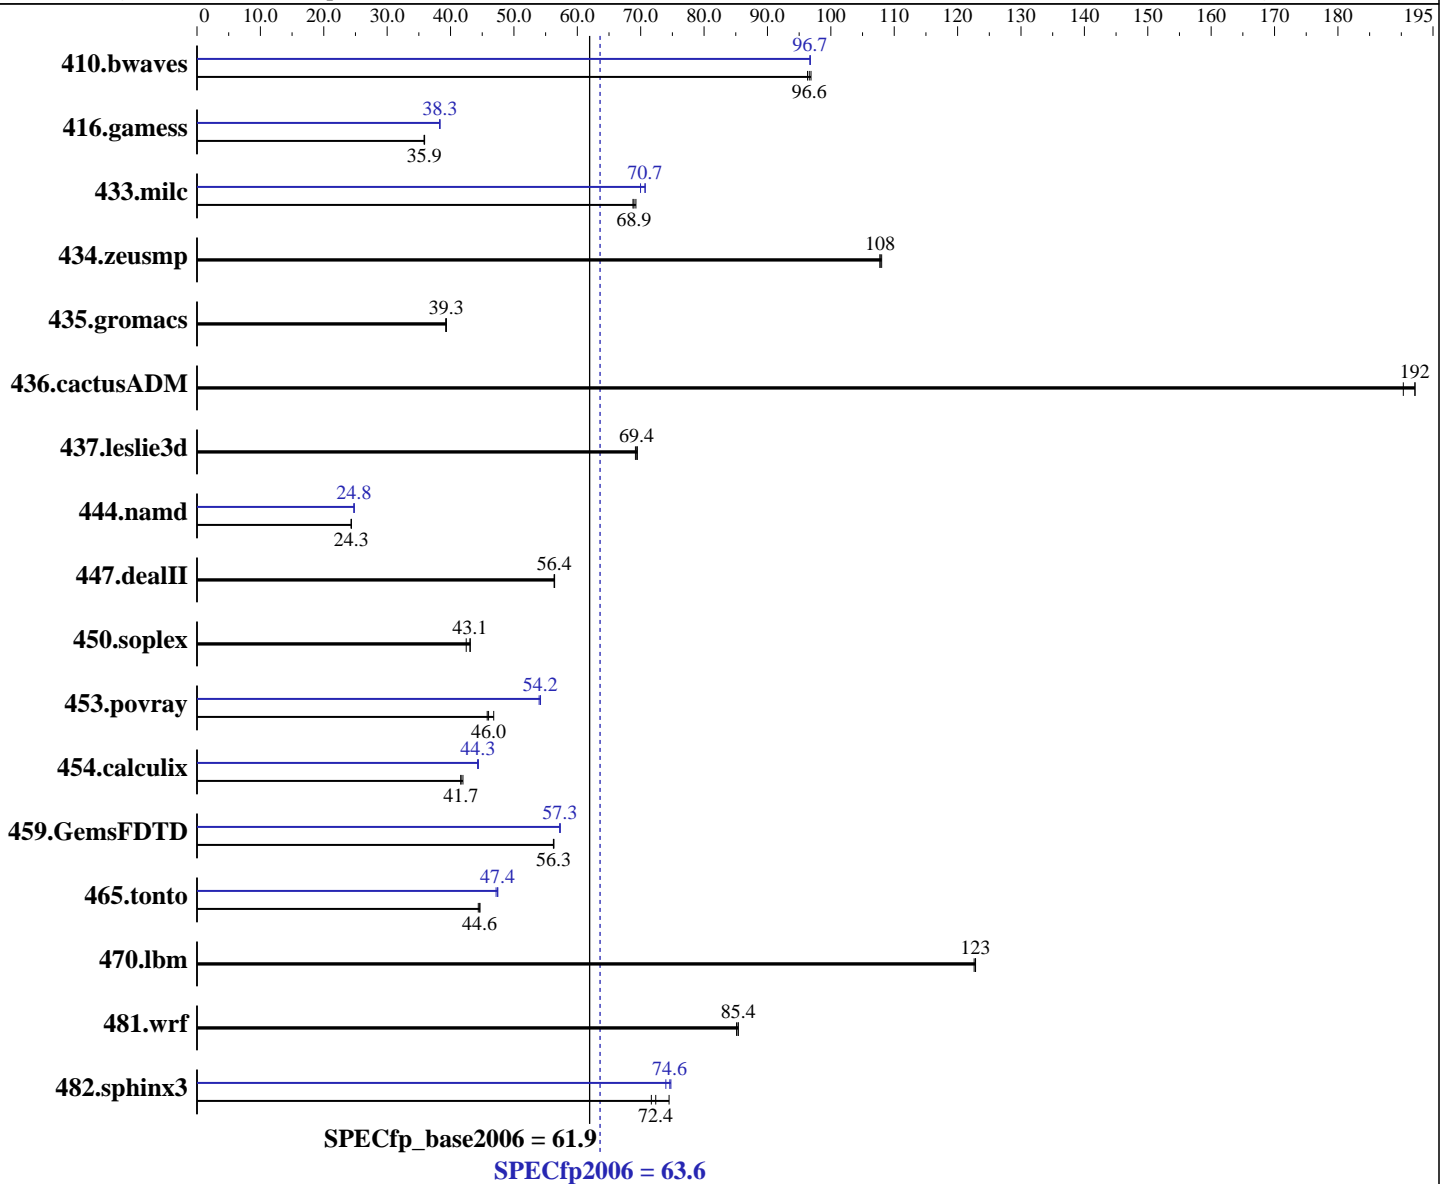

### Hardware

CPU Name: Intel Xeon E3-1230 v2  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.70 GHz  
 CPU MHz: 3300  
 FPU: Integrated  
 CPU(s) enabled: 4 cores, 1 chip, 4 cores/chip, 2 threads/core  
 CPU(s) orderable: 1 chip  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

### Software

Operating System: Red Hat Enterprise Linux Server release 6.1 (Santiago)  
 2.6.32-131.0.15.el6.x86\_64  
 Compiler: C/C++: Version 12.1.0.225 of Intel C++ Studio XE for Linux;  
 Fortran: Version 12.1.0.225 of Intel Fortran Studio XE for Linux  
 Auto Parallel: Yes  
 File System: ext4

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Acer Incorporated

SPECfp2006 = 63.6

Acer AR320 F2 (Intel Xeon E3-1230 v2)

SPECfp\_base2006 = 61.9

CPU2006 license: 97

Test sponsor: Acer Incorporated

Tested by: Acer Incorporated

Test date: Jun-2012

Hardware Availability: Jan-2012

Software Availability: Dec-2011

L3 Cache: 8 MB I+D on chip per chip  
Other Cache: None  
Memory: 16 GB (2 x 8 GB 2Rx8 PC3-10600E-9,ECC)  
Disk Subsystem: 1 x 500 GB SATA, 7200 RPM  
Other Hardware: None

System State: Run level 3 (multi-user)  
Base Pointers: 64-bit  
Peak Pointers: 32/64-bit  
Other Software: None

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	140	96.9	<b>141</b>	<b>96.6</b>	141	96.3	140	96.7	140	96.7	<b>140</b>	<b>96.7</b>
416.gamess	545	35.9	<b>546</b>	<b>35.9</b>	546	35.8	511	38.3	<b>511</b>	<b>38.3</b>	511	38.3
433.milc	133	69.2	<b>133</b>	<b>68.9</b>	133	68.8	<b>130</b>	<b>70.7</b>	131	70.0	130	70.7
434.zeusmp	84.4	108	<b>84.4</b>	<b>108</b>	84.2	108	84.4	108	<b>84.4</b>	<b>108</b>	84.2	108
435.gromacs	<b>182</b>	<b>39.3</b>	182	39.2	182	39.3	<b>182</b>	<b>39.3</b>	182	39.2	182	39.3
436.cactusADM	<b>62.2</b>	<b>192</b>	62.2	192	62.8	190	<b>62.2</b>	<b>192</b>	62.2	192	62.8	190
437.leslie3d	<b>135</b>	<b>69.4</b>	135	69.5	136	69.2	<b>135</b>	<b>69.4</b>	135	69.5	136	69.2
444.namd	<b>329</b>	<b>24.3</b>	329	24.3	330	24.3	324	24.8	<b>324</b>	<b>24.8</b>	323	24.8
447.dealII	203	56.4	203	56.4	<b>203</b>	<b>56.4</b>	203	56.4	203	56.4	<b>203</b>	<b>56.4</b>
450.soplex	<b>194</b>	<b>43.1</b>	193	43.1	196	42.5	<b>194</b>	<b>43.1</b>	193	43.1	196	42.5
453.povray	116	45.8	114	46.8	<b>116</b>	<b>46.0</b>	98.6	54.0	98.2	54.2	<b>98.2</b>	<b>54.2</b>
454.calculix	197	42.0	<b>198</b>	<b>41.7</b>	198	41.6	186	44.4	<b>186</b>	<b>44.3</b>	186	44.3
459.GemsFDTD	<b>188</b>	<b>56.3</b>	188	56.3	189	56.2	185	57.2	185	57.3	<b>185</b>	<b>57.3</b>
465.tonto	<b>221</b>	<b>44.6</b>	221	44.6	222	44.4	209	47.2	<b>207</b>	<b>47.4</b>	207	47.4
470.lbm	112	123	112	123	<b>112</b>	<b>123</b>	112	123	112	123	<b>112</b>	<b>123</b>
481.wrf	<b>131</b>	<b>85.4</b>	131	85.4	131	85.1	<b>131</b>	<b>85.4</b>	131	85.4	131	85.1
482.sphinx3	262	74.5	272	71.7	<b>269</b>	<b>72.4</b>	<b>261</b>	<b>74.6</b>	263	74.0	261	74.8

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

Sysinfo program /usr/cpu2006/config/sysinfo.rev6800  
\$Rev: 6800 \$ \$Date:: 2011-10-11 #\$ 6f2ebdff5032aaa42e583f96b07f99d3  
running on localhost.localdomain Fri Jun 15 19:14:09 2012

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:  
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo  
model name : Intel(R) Xeon(R) CPU E3-1230 V2 @ 3.30GHz  
Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Acer Incorporated**

**SPECfp2006 = 63.6**

**Acer AR320 F2 (Intel Xeon E3-1230 v2)**

**SPECfp\_base2006 = 61.9**

**CPU2006 license:** 97

**Test sponsor:** Acer Incorporated

**Tested by:** Acer Incorporated

**Test date:** Jun-2012

**Hardware Availability:** Jan-2012

**Software Availability:** Dec-2011

## Platform Notes (Continued)

```

1 "physical id"s (chips)
8 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
  cpu cores : 4
  siblings  : 8
  physical 0: cores 0 1 2 3
cache size : 8192 KB

From /proc/meminfo
MemTotal:      16300896 kB
HugePages_Total:    0
Hugepagesize:    2048 kB

/usr/bin/lsb_release -d
  Red Hat Enterprise Linux Server release 6.1 (Santiago)

From /etc/*release* /etc/*version*
redhat-release: Red Hat Enterprise Linux Server release 6.1 (Santiago)
system-release: Red Hat Enterprise Linux Server release 6.1 (Santiago)
system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server

uname -a:
Linux localhost.localdomain 2.6.32-131.0.15.el6.x86_64 #1 SMP Tue May 10
15:42:40 EDT 2011 x86_64 x86_64 x86_64 GNU/Linux

run-level 3 Jun 15 19:12 last=5

SPEC is set to: /usr/cpu2006
Filesystem      Type      Size  Used Avail Use% Mounted on
/dev/mapper/VolGroup-lv_root
                ext4      50G   42G   5.2G  90% /

Additional information from dmidecode:
Memory:
  2x Hynix/Hyundai HMT41GU7MFR8A-H9 8 GB 1333 MHz 2 rank

(End of data from sysinfo program)

```

## General Notes

Environment variables set by runspec before the start of the run:

```

KMP_AFFINITY = "granularity=fine,scatter"
LD_LIBRARY_PATH = "/usr/cpu2006/libs/32:/usr/cpu2006/libs/64"
OMP_NUM_THREADS = "4"

```

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB memory using RHEL6.1  
Transparent Huge Pages enabled with:  
echo always > /sys/kernel/mm/redhat\_transparent\_hugepage/enabled

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Acer Incorporated      SPECfp2006 =      63.6

Acer AR320 F2 (Intel Xeon E3-1230 v2)      SPECfp\_base2006 =      61.9

<b>CPU2006 license:</b> 97	<b>Test date:</b> Jun-2012
<b>Test sponsor:</b> Acer Incorporated	<b>Hardware Availability:</b> Jan-2012
<b>Tested by:</b> Acer Incorporated	<b>Software Availability:</b> Dec-2011

## General Notes (Continued)

runspec command invoked through numactl i.e.:  
numactl --interleave=all runspec <etc>

## Base Compiler Invocation

C benchmarks:  
    icc    -m64

C++ benchmarks:  
    icpc  -m64

Fortran benchmarks:  
    ifort -m64

Benchmarks using both Fortran and C:  
    icc    -m64 ifort -m64

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.dealII: -DSPEC\_CPU\_LP64  
450.soplex: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
482.sphinx3: -DSPEC\_CPU\_LP64

## Base Optimization Flags

C benchmarks:  
    -xAVX -ipo -O3 -no-prec-div -static -parallel -opt-prefetch  
    -ansi-alias

C++ benchmarks:  
    -xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -ansi-alias

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Acer Incorporated**

**SPECfp2006 = 63.6**

**Acer AR320 F2 (Intel Xeon E3-1230 v2)**

**SPECfp\_base2006 = 61.9**

**CPU2006 license:** 97

**Test sponsor:** Acer Incorporated

**Tested by:** Acer Incorporated

**Test date:** Jun-2012

**Hardware Availability:** Jan-2012

**Software Availability:** Dec-2011

## Base Optimization Flags (Continued)

Fortran benchmarks:

`-xAVX -ipo -O3 -no-prec-div -static -parallel -opt-prefetch`

Benchmarks using both Fortran and C:

`-xAVX -ipo -O3 -no-prec-div -static -parallel -opt-prefetch  
-ansi-alias`

## Peak Compiler Invocation

C benchmarks:

`icc -m64`

C++ benchmarks:

`icpc -m64`

Fortran benchmarks:

`ifort -m64`

Benchmarks using both Fortran and C:

`icc -m64 ifort -m64`

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

433.milc: `-xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -static -auto-ilp32  
-ansi-alias`

470.lbm: `basepeak = yes`

482.sphinx3: `-xAVX -ipo -O3 -no-prec-div -unroll2 -ansi-alias  
-parallel`

C++ benchmarks:

444.namd: `-xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -fno-alias  
-auto-ilp32`

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Acer Incorporated      SPECfp2006 = 63.6

Acer AR320 F2 (Intel Xeon E3-1230 v2)      SPECfp\_base2006 = 61.9

<b>CPU2006 license:</b> 97	<b>Test date:</b> Jun-2012
<b>Test sponsor:</b> Acer Incorporated	<b>Hardware Availability:</b> Jan-2012
<b>Tested by:</b> Acer Incorporated	<b>Software Availability:</b> Dec-2011

## Peak Optimization Flags (Continued)

447.deallI: basepeak = yes

450.soplex: basepeak = yes

453.povray: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -ansi-alias

### Fortran benchmarks:

410.bwaves: -xAVX -ipo -O3 -no-prec-div -opt-prefetch -parallel  
-static

416.gamess: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2  
-inline-level=0 -scalar-rep- -static

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2  
-inline-level=0 -opt-prefetch -parallel

465.tonto: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -inline-calloc  
-opt-malloc-options=3 -auto -unroll4

### Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

454.calculix: -xAVX -ipo -O3 -no-prec-div -auto-ilp32 -ansi-alias

481.wrf: basepeak = yes

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.xml>



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Acer Incorporated      **SPECfp2006 =**      **63.6**

Acer AR320 F2 (Intel Xeon E3-1230 v2)      **SPECfp\_base2006 =**      **61.9**

<b>CPU2006 license:</b> 97	<b>Test date:</b> Jun-2012
<b>Test sponsor:</b> Acer Incorporated	<b>Hardware Availability:</b> Jan-2012
<b>Tested by:</b> Acer Incorporated	<b>Software Availability:</b> Dec-2011

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Thu Jul 24 12:53:36 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 9 October 2012.