



# SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## IBM Corporation

IBM System x3300 M4  
(Intel Xeon E5-2403, 1.80 GHz)

SPECfp®2006 = 44.2

SPECfp\_base2006 = 42.5

CPU2006 license: 11


Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: Oct-2012

Hardware Availability: Aug-2012

Software Availability: Dec-2011

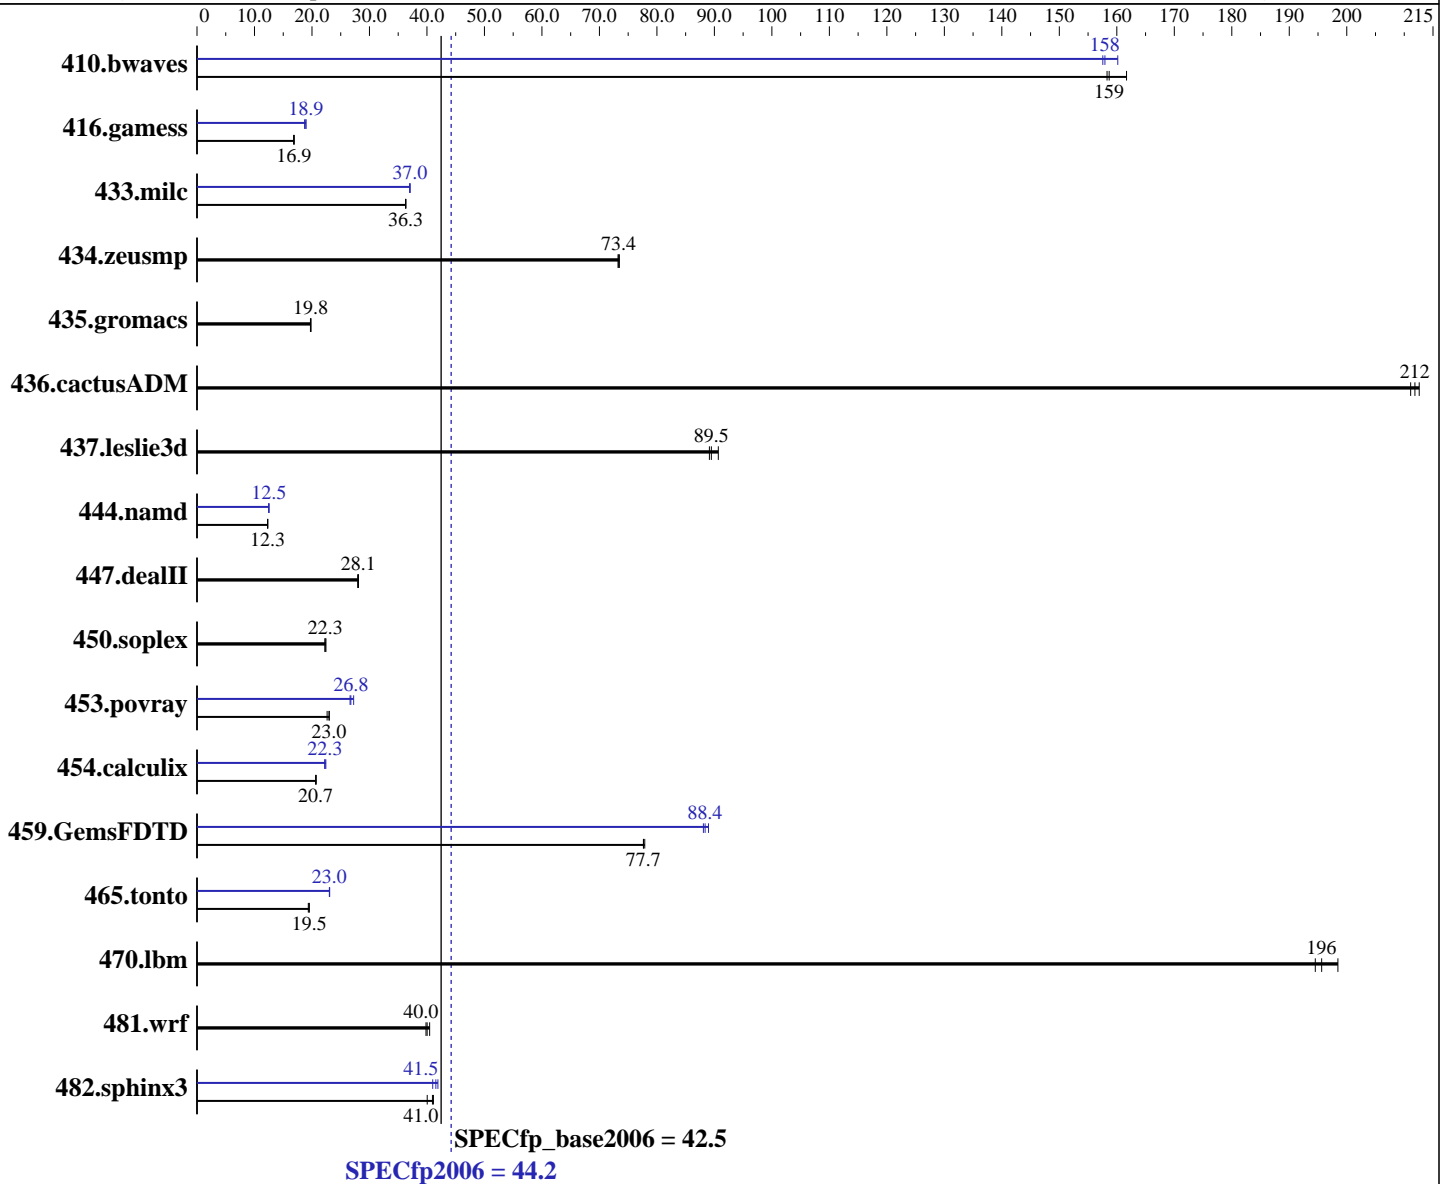

### Hardware

CPU Name: Intel Xeon E5-2403  
 CPU Characteristics:  
 CPU MHz: 1800  
 FPU: Integrated  
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

### Software

Operating System: Red Hat Enterprise Linux Server release 6.2 (Santiago)  
 2.6.32-220.el6.x86\_64  
 Compiler: C/C++: Version 12.1.0.225 of Intel C++ Studio XE for Linux;  
 Fortran: Version 12.1.0.225 of Intel Fortran Studio XE for Linux  
 Auto Parallel: Yes  
 File System: ext4

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## IBM Corporation

IBM System x3300 M4  
(Intel Xeon E5-2403, 1.80 GHz)

SPECfp2006 = 44.2

SPECfp\_base2006 = 42.5

CPU2006 license: 11

Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: Oct-2012

Hardware Availability: Aug-2012

Software Availability: Dec-2011

L3 Cache: 10 MB I+D on chip per chip  
Other Cache: None  
Memory: 96 GB (12 x 8 GB 2Rx4 PC3-12800R-11, ECC, running at 1066 MHz)  
Disk Subsystem: 1 x 2 TB SATA, 7200 RPM  
Other Hardware: None

System State: Run level 3 (multi-user)  
Base Pointers: 64-bit  
Peak Pointers: 32/64-bit  
Other Software: None

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	85.8	158	<b>85.6</b>	<b>159</b>	84.0	162	<b>86.1</b>	<b>158</b>	84.8	160	86.3	158
416.gamess	1159	16.9	1165	16.8	<b>1159</b>	<b>16.9</b>	1033	19.0	<b>1034</b>	<b>18.9</b>	1046	18.7
433.milc	253	36.3	253	36.3	<b>253</b>	<b>36.3</b>	248	37.1	248	37.0	<b>248</b>	<b>37.0</b>
434.zeusmp	124	73.5	124	73.2	<b>124</b>	<b>73.4</b>	124	73.5	124	73.2	<b>124</b>	<b>73.4</b>
435.gromacs	360	19.8	<b>361</b>	<b>19.8</b>	362	19.7	360	19.8	<b>361</b>	<b>19.8</b>	362	19.7
436.cactusADM	56.6	211	<b>56.4</b>	<b>212</b>	56.2	213	56.6	211	<b>56.4</b>	<b>212</b>	56.2	213
437.leslie3d	105	89.1	<b>105</b>	<b>89.5</b>	104	90.7	105	89.1	<b>105</b>	<b>89.5</b>	104	90.7
444.namd	<b>652</b>	<b>12.3</b>	652	12.3	652	12.3	641	12.5	<b>641</b>	<b>12.5</b>	642	12.5
447.dealII	408	28.1	<b>408</b>	<b>28.1</b>	409	28.0	408	28.1	<b>408</b>	<b>28.1</b>	409	28.0
450.soplex	375	22.3	<b>374</b>	<b>22.3</b>	372	22.4	375	22.3	<b>374</b>	<b>22.3</b>	372	22.4
453.povray	<b>232</b>	<b>23.0</b>	235	22.6	231	23.0	200	26.6	195	27.2	<b>199</b>	<b>26.8</b>
454.calculix	<b>399</b>	<b>20.7</b>	398	20.7	400	20.7	<b>370</b>	<b>22.3</b>	368	22.4	371	22.2
459.GemsFDTD	<b>137</b>	<b>77.7</b>	136	77.9	137	77.7	<b>120</b>	<b>88.4</b>	119	89.0	120	88.1
465.tonto	504	19.5	508	19.4	<b>504</b>	<b>19.5</b>	427	23.0	426	23.1	<b>427</b>	<b>23.0</b>
470.lbm	70.6	195	<b>70.2</b>	<b>196</b>	69.2	198	70.6	195	<b>70.2</b>	<b>196</b>	69.2	198
481.wrf	280	39.8	276	40.5	<b>279</b>	<b>40.0</b>	280	39.8	276	40.5	<b>279</b>	<b>40.0</b>
482.sphinx3	<b>476</b>	<b>41.0</b>	474	41.1	487	40.0	475	41.0	<b>469</b>	<b>41.5</b>	465	41.9

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
Zone reclaim mode enabled with:
echo 1 > /proc/sys/vm/zone_reclaim_mode
```

## Platform Notes

```
BIOS setting:
Operating Mode set to Maximum Performance
Sysinfo program /home/SPECcpul.2/config/sysinfo.rev6800
$Rev: 6800 $ $Date:: 2011-10-11 #$ 6f2ebdff5032aaa42e583f96b07f99d3
running on YungAn Fri Oct 5 19:28:30 2012
```

This section contains SUT (System Under Test) info as seen by

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**IBM Corporation**

**SPECfp2006 = 44.2**

IBM System x3300 M4  
(Intel Xeon E5-2403, 1.80 GHz)

**SPECfp\_base2006 = 42.5**

**CPU2006 license:** 11

**Test date:** Oct-2012

**Test sponsor:** IBM Corporation

**Hardware Availability:** Aug-2012

**Tested by:** IBM Corporation

**Software Availability:** Dec-2011

## Platform Notes (Continued)

some common utilities. To remove or add to this section, see:  
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name      : Intel(R) Xeon(R) CPU E5-2403 0 @ 1.80GHz
 2 "physical id"s (chips)
 8 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
cpu cores      : 4
siblings       : 4
physical 0:    cores 0 1 2 3
physical 1:    cores 0 1 2 3
cache size     : 10240 KB
```

```
From /proc/meminfo
MemTotal:      99045896 kB
HugePages_Total: 0
Hugepagesize:  2048 kB
```

```
/usr/bin/lsb_release -d
Red Hat Enterprise Linux Server release 6.2 (Santiago)
```

```
From /etc/*release* /etc/*version*
redhat-release: Red Hat Enterprise Linux Server release 6.2 (Santiago)
system-release: Red Hat Enterprise Linux Server release 6.2 (Santiago)
system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server
```

```
uname -a:
Linux YungAn 2.6.32-220.el6.x86_64 #1 SMP Wed Nov 9 08:03:13 EST 2011 x86_64
x86_64 x86_64 GNU/Linux
```

```
run-level 3 Oct 5 19:26
```

```
SPEC is set to: /home/SPECcpul.2
Filesystem      Type      Size  Used Avail Use% Mounted on
/dev/mapper/vg_yungan-lv_home
ext4            1.7T    65G  1.6T   5% /home
```

Additional information from dmidecode:

```
Memory:
12x Samsung M393B1K70DH0-CK0 8 GB 1600 MHz 2 rank
```

(End of data from sysinfo program)

## General Notes

Environment variables set by runspec before the start of the run:  
KMP\_AFFINITY = "granularity=fine,compact,1,0"  
LD\_LIBRARY\_PATH = "/home/SPECcpul.2/libs/32:/home/SPECcpul.2/libs/64"

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**IBM Corporation**

IBM System x3300 M4  
(Intel Xeon E5-2403, 1.80 GHz)

**SPECfp2006 = 44.2**

**SPECfp\_base2006 = 42.5**

**CPU2006 license:** 11  
**Test sponsor:** IBM Corporation  
**Tested by:** IBM Corporation

**Test date:** Oct-2012  
**Hardware Availability:** Aug-2012  
**Software Availability:** Dec-2011

## General Notes (Continued)

OMP\_NUM\_THREADS = "8"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB memory using RHEL5.5  
Transparent Huge Pages enabled with:  
echo always > /sys/kernel/mm/redhat\_transparent\_hugepage/enabled

## Base Compiler Invocation

C benchmarks:  
icc -m64

C++ benchmarks:  
icpc -m64

Fortran benchmarks:  
ifort -m64

Benchmarks using both Fortran and C:  
icc -m64 ifort -m64

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.dealII: -DSPEC\_CPU\_LP64  
450.soplex: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
482.sphinx3: -DSPEC\_CPU\_LP64

## Base Optimization Flags

C benchmarks:  
-xAVX -ipo -O3 -no-prec-div -static -parallel -opt-prefetch  
-ansi-alias

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**IBM Corporation**

IBM System x3300 M4  
(Intel Xeon E5-2403, 1.80 GHz)

**SPECfp2006 = 44.2**

**SPECfp\_base2006 = 42.5**

**CPU2006 license:** 11

**Test sponsor:** IBM Corporation

**Tested by:** IBM Corporation

**Test date:** Oct-2012

**Hardware Availability:** Aug-2012

**Software Availability:** Dec-2011

## Base Optimization Flags (Continued)

C++ benchmarks:

`-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -ansi-alias`

Fortran benchmarks:

`-xAVX -ipo -O3 -no-prec-div -static -parallel -opt-prefetch`

Benchmarks using both Fortran and C:

`-xAVX -ipo -O3 -no-prec-div -static -parallel -opt-prefetch  
-ansi-alias`

## Peak Compiler Invocation

C benchmarks:

`icc -m64`

C++ benchmarks:

`icpc -m64`

Fortran benchmarks:

`ifort -m64`

Benchmarks using both Fortran and C:

`icc -m64 ifort -m64`

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

`433.milc: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -static -auto-ilp32  
-ansi-alias`

`470.lbm: basepeak = yes`

`482.sphinx3: -xAVX -ipo -O3 -no-prec-div -unroll2 -ansi-alias  
-parallel`

C++ benchmarks:

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**IBM Corporation**

IBM System x3300 M4  
(Intel Xeon E5-2403, 1.80 GHz)

**SPECfp2006 = 44.2**

**SPECfp\_base2006 = 42.5**

**CPU2006 license:** 11

**Test sponsor:** IBM Corporation

**Tested by:** IBM Corporation

**Test date:** Oct-2012

**Hardware Availability:** Aug-2012

**Software Availability:** Dec-2011

## Peak Optimization Flags (Continued)

444.namd: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -fno-alias  
-auto-ilp32

447.dealIII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -ansi-alias

### Fortran benchmarks:

410.bwaves: -xAVX -ipo -O3 -no-prec-div -opt-prefetch -parallel  
-static

416.gamess: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2  
-inline-level=0 -scalar-rep- -static

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2  
-inline-level=0 -opt-prefetch -parallel

465.tonto: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -inline-calloc  
-opt-malloc-options=3 -auto -unroll4

### Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

454.calculix: -xAVX -ipo -O3 -no-prec-div -auto-ilp32 -ansi-alias

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20120425.html>

<http://www.spec.org/cpu2006/flags/IBM-Platform-Flags-V1.2-SNB-C.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20120425.xml>

<http://www.spec.org/cpu2006/flags/IBM-Platform-Flags-V1.2-SNB-C.xml>



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**IBM Corporation**

IBM System x3300 M4  
(Intel Xeon E5-2403, 1.80 GHz)

**SPECfp2006 = 44.2**

**SPECfp\_base2006 = 42.5**

**CPU2006 license:** 11  
**Test sponsor:** IBM Corporation  
**Tested by:** IBM Corporation

**Test date:** Oct-2012  
**Hardware Availability:** Aug-2012  
**Software Availability:** Dec-2011

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Thu Jul 24 13:10:56 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 6 November 2012.