



# SPEC<sup>®</sup> CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

SPECfp<sup>®</sup>2006 = **65.3**

SuperServer 7047R-TRF (X9DRI-F, Intel E5-2620)

SPECfp\_base2006 = **62.0**

CPU2006 license: 001176


Test date: Oct-2012

Test sponsor: Supermicro

Hardware Availability: Jan-2012

Tested by: Supermicro

Software Availability: Dec-2011

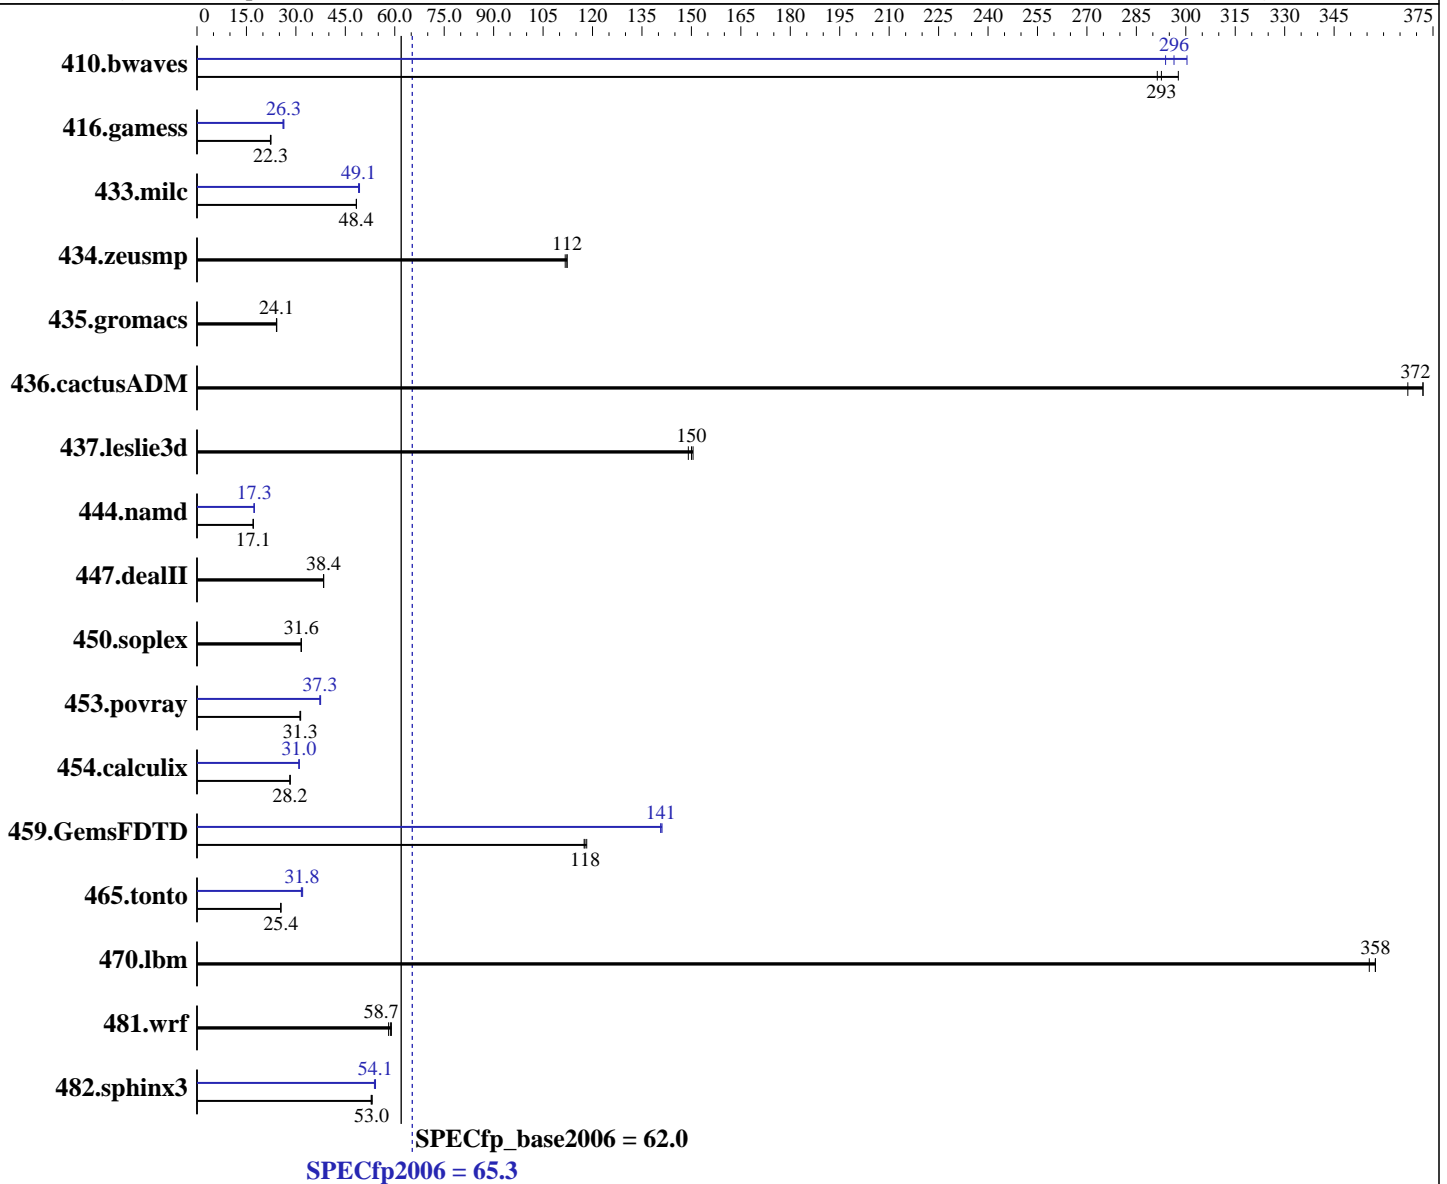

**Hardware**

CPU Name: Intel Xeon E5-2620  
 CPU Characteristics: Intel Turbo Boost Technology up to 2.50 GHz  
 CPU MHz: 2000  
 FPU: Integrated  
 CPU(s) enabled: 12 cores, 2 chips, 6 cores/chip, 2 threads/core  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

**Software**

Operating System: Red Hat Enterprise Linux Server Release 6.2 (Santiago), Kernel 2.6.32-220.el6.x86\_64  
 Compiler: C/C++: Version 12.1.0.225 of Intel C++ Studio XE for Linux; Fortran: Version 12.1.0.225 of Intel Fortran Studio XE for Linux  
 Auto Parallel: Yes  
 File System: ext4

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

SPECfp2006 = **65.3**

SuperServer 7047R-TRF (X9DRI-F, Intel E5-2620)

SPECfp\_base2006 = **62.0**

CPU2006 license: 001176

Test date: Oct-2012

Test sponsor: Supermicro

Hardware Availability: Jan-2012

Tested by: Supermicro

Software Availability: Dec-2011

L3 Cache: 15 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 128 GB (16 x 8 GB 2Rx4 PC3-12800R-11, ECC, running at 1333 MHz and CL9)  
 Disk Subsystem: 1 x 500 GB SATA II, 7200 RPM  
 Other Hardware: None

System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 32/64-bit  
 Other Software: None

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	46.6	291	45.6	298	<b>46.4</b>	<b>293</b>	<b>45.8</b>	<b>296</b>	45.2	300	46.2	294
416.gamess	873	22.4	879	22.3	<b>876</b>	<b>22.3</b>	751	26.1	744	26.3	<b>744</b>	<b>26.3</b>
433.milc	190	48.4	<b>190</b>	<b>48.4</b>	190	48.4	186	49.3	<b>187</b>	<b>49.1</b>	187	49.0
434.zeusmp	81.5	112	<b>81.1</b>	<b>112</b>	81.1	112	81.5	112	<b>81.1</b>	<b>112</b>	81.1	112
435.gromacs	295	24.2	296	24.1	<b>296</b>	<b>24.1</b>	295	24.2	296	24.1	<b>296</b>	<b>24.1</b>
436.cactusADM	32.5	367	32.1	372	<b>32.1</b>	<b>372</b>	32.5	367	32.1	372	<b>32.1</b>	<b>372</b>
437.leslie3d	62.5	151	<b>62.7</b>	<b>150</b>	63.1	149	62.5	151	<b>62.7</b>	<b>150</b>	63.1	149
444.namd	470	17.1	<b>470</b>	<b>17.1</b>	470	17.1	<b>462</b>	<b>17.3</b>	462	17.4	462	17.3
447.dealII	298	38.4	<b>298</b>	<b>38.4</b>	298	38.4	298	38.4	<b>298</b>	<b>38.4</b>	298	38.4
450.soplex	<b>264</b>	<b>31.6</b>	264	31.6	263	31.7	<b>264</b>	<b>31.6</b>	264	31.6	263	31.7
453.povray	169	31.5	<b>170</b>	<b>31.3</b>	170	31.3	143	37.3	<b>143</b>	<b>37.3</b>	142	37.5
454.calculix	292	28.2	<b>292</b>	<b>28.2</b>	292	28.3	267	30.9	<b>266</b>	<b>31.0</b>	266	31.0
459.GemsFDTD	<b>90.1</b>	<b>118</b>	90.3	117	89.7	118	<b>75.4</b>	<b>141</b>	75.2	141	75.4	141
465.tonto	<b>387</b>	<b>25.4</b>	387	25.4	387	25.4	311	31.7	<b>309</b>	<b>31.8</b>	307	32.1
470.lbm	38.4	358	<b>38.4</b>	<b>358</b>	38.6	356	38.4	358	<b>38.4</b>	<b>358</b>	38.6	356
481.wrf	192	58.1	189	59.0	<b>190</b>	<b>58.7</b>	192	58.1	189	59.0	<b>190</b>	<b>58.7</b>
482.sphinx3	<b>368</b>	<b>53.0</b>	369	52.8	367	53.2	360	54.2	<b>360</b>	<b>54.1</b>	362	53.8

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## General Notes

Environment variables set by runspec before the start of the run:  
 KMP\_AFFINITY = "granularity=fine,scatter"  
 LD\_LIBRARY\_PATH = "/home/cpu2006/libs/32:/home/cpu2006/libs/64"  
 OMP\_NUM\_THREADS = "12"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB memory using RHEL5.5  
 Transparent Huge Pages enabled with:  
 echo always > /sys/kernel/mm/redhat\_transparent\_hugepage/enabled



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Supermicro**

**SPECfp2006 = 65.3**

SuperServer 7047R-TRF (X9DRI-F, Intel E5-2620)

**SPECfp\_base2006 = 62.0**

**CPU2006 license:** 001176

**Test date:** Oct-2012

**Test sponsor:** Supermicro

**Hardware Availability:** Jan-2012

**Tested by:** Supermicro

**Software Availability:** Dec-2011

## Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
 416.gamess: -DSPEC\_CPU\_LP64  
 433.milc: -DSPEC\_CPU\_LP64  
 434.zeusmp: -DSPEC\_CPU\_LP64  
 435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
 436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
 437.leslie3d: -DSPEC\_CPU\_LP64  
 444.namd: -DSPEC\_CPU\_LP64  
 447.dealII: -DSPEC\_CPU\_LP64  
 450.soplex: -DSPEC\_CPU\_LP64  
 453.povray: -DSPEC\_CPU\_LP64  
 454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
 459.GemsFDTD: -DSPEC\_CPU\_LP64  
 465.tonto: -DSPEC\_CPU\_LP64  
 470.lbm: -DSPEC\_CPU\_LP64  
 481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
 482.sphinx3: -DSPEC\_CPU\_LP64

## Base Optimization Flags

C benchmarks:

-xAVX -ipo -O3 -no-prec-div -static -parallel -opt-prefetch  
-ansi-alias

C++ benchmarks:

-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -ansi-alias

Fortran benchmarks:

-xAVX -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

Benchmarks using both Fortran and C:

-xAVX -ipo -O3 -no-prec-div -static -parallel -opt-prefetch  
-ansi-alias



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

**SPECfp2006 = 65.3**

SuperServer 7047R-TRF (X9DRI-F, Intel E5-2620)

**SPECfp\_base2006 = 62.0**

**CPU2006 license:** 001176

**Test date:** Oct-2012

**Test sponsor:** Supermicro

**Hardware Availability:** Jan-2012

**Tested by:** Supermicro

**Software Availability:** Dec-2011

## Peak Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

433.milc: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -static -auto-ilp32  
-ansi-alias

470.lbm: basepeak = yes

482.sphinx3: -xAVX -ipo -O3 -no-prec-div -unroll2 -ansi-alias  
-parallel

C++ benchmarks:

444.namd: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -fno-alias  
-auto-ilp32

447.dealIII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: -xAVX -ipo -O3 -no-prec-div -opt-prefetch -parallel  
-static

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Supermicro**

**SPECfp2006 = 65.3**

SuperServer 7047R-TRF (X9DRI-F, Intel E5-2620)

**SPECfp\_base2006 = 62.0**

**CPU2006 license:** 001176

**Test date:** Oct-2012

**Test sponsor:** Supermicro

**Hardware Availability:** Jan-2012

**Tested by:** Supermicro

**Software Availability:** Dec-2011

## Peak Optimization Flags (Continued)

416.gamess: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2  
-inline-level=0 -scalar-rep- -static

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2  
-inline-level=0 -opt-prefetch -parallel

465.tonto: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -inline-calloc  
-opt-malloc-options=3 -auto -unroll4

Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

454.calculix: -xAVX -ipo -O3 -no-prec-div -auto-ilp32 -ansi-alias

481.wrf: basepeak = yes

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Thu Jul 24 13:16:05 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 6 November 2012.