



# SPEC<sup>®</sup> CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

Supermicro Processor Blade SBA-7222G-T2, (BHDGT,  
Opteron 6378)  
AMD Opteron 6378

SPECfp<sup>®</sup>\_rate2006 = 285

SPECfp\_rate\_base2006 = 261

CPU2006 license: 001176


Test sponsor: Supermicro

Tested by: Supermicro

Test date: Oct-2012

Hardware Availability: Nov-2012

Software Availability: Aug-2012

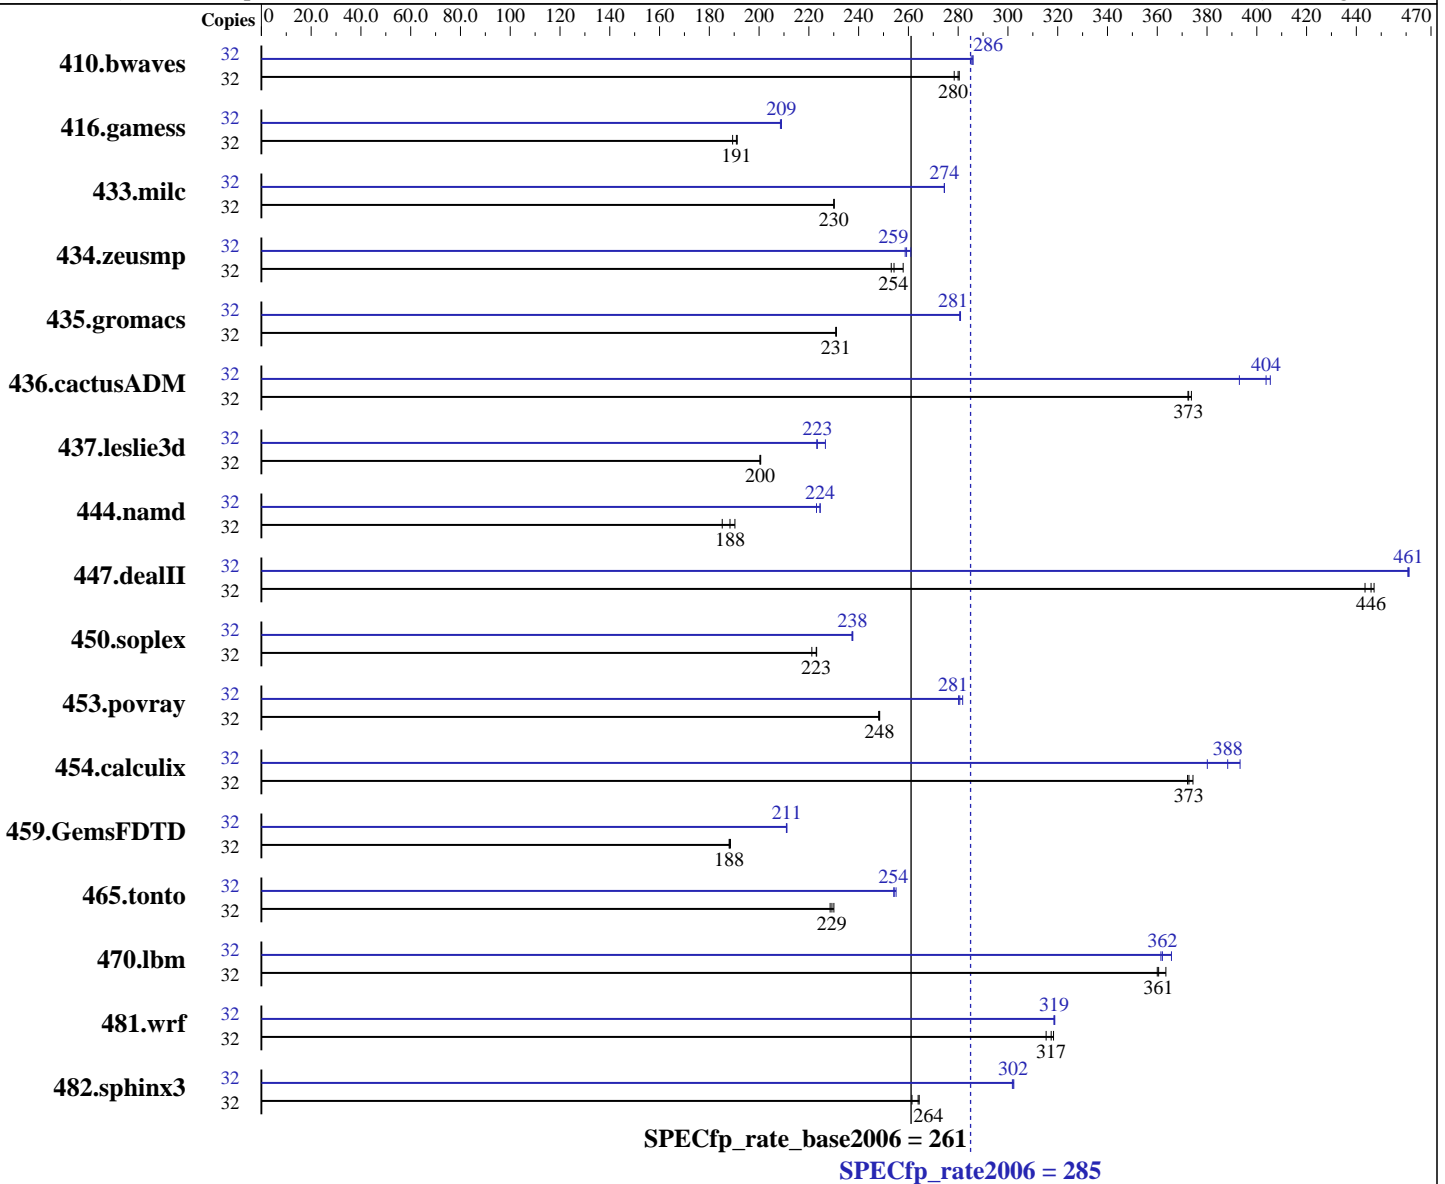

### Hardware

CPU Name: AMD Opteron 6378  
 CPU Characteristics: AMD Turbo CORE technology up to 3.30 GHz  
 CPU MHz: 2400  
 FPU: Integrated  
 CPU(s) enabled: 32 cores, 2 chips, 16 cores/chip  
 CPU(s) orderable: 1,2 chips

Continued on next page

### Software

Operating System: Red Hat Enterprise Linux Server release 6.2,  
Kernel 2.6.32-220.el6.x86\_64  
 Compiler: C/C++/Fortran: Version 4.5.2 of x86 Open64  
Compiler Suite (from AMD)  
 Auto Parallel: No  
 File System: ext3  
 System State: Run level 3 (Full multiuser with network)  
 Base Pointers: 64-bit  
 Peak Pointers: 32/64-bit

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

Supermicro Processor Blade SBA-7222G-T2, (BHDGT,  
Opteron 6378)  
AMD Opteron 6378

SPECfp\_rate2006 = 285

SPECfp\_rate\_base2006 = 261

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: Oct-2012

Hardware Availability: Nov-2012

Software Availability: Aug-2012

Primary Cache: 512 KB I on chip per chip,  
64 KB I shared / 2 cores;  
16 KB D on chip per core  
Secondary Cache: 16 MB I+D on chip per chip, 2 MB shared / 2 cores  
L3 Cache: 16 MB I+D on chip per chip, 8 MB shared / 8 cores  
Other Cache: None  
Memory: 64 GB (8 x 8 GB 2Rx4 PC3-12800R-11, ECC)  
Disk Subsystem: 1 x 500 GB SATA, 7200 RPM  
Other Hardware: None

Other Software: None

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	32	1562	278	1551	280	<b>1553</b>	<b>280</b>	32	1525	285	1521	286	<b>1521</b>	<b>286</b>
416.gamess	32	<b>3283</b>	<b>191</b>	3309	189	3277	191	32	3004	209	<b>2999</b>	<b>209</b>	2998	209
433.milc	32	<b>1277</b>	<b>230</b>	1276	230	1277	230	32	1070	274	1070	275	<b>1070</b>	<b>274</b>
434.zeusmp	32	1150	253	1129	258	<b>1145</b>	<b>254</b>	32	1126	259	1116	261	<b>1123</b>	<b>259</b>
435.gromacs	32	989	231	990	231	<b>990</b>	<b>231</b>	32	<b>814</b>	<b>281</b>	814	281	813	281
436.cactusADM	32	1023	374	1027	372	<b>1026</b>	<b>373</b>	32	943	405	<b>947</b>	<b>404</b>	973	393
437.leslie3d	32	<b>1501</b>	<b>200</b>	1501	200	1499	201	32	1348	223	1327	227	<b>1346</b>	<b>223</b>
444.namd	32	1386	185	1349	190	<b>1363</b>	<b>188</b>	32	1150	223	1143	225	<b>1143</b>	<b>224</b>
447.dealII	32	825	443	<b>821</b>	<b>446</b>	819	447	32	794	461	795	461	<b>794</b>	<b>461</b>
450.soplex	32	1196	223	1207	221	<b>1197</b>	<b>223</b>	32	1125	237	1123	238	<b>1123</b>	<b>238</b>
453.povray	32	<b>685</b>	<b>248</b>	686	248	685	248	32	604	282	<b>607</b>	<b>281</b>	608	280
454.calculix	32	<b>708</b>	<b>373</b>	709	372	705	374	32	<b>680</b>	<b>388</b>	671	393	695	380
459.GemsFDTD	32	<b>1806</b>	<b>188</b>	1801	189	1806	188	32	<b>1608</b>	<b>211</b>	1609	211	1608	211
465.tonto	32	1378	229	<b>1373</b>	<b>229</b>	1369	230	32	1235	255	<b>1238</b>	<b>254</b>	1239	254
470.lbm	32	1210	363	1221	360	<b>1219</b>	<b>361</b>	32	1202	366	<b>1214</b>	<b>362</b>	1216	361
481.wrf	32	1133	315	1123	318	<b>1126</b>	<b>317</b>	32	<b>1122</b>	<b>319</b>	1121	319	1122	319
482.sphinx3	32	2386	261	<b>2363</b>	<b>264</b>	2359	264	32	<b>2065</b>	<b>302</b>	2067	302	2063	302

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used.  
'numactl' was used to bind copies to the cores.  
See the configuration file for details.

## Operating System Notes

'ulimit -s unlimited' was used to set environment stack size  
'ulimit -l 2097152' was used to set environment locked pages in memory limit

Transparent huge pages were enabled for this run (OS default)

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

Supermicro Processor Blade SBA-7222G-T2, (BHDGT,  
Opteron 6378)  
AMD Opteron 6378

SPECfp\_rate2006 = 285

SPECfp\_rate\_base2006 = 261

**CPU2006 license:** 001176  
**Test sponsor:** Supermicro  
**Tested by:** Supermicro

**Test date:** Oct-2012  
**Hardware Availability:** Nov-2012  
**Software Availability:** Aug-2012

## Operating System Notes (Continued)

Huge pages were not configured for this run.

## General Notes

Environment variables set by runspec before the start of the run:

LD\_LIBRARY\_PATH = "/home/spec/amd1206-rate-libs-revA/32:/home/spec/amd1206-rate-libs-revA/64"

The x86 Open64 Compiler Suite is only available from (and supported by) AMD at  
<http://developer.amd.com/cpu/open64>

Binaries were compiled on a system with 2x AMD Opteron 6386SE chips + 128GB Memory using RHEL 6.3

## Base Compiler Invocation

C benchmarks:  
openc

C++ benchmarks:  
openCC

Fortran benchmarks:  
openf95

Benchmarks using both Fortran and C:  
openc openf95

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64  
436.cactusADM: -DSPEC\_CPU\_LP64 -fno-second-underscore  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.dealII: -DSPEC\_CPU\_LP64  
450.soplex: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LINUX -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LP64  
-fno-second-underscore

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

Supermicro Processor Blade SBA-7222G-T2, (BHDGT,  
Opteron 6378)  
AMD Opteron 6378

SPECfp\_rate2006 = 285

SPECfp\_rate\_base2006 = 261

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: Oct-2012

Hardware Availability: Nov-2012

Software Availability: Aug-2012

## Base Portability Flags (Continued)

482.sphinx3: -DSPEC\_CPU\_LP64

## Base Optimization Flags

### C benchmarks:

-Ofast -OPT:malloc\_alg=1 -HP:bd=2m:heap=2m -IPA:plimit=8000  
-IPA:small\_pu=100 -mso -march=bdver1

### C++ benchmarks:

-Ofast -static -CG:load\_exe=0 -OPT:malloc\_alg=1 -INLINE:aggressive=on  
-HP:bd=2m:heap=2m -D\_\_OPEN64\_FAST\_SET -march=bdver1

### Fortran benchmarks:

-Ofast -LNO:blocking=off -LNO:simd\_peel\_align=on -OPT:rsqrt=2  
-OPT:unroll\_size=256 -HP:bd=2m:heap=2m -mso -march=bdver1

### Benchmarks using both Fortran and C:

-Ofast -OPT:malloc\_alg=1 -HP:bd=2m:heap=2m -IPA:plimit=8000  
-IPA:small\_pu=100 -mso -march=bdver1 -LNO:blocking=off  
-LNO:simd\_peel\_align=on -OPT:rsqrt=2 -OPT:unroll\_size=256

## Peak Compiler Invocation

### C benchmarks:

opencc

### C++ benchmarks:

openCC

### Fortran benchmarks:

openf95

### Benchmarks using both Fortran and C:

opencc openf95

## Peak Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64  
436.cactusADM: -DSPEC\_CPU\_LP64 -fno-second-underscore

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

Supermicro Processor Blade SBA-7222G-T2, (BHDGT,  
Opteron 6378)  
AMD Opteron 6378

SPECfp\_rate2006 = 285

SPECfp\_rate\_base2006 = 261

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: Oct-2012

Hardware Availability: Nov-2012

Software Availability: Aug-2012

## Peak Portability Flags (Continued)

```

437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LINUX -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LP64
-fno-second-underscore

```

## Peak Optimization Flags

C benchmarks:

```

433.milc: -Ofast -CG:movnti=1 -CG:locs_best=on -HP:bdt=2m:heap=2m
-IPA:plimit=7000 -IPA:callee_limit=1200
-OPT:struct_array_copy=2 -OPT:alias=field_sensitive -mso
-march=bdver1

470.lbm: -Ofast -CG:cmp_peep=on -OPT:keep_ext=on -HP:bdt=2m:heap=2m
-IPA:plimit=8000 -IPA:small_pu=100 -march=bdver1 -mso

482.sphinx3: -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -Ofast
-m32 -IPA:plimit=1000 -OPT:malloc_alg=2 -CG:cmp_peep=on
-CG:p2align=0 -CG:load_exe=1 -CG:dsched=on
-INLINE:aggressive=on -LNO:prefetch=2 -LNO:prefetch_ahead=4
-mso -march=bdver2

```

C++ benchmarks:

```

444.namd: -Ofast -IPA:plimit=3000 -LNO:ignore_feedback=off
-CG:local_sched_alg=0 -CG:load_exe=0 -OPT:unroll_size=256
-fno-exceptions -HP:bdt=2m:heap=2m -LNO:if_select_conv=1
-OPT:alias=disjoint -LNO:psimd_iso_unroll=ON -march=bdver1

447.dealIII: -Ofast -D__OPEN64_FAST_SET -static -INLINE:aggressive=on
-LNO:opt=1 -LNO:simd=2 -fno-emit-exceptions -m32
-OPT:unroll_times_max=8 -OPT:unroll_size=256
-OPT:unroll_level=2 -HP:bdt=2m:heap=2m -GRA:unspill=on
-CG:cmp_peep=on -CG:movext_icmp=off -TENV:frame_pointer=off
-march=bdver1

450.soplex: -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -O3
-LNO:ignore_feedback=off -INLINE:aggressive=on -OPT:RO=1
-OPT:IEEE_arith=3 -OPT:IEEE_NaN_Inf=off
-OPT:fold_unsigned_relops=on -fno-exceptions -CG:p2align=0
-m32 -mno-fma4 -HP:bdt=2m:heap=2m -WOPT:sib=on
-march=bdver1

```

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

Supermicro Processor Blade SBA-7222G-T2, (BHDGT,  
Opteron 6378)  
AMD Opteron 6378

SPECfp\_rate2006 = 285

SPECfp\_rate\_base2006 = 261

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: Oct-2012

Hardware Availability: Nov-2012

Software Availability: Aug-2012

## Peak Optimization Flags (Continued)

453.povray: -fb\_create fbdata(pass 1) -fb\_opt fbdata(pass 2) -Ofast  
-CG:pre\_local\_sched=off -CG:p2align=0 -CG:p2align\_split=on  
-CG:dsched=on -INLINE:aggressive=on -HP:bd=2m:heap=2m  
-OPT:transform=2 -OPT:alias=disjoint -WOPT:aggcm=0  
-march=bdver2

### Fortran benchmarks:

410.bwaves: -fb\_create fbdata(pass 1) -fb\_opt fbdata(pass 2) -Ofast  
-OPT:Ofast -OPT:treeheight=on -LNO:blocking=off  
-LNO:ignore\_feedback=off -LNO:fu=4 -LNO:loop\_model\_simd=on  
-LNO:simd\_rm\_unity\_remainder=on -WOPT:aggstr=0  
-HP:bd=2m:heap=2m -CG:cmp\_peep=on -march=bdver1

416.gamess: -fb\_create fbdata(pass 1) -fb\_opt fbdata(pass 2) -Ofast  
-LNO:fu=6 -LNO:blocking=0 -LNO:simd=2 -OPT:ro=3  
-OPT:recip=on -CG:local\_sched\_alg=1 -HP:bd=2m:heap=2m  
-WOPT:sib=on -march=bdver1

434.zeusmp: -fb\_create fbdata(pass 1) -fb\_opt fbdata(pass 2) -Ofast  
-LNO:blocking=off -LNO:interchange=off -IPA:plimit=1500  
-HP:bd=2m:heap=2m -march=bdver1

437.leslie3d: -Ofast -CG:pre\_minreg\_level=2 -LNO:simd=0 -LNO:fusion=2  
-HP:bd=2m:heap=2m -mso -march=bdver1

459.GemsFDTD: -Ofast -IPA:plimit=1500 -OPT:unroll\_size=1024  
-OPT:unroll\_times\_max=16 -LNO:fission=2  
-CG:local\_sched\_alg=2 -HP -march=bdver1

465.tonto: -Ofast -OPT:alias=no\_f90\_pointer\_alias -LNO:blocking=off  
-CG:load\_exe=1 -CG:local\_sched\_alg=3 -IPA:plimit=525  
-HP:bd=2m:heap=2m -march=bdver1

### Benchmarks using both Fortran and C:

435.gromacs: -Ofast -OPT:rsqrt=2 -HP:bd=2m:heap=2m  
-CG:local\_sched\_alg=2 -CG:load\_exe=3 -GRA:unspill=on  
-march=bdver1 -LNO:simd=3

436.cactusADM: -fb\_create fbdata(pass 1) -fb\_opt fbdata(pass 2) -Ofast  
-LNO:blocking=off -LNO:prefetch=2 -LNO:pf2=0  
-LNO:prefetch\_ahead=4 -HP -CG:locs\_shallow\_depth=1  
-CG:load\_exe=0 -CG:dsched=on -WOPT:sib=on -march=bdver1

454.calculix: -Ofast -OPT:unroll\_size=256 -OPT:alias=disjoint  
-GRA:optimize\_boundary=on -CG:dsched=on -HP:bd=2m:heap=2m  
-march=bdver1

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

Supermicro Processor Blade SBA-7222G-T2, (BHDGT,  
Opteron 6378)  
AMD Opteron 6378

SPECfp\_rate2006 = 285

SPECfp\_rate\_base2006 = 261

**CPU2006 license:** 001176

**Test sponsor:** Supermicro

**Tested by:** Supermicro

**Test date:** Oct-2012

**Hardware Availability:** Nov-2012

**Software Availability:** Aug-2012

## Peak Optimization Flags (Continued)

```
481.wrf: -Ofast -LNO:blocking=off -LANG:copyinout=off
         -IPA:callee_limit=5000 -GRA:prioritize_by_density=on -HP
         -WOPT:sib=on -march=bdver1
```

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/x86-open64-452-flags-rate-revA-I.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/x86-open64-452-flags-rate-revA-I.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Thu Jul 24 14:28:23 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 2 January 2013.