



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

Supermicro A+ Server 4042G-6RF (H8QG6-F, Opteron 6386 SE)
AMD Opteron 6386 SE

SPECint®_rate2006 = 1230

SPECint_rate_base2006 = 1070

CPU2006 license: 001176


Test sponsor: Supermicro

Tested by: Supermicro

Test date: Oct-2012

Hardware Availability: Nov-2012

Software Availability: Aug-2012

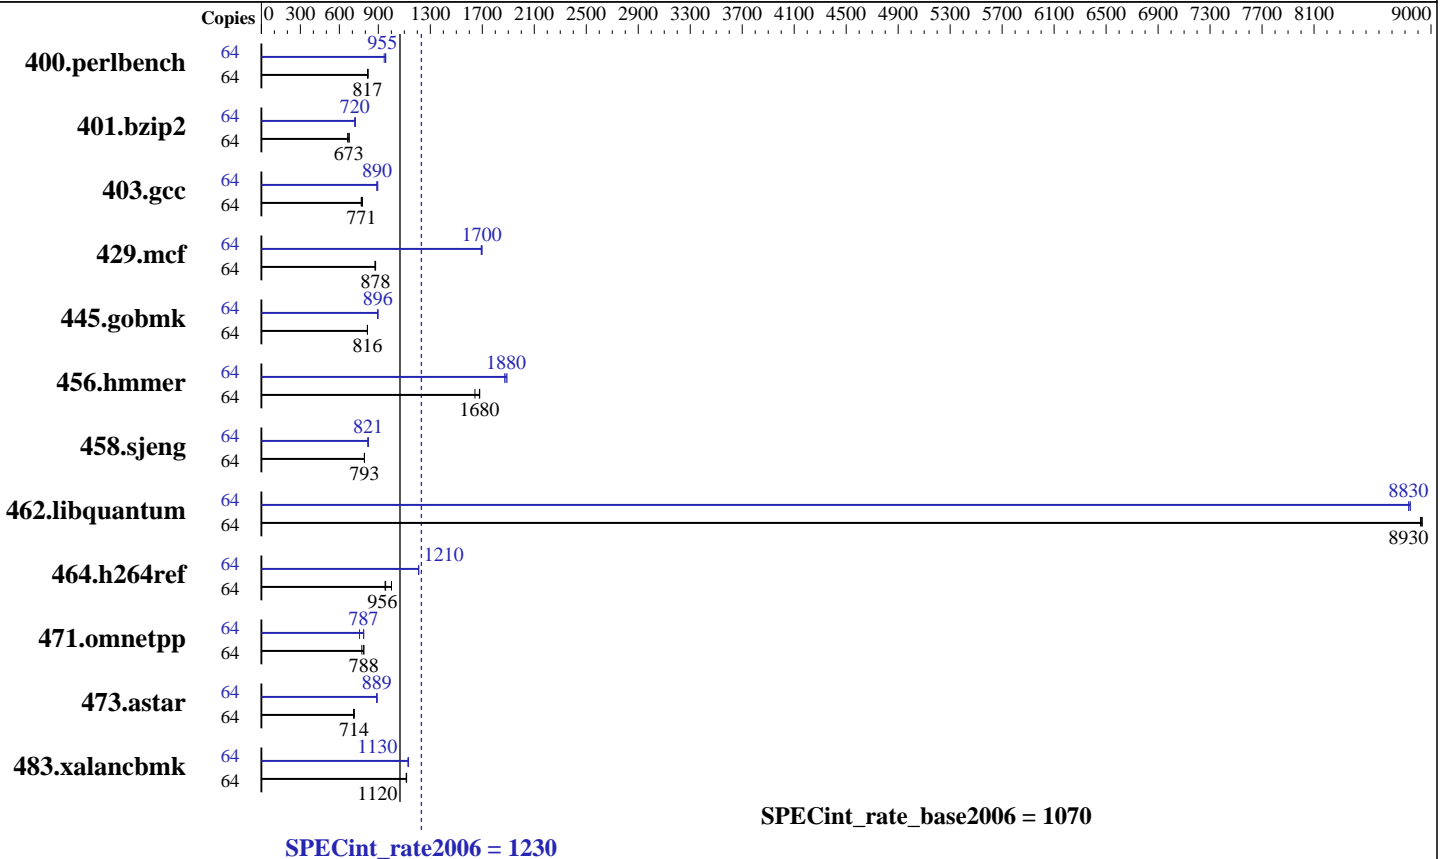

Hardware

CPU Name: AMD Opteron 6386 SE
 CPU Characteristics: AMD Turbo CORE technology up to 3.50 GHz
 CPU MHz: 2800
 FPU: Integrated
 CPU(s) enabled: 64 cores, 4 chips, 16 cores/chip
 CPU(s) orderable: 2,4 chips
 Primary Cache: 512 KB I on chip per chip,
 64 KB I shared / 2 cores;
 16 KB D on chip per core
 Secondary Cache: 16 MB I+D on chip per chip, 2 MB shared / 2 cores
 L3 Cache: 16 MB I+D on chip per chip, 8 MB shared / 8 cores
 Other Cache: None
 Memory: 256 GB (32 x 8 GB 2Rx4 PC3-12800R-11, ECC)
 Disk Subsystem: 1 x 500 GB SATA, 7200 RPM
 Other Hardware: None

Software

Operating System: Red Hat Enterprise Linux Server release 6.2,
 Kernel 2.6.32-220.el6.x86_64
 Compiler: C/C++: Version 4.5.2 of x86 Open64 Compiler Suite
 (from AMD)
 Auto Parallel: No
 File System: ext3
 System State: Run level 3 (Full multiuser with network)
 Base Pointers: 32/64-bit
 Peak Pointers: 32/64-bit
 Other Software: SmartHeap 10.0 32-bit Library for Linux



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

Supermicro A+ Server 4042G-6RF (H8QG6-F, Opteron 6386 SE)
AMD Opteron 6386 SE

SPECint_rate2006 = 1230

SPECint_rate_base2006 = 1070

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: Oct-2012

Hardware Availability: Nov-2012

Software Availability: Aug-2012

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	64	761	822	766	817	765	817	64	662	945	655	955	653	957
401.bzip2	64	918	673	931	664	913	676	64	854	723	859	719	858	720
403.gcc	64	668	771	662	778	671	768	64	579	889	575	896	579	890
429.mcf	64	668	874	665	878	664	879	64	344	1700	345	1690	344	1700
445.gobmk	64	822	816	823	816	822	816	64	749	896	750	895	749	896
456.hammer	64	363	1640	356	1680	355	1680	64	317	1880	319	1870	316	1890
458.sjeng	64	977	793	976	793	977	793	64	944	821	945	819	940	824
462.libquantum	64	149	8920	149	8930	148	8930	64	150	8830	150	8840	150	8830
464.h264ref	64	1415	1000	1488	952	1482	956	64	1170	1210	1171	1210	1171	1210
471.omnetpp	64	508	788	517	773	507	788	64	508	787	508	787	530	755
473.astar	64	634	709	629	714	629	714	64	505	889	505	890	507	887
483.xalancbmk	64	395	1120	395	1120	396	1110	64	390	1130	391	1130	391	1130

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size
'ulimit -l 2097152' was used to set environment locked pages in memory limit

Set transparent_hugepage=never as a boot parameter in /boot/grub/menu.lst

Set vm/nr_hugepages=57344 in /etc/sysctl.conf
mount -t hugetlbfs nodev /mnt/hugepages

General Notes

Environment variables set by runspec before the start of the run:

HUGETLB_LIMIT = "896"

LD_LIBRARY_PATH = "/home/spec/amd1206-rate-libs-revA/32:/home/spec/amd1206-rate-libs-revA/64"

The x86 Open64 Compiler Suite is only available from (and supported by) AMD at
<http://developer.amd.com/cpu/open64>

Binaries were compiled on a system with 2x AMD Opteron 6386SE chips + 128GB Memory using RHEL 6.3



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

Supermicro A+ Server 4042G-6RF (H8QG6-F, Opteron 6386 SE)
AMD Opteron 6386 SE

SPECint_rate2006 = 1230

SPECint_rate_base2006 = 1070

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: Oct-2012

Hardware Availability: Nov-2012

Software Availability: Aug-2012

Base Compiler Invocation

C benchmarks:
opencc

C++ benchmarks:
openCC

Base Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
403.gcc: -DSPEC_CPU_LP64
429.mcf: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:
-Ofast -CG:local_sched_alg=1 -INLINE:aggressive=ON -IPA:plimit=8000
-IPA:small_pu=100 -HP:bd=2m:heap=2m -mso -LNO:prefetch=2
-march=bdver1

C++ benchmarks:
-Ofast -m32 -INLINE:aggressive=on -CG:cmp_peep=on -D__OPEN64_FAST_SET
-march=bdver1 -L/root/work/libraries/SmartHeap-10/lib -lsmarheap

Peak Compiler Invocation

C benchmarks:
opencc

C++ benchmarks:
openCC

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

Supermicro A+ Server 4042G-6RF (H8QG6-F, Opteron 6386 SE)
AMD Opteron 6386 SE

SPECint_rate2006 = 1230

SPECint_rate_base2006 = 1070

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: Oct-2012

Hardware Availability: Nov-2012

Software Availability: Aug-2012

Peak Portability Flags (Continued)

401.bzip2: -DSPEC_CPU_LP64
 445.gobmk: -DSPEC_CPU_LP64
 456.hmmer: -DSPEC_CPU_LP64
 458.sjeng: -DSPEC_CPU_LP64
 462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
 464.h264ref: -DSPEC_CPU_LP64
 473.astar: -DSPEC_CPU_LP64
 483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -Ofast
 -LNO:prefetch=2 -LNO:opt=0 -IPA:plimit=20000
 -OPT:unroll_times_max=8 -OPT:unroll_size=256
 -OPT:unroll_level=2 -OPT:keep_ext=on -WOPT:if_conv=0
 -WOPT:sib=on -CG:local_sched_alg=1 -CG:unroll_fb_req=on
 -CG:movext_icmp=off -HP:bd=2m:heap=2m -march=bdver1
 -GRA:aggr_loop_splitting=off -GRA:loop_splitting=off

401.bzip2: -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -O3
 -LNO:prefetch=2 -LNO:pf2=0 -OPT:alias=disjoint
 -OPT:goto=off -CG:local_sched_alg=1 -HP:bdt=2m:heap=2m
 -march=bdver2

403.gcc: -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -Ofast
 -LNO:trip_count=256 -CG:cmp_peep=on -CG:pre_minreg_level=2
 -m32 -HP:bdt=2m:heap=2m -GRA:unspill=on -IPA:small_pu=200
 -WOPT:sib=on -march=bdver2 -mno-fma4

429.mcf: -O3 -OPT:unroll_times_max=5 -ipa -INLINE:aggressive=on
 -CG:gcm=off -CG:dsched=on -GRA:prioritize_by_density=on
 -m32 -HP:bdt=2m:heap=2m -mso -march=bdver1

445.gobmk: -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -Ofast
 -OPT:unroll_size=256 -OPT:unroll_times_max=8
 -OPT:keep_ext=on -IPA:plimit=750 -IPA:min_hotness=300
 -IPA:pu_reorder=1 -LNO:ignore_feedback=off -WOPT:if_conv=2
 -HP:bd=2m:heap=2m -march=bdver1

456.hmmer: -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -Ofast
 -LNO:prefetch=2 -OPT:alias=disjoint
 -OPT:unroll_times_max=16 -OPT:unroll_size=512
 -OPT:unroll_level=2 -OPT:keep_ext=on -CG:cflow=0
 -CG:cmp_peep=on -CG:pre_local_sched=off -HP:bdt=2m:heap=2m
 -CG:p2align=0 -CG:load_exe=3 -CG:dsched=on -march=bdver1

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

Supermicro A+ Server 4042G-6RF (H8QG6-F, Opteron 6386 SE)
AMD Opteron 6386 SE

SPECint_rate2006 = 1230

SPECint_rate_base2006 = 1070

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: Oct-2012

Hardware Availability: Nov-2012

Software Availability: Aug-2012

Peak Optimization Flags (Continued)

458.sjeng: -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -Ofast
-CG:ptr_load_use=0 -CG:divrem_opt=on -CG:movext_icmp=off
-CG:locs_best=on -LNO:full_unroll=10 -IPA:pu_reorder=2
-HP:heap=2m:bd=2m -WOPT:sib=on -march=bdver1

462.libquantum: -Ofast -mso -OPT:unroll_size=512 -OPT:unroll_times_max=16
-LNO:prefetch=2 -LNO:prefetch_ahead=4 -LNO:pf2=0
-CG:local_sched_alg=1 -CG:p2align=0 -INLINE:aggressive=ON
-IPA:plimit=15000 -IPA:small_pu=100
-HP:bd=2m:heap=2m,limit=300 -march=bdver2

464.h264ref: -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -O3
-OPT:unroll_size=256 -OPT:unroll_times_max=2
-IPA:plimit=20000 -OPT:alias=disjoint -CG:ptr_load_use=0
-CG:local_sched_alg=1 -HP:bd=2m:heap=2m -march=bdver1

C++ benchmarks:

471.omnetpp: -Ofast -m32 -INLINE:aggressive=on -CG:cmp_peep=on
-WOPT:sib=on -D__OPEN64_FAST_SET -march=bdver2 -mno-fma4
-L/root/work/libraries/SmartHeap-10/lib -lsmarheap

473.astar: -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -Ofast
-WOPT:if_conv=0 -WOPT:sib=on -CG:divrem_opt=on
-CG:p2align=1 -CG:dsched=on -GRA:optimize_boundary=on
-OPT:alias=disjoint -INLINE:aggressive=on
-IPA:small_pu=3000 -IPA:plimit=3000 -HP:bd=2m:heap=2m
-march=bdver1

483.xalancbmk: -Ofast -LNO:prefetch=2 -OPT:unroll_size=512
-OPT:unroll_times_max=8 -D__OPEN64_FAST_SET
-INLINE:aggressive=on -m32 -CG:cmp_peep=on
-CG:local_sched=off -CG:p2align=1 -GRA:unspill=on
-TENV:frame_pointer=off -fno-emit-exceptions -march=bdver2
-mno-fma4
-L/root/work/libraries/SmartHeap-10/lib -lsmarheap

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/x86-open64-452-flags-rate-revA-I.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/x86-open64-452-flags-rate-revA-I.xml>



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

Supermicro A+ Server 4042G-6RF (H8QG6-F, Opteron 6386 SE)
AMD Opteron 6386 SE

SPECint_rate2006 = 1230

SPECint_rate_base2006 = 1070

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: Oct-2012

Hardware Availability: Nov-2012

Software Availability: Aug-2012

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Thu Jul 24 14:41:40 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 2 January 2013.