



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

Supermicro A+ Server 4042G-6RF (H8QG6-F, Opteron 6378)
AMD Opteron 6378

SPECint®_rate2006 = 1090

SPECint_rate_base2006 = 946

CPU2006 license: 001176


Test sponsor: Supermicro

Tested by: Supermicro

Test date: Nov-2012

Hardware Availability: Nov-2012

Software Availability: Aug-2012

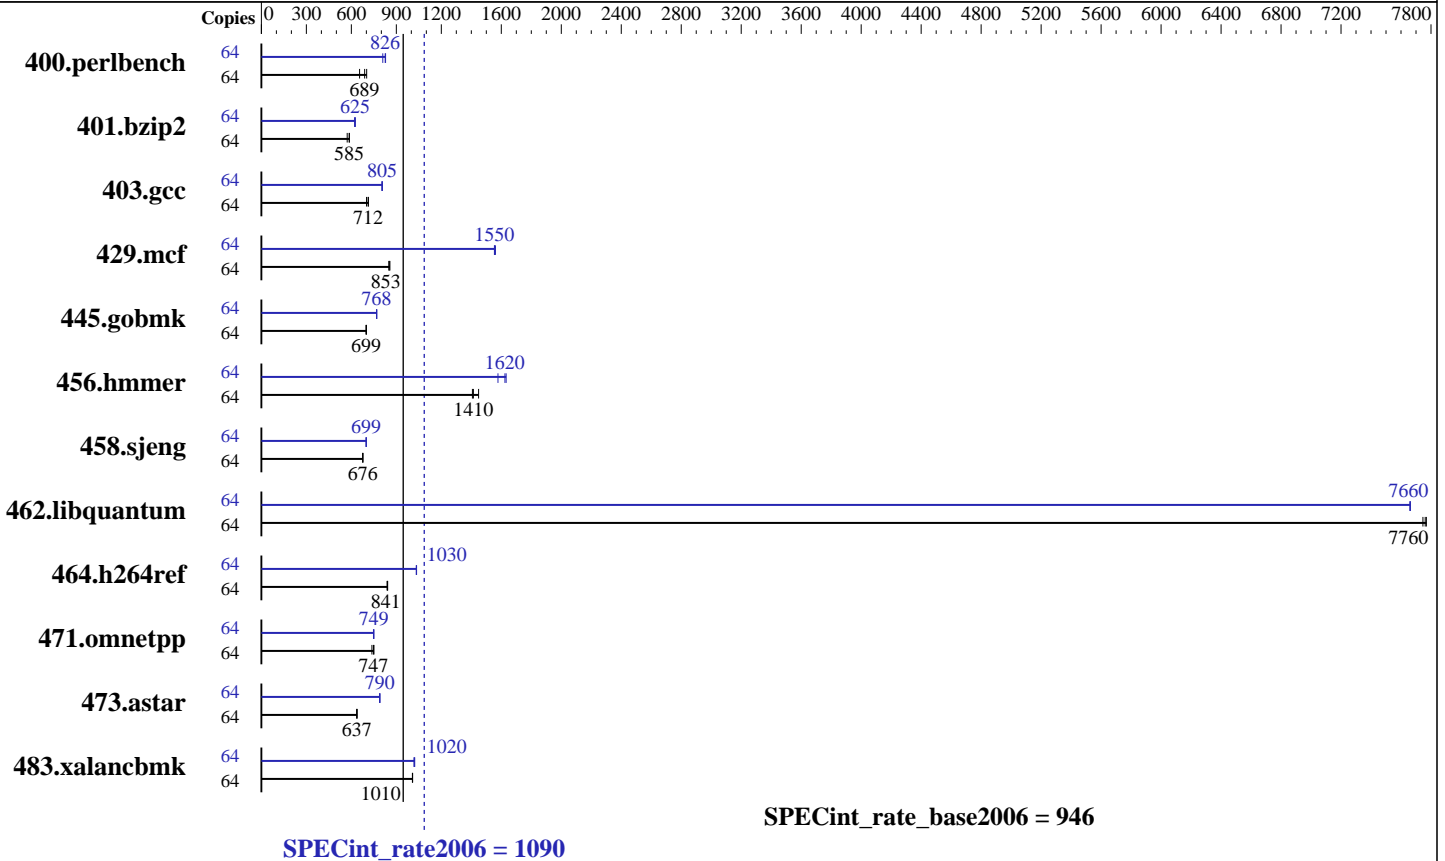

Hardware

CPU Name: AMD Opteron 6378
 CPU Characteristics: AMD Turbo CORE technology up to 3.30 GHz
 CPU MHz: 2400
 FPU: Integrated
 CPU(s) enabled: 64 cores, 4 chips, 16 cores/chip
 CPU(s) orderable: 2,4 chips
 Primary Cache: 512 KB I on chip per chip,
 64 KB I shared / 2 cores;
 16 KB D on chip per core
 Secondary Cache: 16 MB I+D on chip per chip, 2 MB shared / 2 cores
 L3 Cache: 16 MB I+D on chip per chip, 8 MB shared / 8 cores
 Other Cache: None
 Memory: 256 GB (32 x 8 GB 2Rx4 PC3-12800R-11, ECC)
 Disk Subsystem: 1 x 500 GB SATA, 7200 RPM
 Other Hardware: None

Software

Operating System: Red Hat Enterprise Linux Server release 6.2,
 Kernel 2.6.32-220.el6.x86_64
 Compiler: C/C++: Version 4.5.2 of x86 Open64 Compiler Suite
 (from AMD)
 Auto Parallel: No
 File System: ext3
 System State: Run level 3 (Full multiuser with network)
 Base Pointers: 32/64-bit
 Peak Pointers: 32/64-bit
 Other Software: SmartHeap 10.0 32-bit Library for Linux



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

Supermicro A+ Server 4042G-6RF (H8QG6-F, Opteron 6378)
AMD Opteron 6378

SPECint_rate2006 = 1090

SPECint_rate_base2006 = 946

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: Nov-2012

Hardware Availability: Nov-2012

Software Availability: Aug-2012

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	64	955	655	908	689	890	702	64	755	828	772	810	757	826
401.bzip2	64	1079	572	1052	587	1055	585	64	994	622	986	627	989	625
403.gcc	64	722	714	735	701	724	712	64	641	804	638	807	640	805
429.mcf	64	681	857	684	853	687	850	64	376	1550	375	1550	374	1560
445.gobmk	64	958	701	960	699	962	698	64	872	770	874	768	875	768
456.hammer	64	422	1410	412	1450	424	1410	64	368	1620	378	1580	366	1630
458.sjeng	64	1145	676	1145	677	1145	676	64	1107	700	1109	698	1108	699
462.libquantum	64	171	7770	171	7760	171	7750	64	173	7660	173	7660	173	7660
464.h264ref	64	1682	842	1690	838	1683	841	64	1370	1030	1368	1040	1370	1030
471.omnetpp	64	535	747	533	751	543	737	64	534	749	533	750	535	748
473.astar	64	705	637	704	638	707	636	64	570	788	568	790	569	790
483.xalancbmk	64	438	1010	438	1010	438	1010	64	434	1020	433	1020	432	1020

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size
'ulimit -l 2097152' was used to set environment locked pages in memory limit

Set transparent_hugepage=never as a boot parameter in /boot/grub/menu.lst

Set vm/nr_hugepages=57344 in /etc/sysctl.conf
mount -t hugetlbfs nodev /mnt/hugepages

General Notes

Environment variables set by runspec before the start of the run:

HUGETLB_LIMIT = "896"

LD_LIBRARY_PATH = "/home/spec/amd1206-rate-libs-revA/32:/home/spec/amd1206-rate-libs-revA/64"

The x86 Open64 Compiler Suite is only available from (and supported by) AMD at
<http://developer.amd.com/cpu/open64>

Binaries were compiled on a system with 2x AMD Opteron 6386SE chips + 128GB Memory using RHEL 6.3



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

Supermicro A+ Server 4042G-6RF (H8QG6-F, Opteron 6378)
AMD Opteron 6378

SPECint_rate2006 = 1090

SPECint_rate_base2006 = 946

CPU2006 license: 001176
Test sponsor: Supermicro
Tested by: Supermicro

Test date: Nov-2012
Hardware Availability: Nov-2012
Software Availability: Aug-2012

Base Compiler Invocation

C benchmarks:
opencc

C++ benchmarks:
openCC

Base Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
403.gcc: -DSPEC_CPU_LP64
429.mcf: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:
-Ofast -CG:local_sched_alg=1 -INLINE:aggressive=ON -IPA:plimit=8000
-IPA:small_pu=100 -HP:bd=2m:heap=2m -mso -LNO:prefetch=2
-march=bdver1

C++ benchmarks:
-Ofast -m32 -INLINE:aggressive=on -CG:cmp_peep=on -D__OPEN64_FAST_SET
-march=bdver1 -L/root/work/libraries/SmartHeap-10/lib -lsmartheap

Peak Compiler Invocation

C benchmarks:
opencc

C++ benchmarks:
openCC

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

Supermicro A+ Server 4042G-6RF (H8QG6-F, Opteron 6378)
AMD Opteron 6378

SPECint_rate2006 = 1090

SPECint_rate_base2006 = 946

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: Nov-2012

Hardware Availability: Nov-2012

Software Availability: Aug-2012

Peak Portability Flags (Continued)

401.bzip2: -DSPEC_CPU_LP64
 445.gobmk: -DSPEC_CPU_LP64
 456.hmmer: -DSPEC_CPU_LP64
 458.sjeng: -DSPEC_CPU_LP64
 462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
 464.h264ref: -DSPEC_CPU_LP64
 473.astar: -DSPEC_CPU_LP64
 483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -Ofast
 -LNO:prefetch=2 -LNO:opt=0 -IPA:plimit=20000
 -OPT:unroll_times_max=8 -OPT:unroll_size=256
 -OPT:unroll_level=2 -OPT:keep_ext=on -WOPT:if_conv=0
 -WOPT:sib=on -CG:local_sched_alg=1 -CG:unroll_fb_req=on
 -CG:movext_icmp=off -HP:bd=2m:heap=2m -march=bdver1
 -GRA:aggr_loop_splitting=off -GRA:loop_splitting=off

401.bzip2: -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -O3
 -LNO:prefetch=2 -LNO:pf2=0 -OPT:alias=disjoint
 -OPT:goto=off -CG:local_sched_alg=1 -HP:bdt=2m:heap=2m
 -march=bdver2

403.gcc: -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -Ofast
 -LNO:trip_count=256 -CG:cmp_peep=on -CG:pre_minreg_level=2
 -m32 -HP:bdt=2m:heap=2m -GRA:unspill=on -IPA:small_pu=200
 -WOPT:sib=on -march=bdver2 -mno-fma4

429.mcf: -O3 -OPT:unroll_times_max=5 -ipa -INLINE:aggressive=on
 -CG:gcm=off -CG:dsched=on -GRA:prioritize_by_density=on
 -m32 -HP:bdt=2m:heap=2m -mso -march=bdver1

445.gobmk: -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -Ofast
 -OPT:unroll_size=256 -OPT:unroll_times_max=8
 -OPT:keep_ext=on -IPA:plimit=750 -IPA:min_hotness=300
 -IPA:pu_reorder=1 -LNO:ignore_feedback=off -WOPT:if_conv=2
 -HP:bd=2m:heap=2m -march=bdver1

456.hmmer: -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -Ofast
 -LNO:prefetch=2 -OPT:alias=disjoint
 -OPT:unroll_times_max=16 -OPT:unroll_size=512
 -OPT:unroll_level=2 -OPT:keep_ext=on -CG:cflow=0
 -CG:cmp_peep=on -CG:pre_local_sched=off -HP:bdt=2m:heap=2m
 -CG:p2align=0 -CG:load_exe=3 -CG:dsched=on -march=bdver1

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

Supermicro A+ Server 4042G-6RF (H8QG6-F, Opteron 6378)
AMD Opteron 6378

SPECint_rate2006 = 1090

SPECint_rate_base2006 = 946

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: Nov-2012

Hardware Availability: Nov-2012

Software Availability: Aug-2012

Peak Optimization Flags (Continued)

458.sjeng: -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -Ofast
-CG:ptr_load_use=0 -CG:divrem_opt=on -CG:movext_icmp=off
-CG:locs_best=on -LNO:full_unroll=10 -IPA:pu_reorder=2
-HP:heap=2m:bd=2m -WOPT:sib=on -march=bdver1

462.libquantum: -Ofast -mso -OPT:unroll_size=512 -OPT:unroll_times_max=16
-LNO:prefetch=2 -LNO:prefetch_ahead=4 -LNO:pf2=0
-CG:local_sched_alg=1 -CG:p2align=0 -INLINE:aggressive=ON
-IPA:plimit=15000 -IPA:small_pu=100
-HP:bd=2m:heap=2m,limit=300 -march=bdver2

464.h264ref: -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -O3
-OPT:unroll_size=256 -OPT:unroll_times_max=2
-IPA:plimit=20000 -OPT:alias=disjoint -CG:ptr_load_use=0
-CG:local_sched_alg=1 -HP:bd=2m:heap=2m -march=bdver1

C++ benchmarks:

471.omnetpp: -Ofast -m32 -INLINE:aggressive=on -CG:cmp_peep=on
-WOPT:sib=on -D__OPEN64_FAST_SET -march=bdver2 -mno-fma4
-L/root/work/libraries/SmartHeap-10/lib -lsmarheap

473.astar: -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -Ofast
-WOPT:if_conv=0 -WOPT:sib=on -CG:divrem_opt=on
-CG:p2align=1 -CG:dsched=on -GRA:optimize_boundary=on
-OPT:alias=disjoint -INLINE:aggressive=on
-IPA:small_pu=3000 -IPA:plimit=3000 -HP:bd=2m:heap=2m
-march=bdver1

483.xalancbmk: -Ofast -LNO:prefetch=2 -OPT:unroll_size=512
-OPT:unroll_times_max=8 -D__OPEN64_FAST_SET
-INLINE:aggressive=on -m32 -CG:cmp_peep=on
-CG:local_sched=off -CG:p2align=1 -GRA:unspill=on
-TENV:frame_pointer=off -fno-emit-exceptions -march=bdver2
-mno-fma4
-L/root/work/libraries/SmartHeap-10/lib -lsmarheap

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/x86-open64-452-flags-rate-revA-I.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/x86-open64-452-flags-rate-revA-I.xml>



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

Supermicro A+ Server 4042G-6RF (H8QG6-F, Opteron 6378)
AMD Opteron 6378

SPECint_rate2006 = 1090

SPECint_rate_base2006 = 946

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: Nov-2012

Hardware Availability: Nov-2012

Software Availability: Aug-2012

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Thu Jul 24 14:30:07 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 2 January 2013.