



SPEC[®] CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp[®]_rate2006 = 231

PowerEdge R515 (AMD Opteron 4386, 3.10 GHz)

SPECfp_rate_base2006 = 206

CPU2006 license: 55


Test date: Oct-2012

Test sponsor: Dell Inc.

Hardware Availability: Nov-2012

Tested by: Dell Inc.

Software Availability: Aug-2012

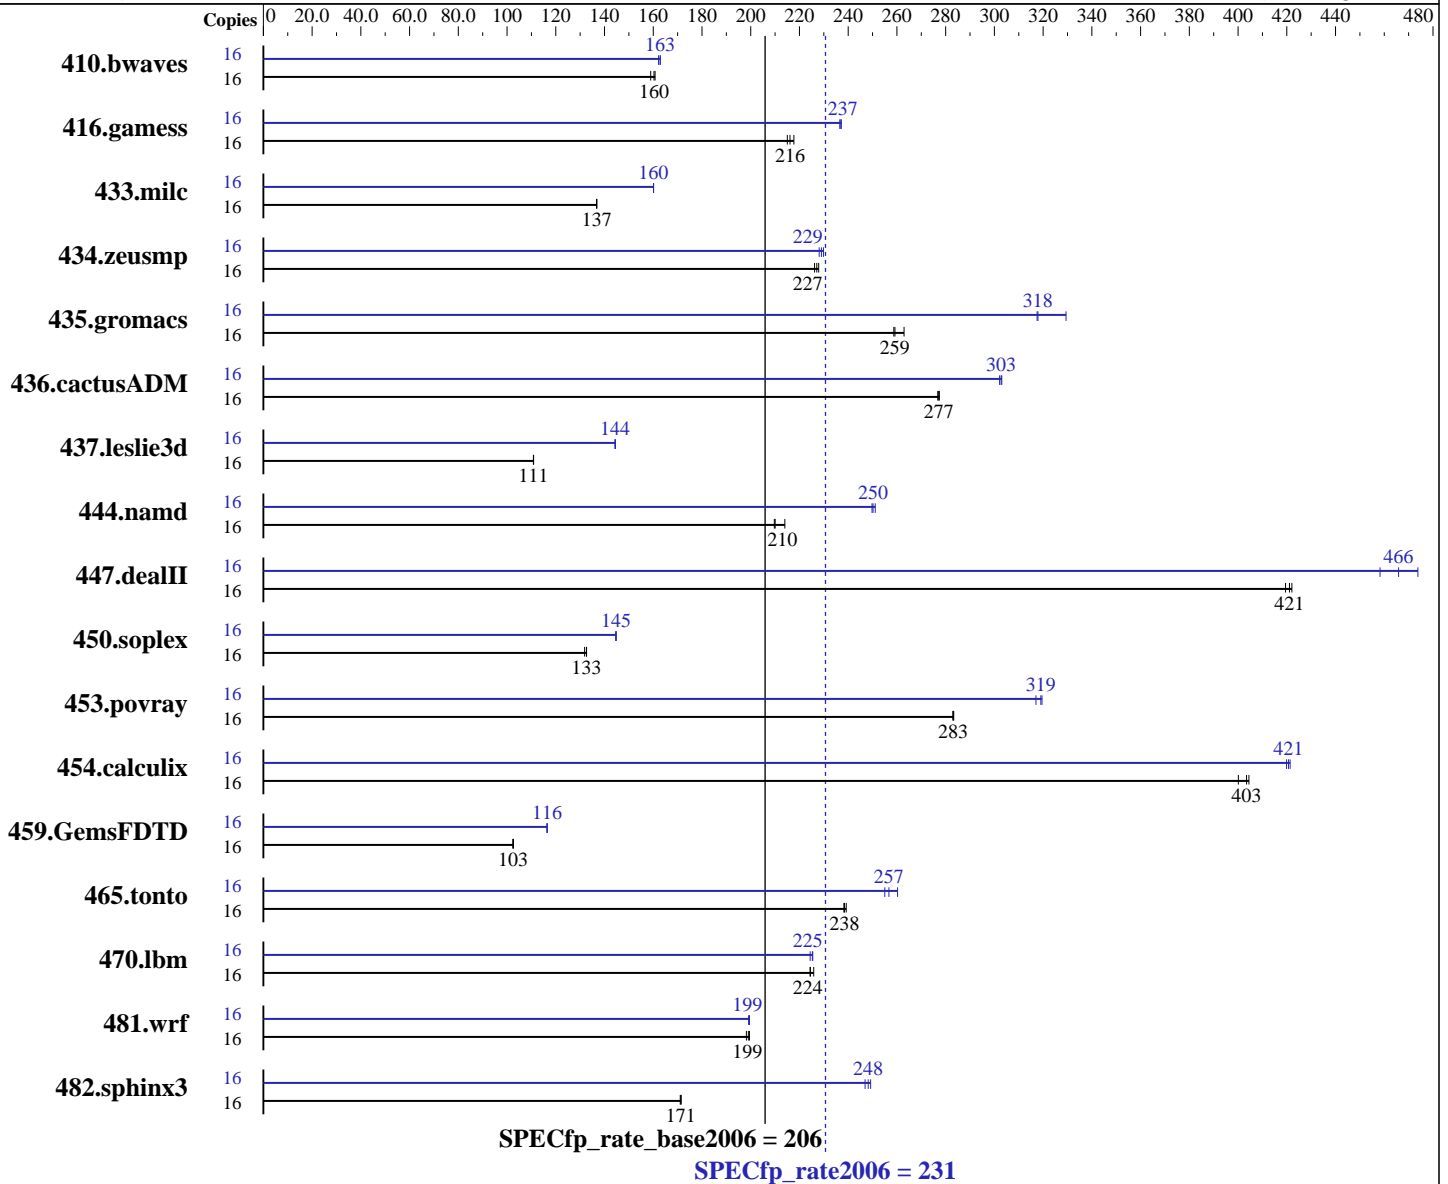

Hardware

CPU Name: AMD Opteron 4386
 CPU Characteristics: AMD Turbo CORE technology up to 3.80 GHz
 CPU MHz: 3100
 FPU: Integrated
 CPU(s) enabled: 16 cores, 2 chips, 8 cores/chip
 CPU(s) orderable: 1,2 chips

Continued on next page

Software

Operating System: Red Hat Enterprise Linux Server release 6.2, Kernel 2.6.32-220.el6.x86_64
 Compiler: C/C++/Fortran: Version 4.5.2 of x86 Open64 Compiler Suite (from AMD)
 Auto Parallel: No
 File System: ext3
 System State: Run level 3 (Full multiuser with network)
 Base Pointers: 64-bit
 Peak Pointers: 32/64-bit

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp_rate2006 = 231

PowerEdge R515 (AMD Opteron 4386, 3.10 GHz)

SPECfp_rate_base2006 = 206

CPU2006 license: 55

Test date: Oct-2012

Test sponsor: Dell Inc.

Hardware Availability: Nov-2012

Tested by: Dell Inc.

Software Availability: Aug-2012

Primary Cache: 256 KB I on chip per chip,
64 KB I shared / 2 cores;
16 KB D on chip per core

Secondary Cache: 8 MB I+D on chip per chip, 2 MB shared / 2 cores

L3 Cache: 8 MB I+D on chip per chip

Other Cache: None

Memory: 32 GB (4 x 8 GB 2Rx4 PC3-12800R-11, ECC)

Disk Subsystem: 1 x 1 TB 7200 RPM SATA

Other Hardware: None

Other Software: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	16	1353	161	<u>1356</u>	<u>160</u>	1368	159	16	1341	162	1335	163	<u>1335</u>	<u>163</u>
416.gamess	16	1439	218	<u>1450</u>	<u>216</u>	1457	215	16	1321	237	<u>1322</u>	<u>237</u>	1324	237
433.milc	16	1074	137	<u>1074</u>	<u>137</u>	1074	137	16	<u>917</u>	<u>160</u>	917	160	917	160
434.zeusmp	16	<u>641</u>	<u>227</u>	639	228	644	226	16	638	228	<u>636</u>	<u>229</u>	633	230
435.gromacs	16	434	263	<u>441</u>	<u>259</u>	442	259	16	<u>359</u>	<u>318</u>	347	329	360	318
436.cactusADM	16	<u>690</u>	<u>277</u>	689	277	691	277	16	633	302	631	303	<u>632</u>	<u>303</u>
437.leslie3d	16	<u>1357</u>	<u>111</u>	1356	111	1357	111	16	1042	144	1041	144	<u>1042</u>	<u>144</u>
444.namd	16	<u>611</u>	<u>210</u>	612	210	600	214	16	514	250	511	251	<u>513</u>	<u>250</u>
447.dealII	16	<u>435</u>	<u>421</u>	436	419	434	422	16	<u>393</u>	<u>466</u>	386	474	399	458
450.soplex	16	1012	132	<u>1007</u>	<u>133</u>	1006	133	16	923	145	<u>922</u>	<u>145</u>	922	145
453.povray	16	300	283	<u>301</u>	<u>283</u>	301	283	16	266	320	268	317	<u>267</u>	<u>319</u>
454.calculix	16	<u>327</u>	<u>403</u>	326	404	330	400	16	314	420	313	421	<u>314</u>	<u>421</u>
459.GemsFDTD	16	<u>1655</u>	<u>103</u>	1658	102	1654	103	16	<u>1458</u>	<u>116</u>	1458	116	1458	116
465.tonto	16	658	239	661	238	<u>660</u>	<u>238</u>	16	617	255	<u>613</u>	<u>257</u>	605	260
470.lbm	16	973	226	<u>979</u>	<u>224</u>	980	224	16	<u>976</u>	<u>225</u>	975	225	980	224
481.wrf	16	896	199	<u>898</u>	<u>199</u>	902	198	16	896	199	<u>897</u>	<u>199</u>	897	199
482.sphinx3	16	<u>1820</u>	<u>171</u>	1819	171	1823	171	16	1251	249	1263	247	<u>1256</u>	<u>248</u>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size
'ulimit -l 2097152' was used to set environment locked pages in memory limit

Transparent huge pages were enabled for this run (OS default)

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp_rate2006 = 231

PowerEdge R515 (AMD Opteron 4386, 3.10 GHz)

SPECfp_rate_base2006 = 206

CPU2006 license: 55

Test date: Oct-2012

Test sponsor: Dell Inc.

Hardware Availability: Nov-2012

Tested by: Dell Inc.

Software Availability: Aug-2012

Operating System Notes (Continued)

Huge pages were not configured for this run.

General Notes

Environment variables set by runspec before the start of the run:

LD_LIBRARY_PATH = "/root/cpu2006-1.2/amd1206-rate-libs-revA/32:/root/cpu2006-1.2/amd1206-rate-libs-revA/64"

The x86 Open64 Compiler Suite is only available from (and supported by) AMD at <http://developer.amd.com/cpu/open64>

Binaries were compiled on a system with 2x AMD Opteron 6386SE chips + 128GB Memory using RHEL 6.3

Base Compiler Invocation

C benchmarks:
openc

C++ benchmarks:
openCC

Fortran benchmarks:
openf95

Benchmarks using both Fortran and C:
openc openf95

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
 416.gamess: -DSPEC_CPU_LP64
 433.milc: -DSPEC_CPU_LP64
 434.zeusmp: -DSPEC_CPU_LP64
 435.gromacs: -DSPEC_CPU_LP64
 436.cactusADM: -DSPEC_CPU_LP64 -fno-second-underscore
 437.leslie3d: -DSPEC_CPU_LP64
 444.namd: -DSPEC_CPU_LP64
 447.dealII: -DSPEC_CPU_LP64
 450.soplex: -DSPEC_CPU_LP64
 453.povray: -DSPEC_CPU_LP64
 454.calculix: -DSPEC_CPU_LP64
 459.GemsFDTD: -DSPEC_CPU_LP64
 465.tonto: -DSPEC_CPU_LP64
 470.lbm: -DSPEC_CPU_LP64
 481.wrf: -DSPEC_CPU_LINUX -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LP64
 -fno-second-underscore

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp_rate2006 = 231

PowerEdge R515 (AMD Opteron 4386, 3.10 GHz)

SPECfp_rate_base2006 = 206

CPU2006 license: 55

Test date: Oct-2012

Test sponsor: Dell Inc.

Hardware Availability: Nov-2012

Tested by: Dell Inc.

Software Availability: Aug-2012

Base Portability Flags (Continued)

482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:

-Ofast -OPT:malloc_alg=1 -HP:bd=2m:heap=2m -IPA:plimit=8000
-IPA:small_pu=100 -mso -march=bdver1

C++ benchmarks:

-Ofast -static -CG:load_exe=0 -OPT:malloc_alg=1 -INLINE:aggressive=on
-HP:bd=2m:heap=2m -D__OPEN64_FAST_SET -march=bdver1

Fortran benchmarks:

-Ofast -LNO:blocking=off -LNO:simd_peel_align=on -OPT:rsqrt=2
-OPT:unroll_size=256 -HP:bd=2m:heap=2m -mso -march=bdver1

Benchmarks using both Fortran and C:

-Ofast -OPT:malloc_alg=1 -HP:bd=2m:heap=2m -IPA:plimit=8000
-IPA:small_pu=100 -mso -march=bdver1 -LNO:blocking=off
-LNO:simd_peel_align=on -OPT:rsqrt=2 -OPT:unroll_size=256

Peak Compiler Invocation

C benchmarks:

opencc

C++ benchmarks:

openCC

Fortran benchmarks:

openf95

Benchmarks using both Fortran and C:

opencc openf95

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64
436.cactusADM: -DSPEC_CPU_LP64 -fno-second-underscore

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp_rate2006 = 231

PowerEdge R515 (AMD Opteron 4386, 3.10 GHz)

SPECfp_rate_base2006 = 206

CPU2006 license: 55

Test date: Oct-2012

Test sponsor: Dell Inc.

Hardware Availability: Nov-2012

Tested by: Dell Inc.

Software Availability: Aug-2012

Peak Portability Flags (Continued)

```

437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LINUX -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LP64
-fno-second-underscore

```

Peak Optimization Flags

C benchmarks:

```

433.milc: -Ofast -CG:movnti=1 -CG:locs_best=on -HP:bdt=2m:heap=2m
-IPA:plimit=7000 -IPA:callee_limit=1200
-OPT:struct_array_copy=2 -OPT:alias=field_sensitive -mso
-march=bdver1

470.lbm: -Ofast -CG:cmp_peep=on -OPT:keep_ext=on -HP:bdt=2m:heap=2m
-IPA:plimit=8000 -IPA:small_pu=100 -march=bdver1 -mso

482.sphinx3: -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -Ofast
-m32 -IPA:plimit=1000 -OPT:malloc_alg=2 -CG:cmp_peep=on
-CG:p2align=0 -CG:load_exe=1 -CG:dsched=on
-INLINE:aggressive=on -LNO:prefetch=2 -LNO:prefetch_ahead=4
-mso -march=bdver2

```

C++ benchmarks:

```

444.namd: -Ofast -IPA:plimit=3000 -LNO:ignore_feedback=off
-CG:local_sched_alg=0 -CG:load_exe=0 -OPT:unroll_size=256
-fno-exceptions -HP:bdt=2m:heap=2m -LNO:if_select_conv=1
-OPT:alias=disjoint -LNO:psimd_iso_unroll=ON -march=bdver1

447.dealIII: -Ofast -D__OPEN64_FAST_SET -static -INLINE:aggressive=on
-LNO:opt=1 -LNO:simd=2 -fno-emit-exceptions -m32
-OPT:unroll_times_max=8 -OPT:unroll_size=256
-OPT:unroll_level=2 -HP:bdt=2m:heap=2m -GRA:unspill=on
-CG:cmp_peep=on -CG:movext_icmp=off -TENV:frame_pointer=off
-march=bdver1

450.soplex: -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -O3
-LNO:ignore_feedback=off -INLINE:aggressive=on -OPT:RO=1
-OPT:IEEE_arith=3 -OPT:IEEE_NaN_Inf=off
-OPT:fold_unsigned_relops=on -fno-exceptions -CG:p2align=0
-m32 -mno-fma4 -HP:bdt=2m:heap=2m -WOPT:sib=on
-march=bdver1

```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp_rate2006 = 231

PowerEdge R515 (AMD Opteron 4386, 3.10 GHz)

SPECfp_rate_base2006 = 206

CPU2006 license: 55

Test date: Oct-2012

Test sponsor: Dell Inc.

Hardware Availability: Nov-2012

Tested by: Dell Inc.

Software Availability: Aug-2012

Peak Optimization Flags (Continued)

```
453.povray: -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -Ofast
-CG:pre_local_sched=off -CG:p2align=0 -CG:p2align_split=on
-CG:dsched=on -INLINE:aggressive=on -HP:bd=2m:heap=2m
-OPT:transform=2 -OPT:alias=disjoint -WOPT:aggcm=0
-march=bdver2
```

Fortran benchmarks:

```
410.bwaves: -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -Ofast
-OPT:Ofast -OPT:treeheight=on -LNO:blocking=off
-LNO:ignore_feedback=off -LNO:fu=4 -LNO:loop_model_simd=on
-LNO:simd_rm_unity_remainder=on -WOPT:aggstr=0
-HP:bd=2m:heap=2m -CG:cmp_peep=on -march=bdver1
```

```
416.gamess: -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -Ofast
-LNO:fu=6 -LNO:blocking=0 -LNO:simd=2 -OPT:ro=3
-OPT:recip=on -CG:local_sched_alg=1 -HP:bd=2m:heap=2m
-WOPT:sib=on -march=bdver1
```

```
434.zeusmp: -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -Ofast
-LNO:blocking=off -LNO:interchange=off -IPA:plimit=1500
-HP:bd=2m:heap=2m -march=bdver1
```

```
437.leslie3d: -Ofast -CG:pre_minreg_level=2 -LNO:simd=0 -LNO:fusion=2
-HP:bd=2m:heap=2m -mso -march=bdver1
```

```
459.GemsFDTD: -Ofast -IPA:plimit=1500 -OPT:unroll_size=1024
-OPT:unroll_times_max=16 -LNO:fission=2
-CG:local_sched_alg=2 -HP -march=bdver1
```

```
465.tonto: -Ofast -OPT:alias=no_f90_pointer_alias -LNO:blocking=off
-CG:load_exe=1 -CG:local_sched_alg=3 -IPA:plimit=525
-HP:bd=2m:heap=2m -march=bdver1
```

Benchmarks using both Fortran and C:

```
435.gromacs: -Ofast -OPT:rsqrt=2 -HP:bd=2m:heap=2m
-CG:local_sched_alg=2 -CG:load_exe=3 -GRA:unspill=on
-march=bdver1 -LNO:simd=3
```

```
436.cactusADM: -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -Ofast
-LNO:blocking=off -LNO:prefetch=2 -LNO:pf2=0
-LNO:prefetch_ahead=4 -HP -CG:locs_shallow_depth=1
-CG:load_exe=0 -CG:dsched=on -WOPT:sib=on -march=bdver1
```

```
454.calculix: -Ofast -OPT:unroll_size=256 -OPT:alias=disjoint
-GRA:optimize_boundary=on -CG:dsched=on -HP:bd=2m:heap=2m
-march=bdver1
```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp_rate2006 = 231

PowerEdge R515 (AMD Opteron 4386, 3.10 GHz)

SPECfp_rate_base2006 = 206

CPU2006 license: 55

Test date: Oct-2012

Test sponsor: Dell Inc.

Hardware Availability: Nov-2012

Tested by: Dell Inc.

Software Availability: Aug-2012

Peak Optimization Flags (Continued)

```
481.wrf: -Ofast -LNO:blocking=off -LANG:copyinout=off
         -IPA:callee_limit=5000 -GRA:prioritize_by_density=on -HP
         -WOPT:sib=on -march=bdver1
```

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/x86-open64-452-flags-rate-revA-II.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/x86-open64-452-flags-rate-revA-II.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Thu Jul 24 14:38:46 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 2 January 2013.