



SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Cisco Systems

SPECfp®2006 = 54.4

Cisco UCS B420 M3 (Intel Xeon E5-4607, 2.20 GHz)

SPECfp_base2006 = 52.4

CPU2006 license: 9019


Test sponsor: Cisco Systems

Tested by: Cisco Systems

Test date: Jan-2013

Hardware Availability: Nov-2012

Software Availability: Feb-2012

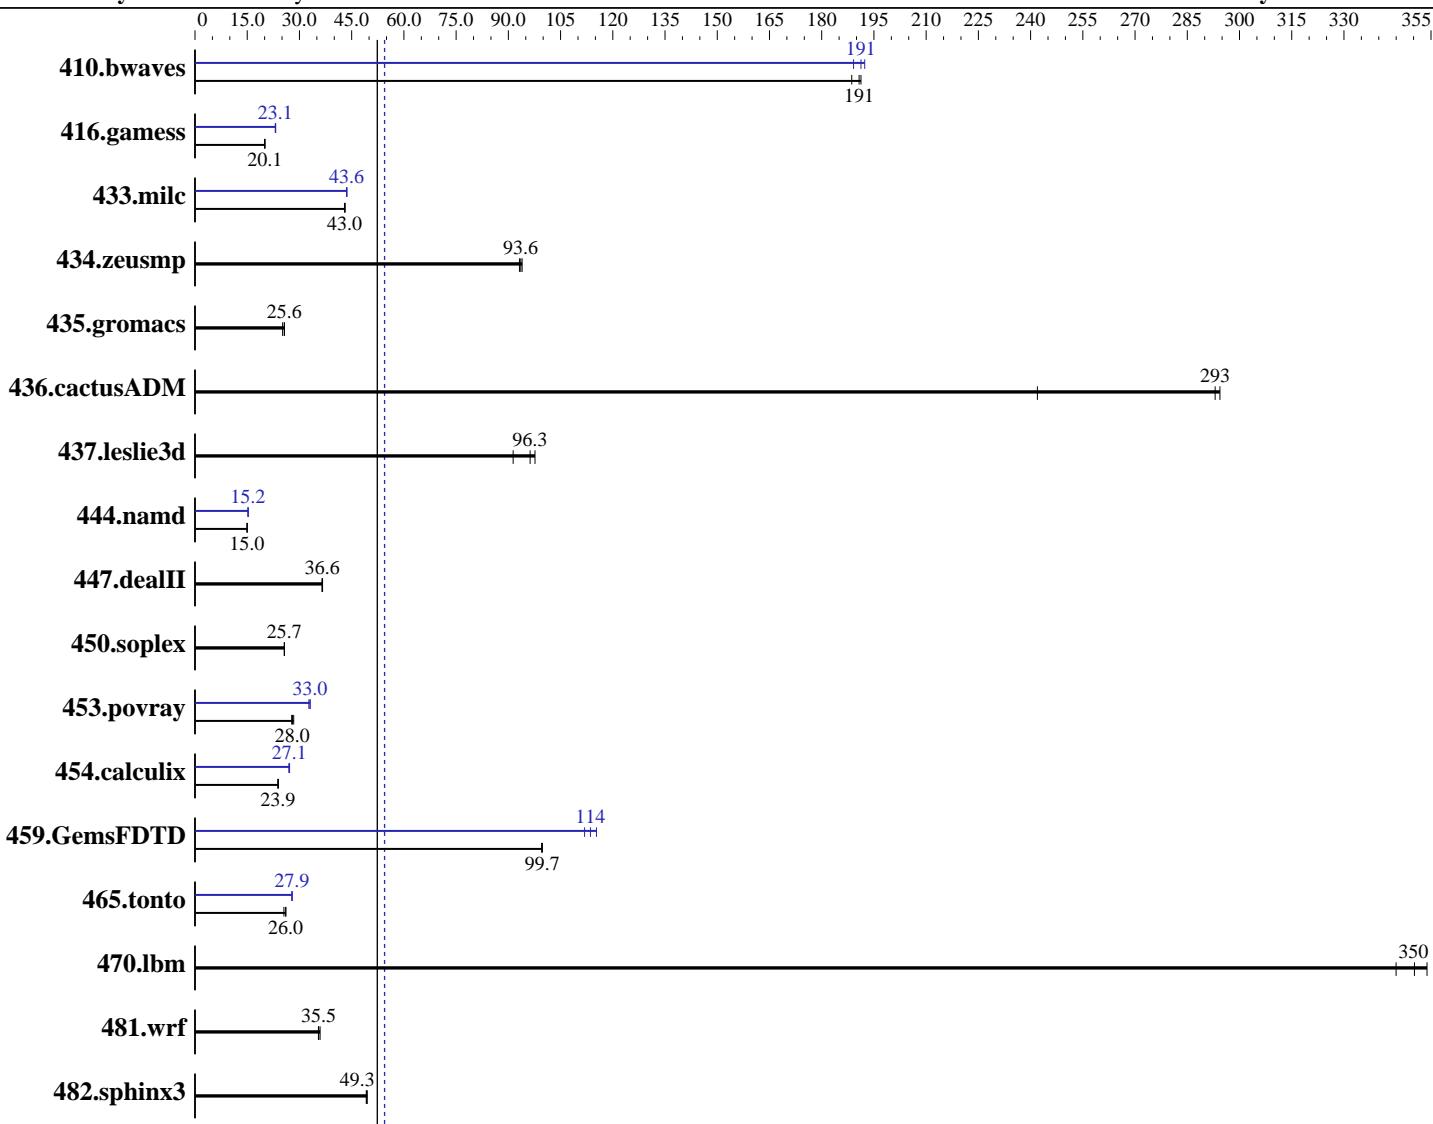

Hardware

CPU Name: Intel Xeon E5-4607
 CPU Characteristics:
 CPU MHz: 2200
 FPU: Integrated
 CPU(s) enabled: 24 cores, 4 chips, 6 cores/chip
 CPU(s) orderable: 2,4 chip
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Software

Operating System: Red Hat Enterprise Linux Server release 6.2 (Santiago)
 Compiler: 2.6.32-220.el6.x86_64
 Auto Parallel: C/C++: Version 12.1.3.293 of Intel C++ Studio XE for Linux;
 File System: Fortran: Version 12.1.3.293 of Intel Fortran Studio XE for Linux
 ext4

Continued on next page

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS B420 M3 (ntel Xeon E5-4607, 2.20 GHz)

SPECfp2006 = 54.4

CPU2006 license: 9019 **Test date:** Jan-2013
Test sponsor: Cisco Systems **Hardware Availability:** Nov-2012
Tested by: Cisco Systems **Software Availability:** Feb-2012

L3 Cache:	12 MB I+D on chip per chip	System State:	Run level 3 (multi-user)
Other Cache:	None	Base Pointers:	64-bit
Memory:	256 GB (32 x 8 GB 2Rx4 PC3-12800R-11, ECC, running at 1066 MHz and CL7)	Peak Pointers:	32/64-bit
Disk Subsystem:	1 X 300 GB 15000 RPM SAS	Other Software:	None
Other Hardware:	None		

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	72.0	189	71.0	191	<u>71.2</u>	<u>191</u>	70.6	192	71.8	189	<u>71.0</u>	<u>191</u>
416.gamess	980	20.0	<u>975</u>	<u>20.1</u>	974	20.1	845	23.2	849	23.1	<u>847</u>	<u>23.1</u>
433.milc	214	42.9	213	43.1	<u>213</u>	<u>43.0</u>	<u>211</u>	<u>43.6</u>	211	43.6	210	43.6
434.zeusmp	96.9	94.0	97.7	93.2	<u>97.3</u>	<u>93.6</u>	96.9	94.0	97.7	93.2	<u>97.3</u>	<u>93.6</u>
435.gromacs	284	25.2	278	25.7	<u>279</u>	<u>25.6</u>	284	25.2	278	25.7	<u>279</u>	<u>25.6</u>
436.cactusADM	49.4	242	<u>40.8</u>	<u>293</u>	40.6	294	49.4	242	<u>40.8</u>	<u>293</u>	40.6	294
437.leslie3d	103	91.4	96.3	97.7	<u>97.7</u>	<u>96.3</u>	103	91.4	96.3	97.7	<u>97.7</u>	<u>96.3</u>
444.namd	536	15.0	<u>536</u>	<u>15.0</u>	536	15.0	526	15.3	526	15.2	<u>526</u>	<u>15.2</u>
447.dealII	<u>312</u>	<u>36.6</u>	312	36.6	314	36.5	<u>312</u>	<u>36.6</u>	312	36.6	314	36.5
450.soplex	325	25.7	<u>325</u>	<u>25.7</u>	325	25.7	<u>325</u>	<u>25.7</u>	<u>325</u>	<u>25.7</u>	325	25.7
453.povray	188	28.4	192	27.8	<u>190</u>	<u>28.0</u>	161	33.1	<u>161</u>	<u>33.0</u>	163	32.7
454.calculix	347	23.8	345	23.9	<u>346</u>	<u>23.9</u>	304	27.2	306	27.0	<u>305</u>	<u>27.1</u>
459.GemsFDTD	107	99.6	106	99.7	<u>106</u>	<u>99.7</u>	92.0	115	94.8	112	<u>93.4</u>	<u>114</u>
465.tonto	385	25.5	377	26.1	<u>378</u>	<u>26.0</u>	353	27.9	353	27.8	<u>353</u>	<u>27.9</u>
470.lbm	38.8	354	<u>39.2</u>	<u>350</u>	39.8	345	38.8	354	<u>39.2</u>	<u>350</u>	39.8	345
481.wrf	<u>314</u>	<u>35.5</u>	315	35.5	311	35.9	<u>314</u>	<u>35.5</u>	315	35.5	311	35.9
482.sphinx3	<u>395</u>	<u>49.3</u>	394	49.5	396	49.2	<u>395</u>	<u>49.3</u>	394	49.5	396	49.2

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

BIOS Configuration:

Processor C6 Report set to Disabled

Processor C1E set to Disabled

CPU Performance set to HPC

LV DDR Mode set to Performance-mode

Sysinfo program /opt/cpu2006-1.2/config/sysinfo.rev6800

\$Rev: 6800 \$ \$Date::: 2011-10-11 ## 6f2ebdff5032aaa42e583f96b07f99d3
running on localhost.localdomain Mon Jan 7 23:18:46 2013

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS B420 M3 (ntel Xeon E5-4607, 2.20 GHz)

SPECfp2006 = 54.4

CPU2006 license: 9019

Test date: Jan-2013

Test sponsor: Cisco Systems

Hardware Availability: Nov-2012

Tested by: Cisco Systems

Software Availability: Feb-2012

Platform Notes (Continued)

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
    model name : Intel(R) Xeon(R) CPU E5-4607 0 @ 2.20GHz
        4 "physical id"s (chips)
        24 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
    cpu cores : 6
    siblings   : 6
    physical 0: cores 0 1 2 3 4 5
    physical 1: cores 0 1 2 3 4 5
    physical 2: cores 0 1 2 3 4 5
    physical 3: cores 0 1 2 3 4 5
cache size : 12288 KB
```

```
From /proc/meminfo
MemTotal:      264507508 kB
HugePages_Total:       0
Hugepagesize:     2048 kB
```

```
/usr/bin/lsb_release -d
Red Hat Enterprise Linux Server release 6.2 (Santiago)
```

```
From /etc/*release* /etc/*version*
redhat-release: Red Hat Enterprise Linux Server release 6.2 (Santiago)
system-release: Red Hat Enterprise Linux Server release 6.2 (Santiago)
system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server
```

```
uname -a:
Linux localhost.localdomain 2.6.32-220.el6.x86_64 #1 SMP Wed Nov 9 08:03:13
EST 2011 x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 Jan 7 23:10
```

```
SPEC is set to: /opt/cpu2006-1.2
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sdal      ext4  275G  9.9G  251G  4%  /
```

```
Additional information from dmidecode:
```

```
Memory:
32x 0xCE00 M393B1K70DH0-YK0 8 GB 1600 MHz 2 rank
```

```
(End of data from sysinfo program)
```



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Cisco Systems	SPECfp2006 =	54.4
Cisco UCS B420 M3 (ntel Xeon E5-4607, 2.20 GHz)	SPECfp_base2006 =	52.4
CPU2006 license: 9019	Test date:	Jan-2013
Test sponsor: Cisco Systems	Hardware Availability:	Nov-2012
Tested by: Cisco Systems	Software Availability:	Feb-2012

General Notes

Environment variables set by runspec before the start of the run:
KMP_AFFINITY = "granularity=fine,scatter"
LD_LIBRARY_PATH = "/opt/cpu2006-1.2/libs/32:/opt/cpu2006-1.2/libs/64"
OMP_NUM_THREADS = "24"
Intel HT Technology=disable
Binaries compiled on a system with 2 X Intel Xeon E5-2690 CPU + 128 GB memory using RHEL 6.2
Transparent Huge Pages enabled with:
echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled
Filesystem page cache cleared with:
echo 1> /proc/sys/vm/drop_caches

Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS B420 M3 (ntel Xeon E5-4607, 2.20 GHz)

SPECfp2006 = 54.4

CPU2006 license: 9019

Test date: Jan-2013

Test sponsor: Cisco Systems

Hardware Availability: Nov-2012

Tested by: Cisco Systems

Software Availability: Feb-2012

Base Optimization Flags

C benchmarks:

```
-xAVX -ipo -O3 -no-prec-div -static -parallel -opt-prefetch  
-ansi-alias
```

C++ benchmarks:

```
-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -ansi-alias
```

Fortran benchmarks:

```
-xAVX -ipo -O3 -no-prec-div -static -parallel -opt-prefetch
```

Benchmarks using both Fortran and C:

```
-xAVX -ipo -O3 -no-prec-div -static -parallel -opt-prefetch  
-ansi-alias
```

Peak Compiler Invocation

C benchmarks:

```
icc -m64
```

C++ benchmarks:

```
icpc -m64
```

Fortran benchmarks:

```
ifort -m64
```

Benchmarks using both Fortran and C:

```
icc -m64 ifort -m64
```

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

```
433.milc: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -static -auto-ilp32  
-ansi-alias
```

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS B420 M3 (ntel Xeon E5-4607, 2.20 GHz)

SPECfp2006 = 54.4

CPU2006 license: 9019

Test date: Jan-2013

Test sponsor: Cisco Systems

Hardware Availability: Nov-2012

Tested by: Cisco Systems

Software Availability: Feb-2012

Peak Optimization Flags (Continued)

C++ benchmarks:

```
444.namd: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
           -no-prec-div(pass 2) -prof-use(pass 2) -fno-alias
           -auto-ilp32

447.dealII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
             -no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -ansi-alias
```

Fortran benchmarks:

```
410.bwaves: -xAVX -ipo -O3 -no-prec-div -opt-prefetch -parallel
            -static

416.gamess: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
            -no-prec-div(pass 2) -prof-use(pass 2) -unroll2
            -inline-level=0 -scalar-rep -static

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
               -no-prec-div(pass 2) -prof-use(pass 2) -unroll2
               -inline-level=0 -opt-prefetch -parallel

465.tonto: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
            -no-prec-div(pass 2) -prof-use(pass 2) -inline-calloc
            -opt-malloc-options=3 -auto -unroll4
```

Benchmarks using both Fortran and C:

```
435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

454.calculix: -xAVX -ipo -O3 -no-prec-div -auto-ilp32 -ansi-alias

481.wrf: basepeak = yes
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20120425.html>
<http://www.spec.org/cpu2006/flags/Cisco-Platform-Settings-V1.2.20130607.html>



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Cisco Systems

SPECfp2006 = 54.4

Cisco UCS B420 M3 (ntel Xeon E5-4607, 2.20 GHz)

SPECfp_base2006 = 52.4

CPU2006 license: 9019

Test date: Jan-2013

Test sponsor: Cisco Systems

Hardware Availability: Nov-2012

Tested by: Cisco Systems

Software Availability: Feb-2012

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20120425.xml>

<http://www.spec.org/cpu2006/flags/Cisco-Platform-Settings-V1.2.20130607.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.

Report generated on Thu Jul 24 14:54:14 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 29 January 2013.