



SPEC[®] CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Cisco Systems

SPECfp[®]_rate2006 = 162

Cisco UCS C22 M3 (Intel Xeon E5-2430, 2.20 GHz)

SPECfp_rate_base2006 = 158

CPU2006 license: 9019


Test date: Jan-2013

Test sponsor: Cisco Systems

Hardware Availability: Sep-2012

Tested by: Cisco Systems

Software Availability: Feb-2012

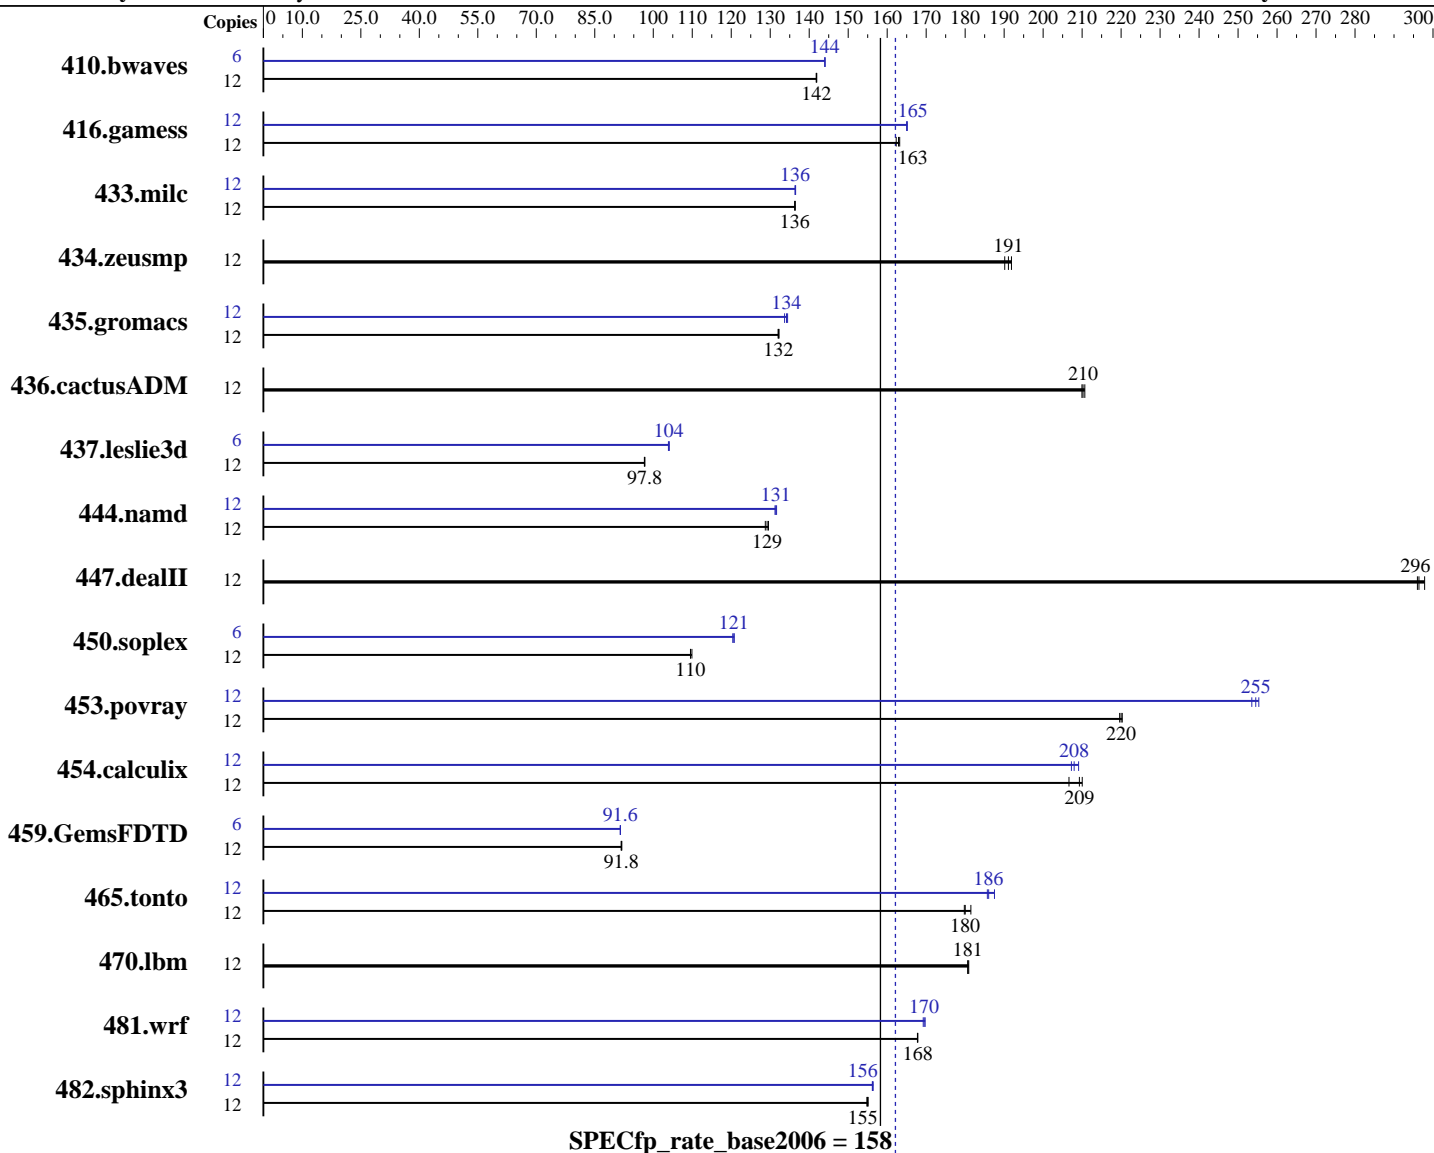

SPECfp_rate2006 = 162

Hardware

CPU Name: Intel Xeon E5-2430
 CPU Characteristics: Intel Turbo Boost Technology up to 2.70 GHz
 CPU MHz: 2200
 FPU: Integrated
 CPU(s) enabled: 6 cores, 1 chip, 6 cores/chip, 2 threads/core
 CPU(s) orderable: 1,2 chip
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

Software

Operating System: Red Hat Enterprise Linux Server release 6.2 (Santiago)
 2.6.32-220.el6.x86_64
 Compiler: C/C++: Version 12.1.3.293 of Intel C++ Studio XE for Linux;
 Fortran: Version 12.1.3.293 of Intel Fortran Studio XE for Linux
 Auto Parallel: No
 File System: ext4

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Cisco Systems

SPECfp_rate2006 = 162

Cisco UCS C22 M3 (Intel Xeon E5-2430, 2.20 GHz)

SPECfp_rate_base2006 = 158

CPU2006 license: 9019

Test date: Jan-2013

Test sponsor: Cisco Systems

Hardware Availability: Sep-2012

Tested by: Cisco Systems

Software Availability: Feb-2012

L3 Cache: 15 MB I+D on chip per chip
 Other Cache: None
 Memory: 48 GB (6 x 8 GB 2Rx4 PC3-12800R-11, ECC, running at 1333 MHz and CL9)
 Disk Subsystem: 1 X 146 GB 15000 RAPM SAS
 Other Hardware: None

System State: Run level 3 (multi-user)
 Base Pointers: 32/64-bit
 Peak Pointers: 32/64-bit
 Other Software: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	12	1150	142	1150	142	1149	142	6	566	144	566	144	566	144
416.gamess	12	1448	162	1440	163	1442	163	12	1423	165	1423	165	1424	165
433.milc	12	808	136	807	136	808	136	12	808	136	807	136	807	137
434.zeusmp	12	574	190	571	191	569	192	12	574	190	571	191	569	192
435.gromacs	12	648	132	649	132	648	132	12	641	134	637	134	639	134
436.cactusADM	12	682	210	683	210	681	211	12	682	210	683	210	681	211
437.leslie3d	12	1153	97.8	1153	97.8	1154	97.7	6	542	104	542	104	543	104
444.namd	12	748	129	743	130	745	129	12	732	131	731	132	733	131
447.dealII	12	461	298	463	296	464	296	12	461	298	463	296	464	296
450.soplex	12	911	110	914	110	914	110	6	415	121	414	121	416	120
453.povray	12	290	220	290	220	291	220	12	251	255	250	255	252	254
454.calculix	12	471	210	479	207	473	209	12	473	209	478	207	476	208
459.GemsFDTD	12	1387	91.8	1385	91.9	1387	91.8	6	695	91.6	695	91.6	695	91.6
465.tonto	12	657	180	651	181	656	180	12	636	186	630	188	635	186
470.lbm	12	913	181	912	181	911	181	12	913	181	912	181	911	181
481.wrf	12	799	168	799	168	799	168	12	792	169	791	170	790	170
482.sphinx3	12	1511	155	1509	155	1508	155	12	1497	156	1497	156	1495	156

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

Sysinfo program /opt/cpu2006-1.2/config/sysinfo.rev6800
 \$Rev: 6800 \$ \$Date:: 2011-10-11 # \$ 6f2ebdff5032aaa42e583f96b07f99d3
 running on localhost.localdomain Mon Jan 14 14:07:19 2013

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Cisco Systems

SPECfp_rate2006 = 162

Cisco UCS C22 M3 (Intel Xeon E5-2430, 2.20 GHz)

SPECfp_rate_base2006 = 158

CPU2006 license: 9019

Test sponsor: Cisco Systems

Tested by: Cisco Systems

Test date: Jan-2013

Hardware Availability: Sep-2012

Software Availability: Feb-2012

Platform Notes (Continued)

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see: <http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name : Intel(R) Xeon(R) CPU E5-2430 0 @ 2.20GHz
1 "physical id"s (chips)
12 "processors"
```

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

```
cpu cores : 6
siblings : 12
physical 0: cores 0 1 2 3 4 5
cache size : 15360 KB
```

From /proc/meminfo

```
MemTotal: 49402300 kB
HugePages_Total: 0
Hugepagesize: 2048 kB
```

/usr/bin/lsc_release -d

```
Red Hat Enterprise Linux Server release 6.2 (Santiago)
```

From /etc/*release* /etc/*version*

```
redhat-release: Red Hat Enterprise Linux Server release 6.2 (Santiago)
system-release: Red Hat Enterprise Linux Server release 6.2 (Santiago)
system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server
```

uname -a:

```
Linux localhost.localdomain 2.6.32-220.el6.x86_64 #1 SMP Wed Nov 9 08:03:13
EST 2011 x86_64 x86_64 x86_64 GNU/Linux
```

run-level 3 Jan 14 14:04

SPEC is set to: /opt/cpu2006-1.2

```
Filesystem Type Size Used Avail Use% Mounted on
/dev/sdal ext4 134G 25G 103G 20% /
```

Additional information from dmidecode:

```
Memory:
6x 0xCE00 M393B1K70DH0-YK0 8 GB 1600 MHz 2 rank
```

(End of data from sysinfo program)

General Notes

Environment variables set by runspec before the start of the run:

```
LD_LIBRARY_PATH = "/opt/cpu2006-1.2/libs/32:/opt/cpu2006-1.2/libs/64"
Intel HT Technology=enable
```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Cisco Systems

SPECfp_rate2006 = 162

Cisco UCS C22 M3 (Intel Xeon E5-2430, 2.20 GHz)

SPECfp_rate_base2006 = 158

CPU2006 license: 9019

Test date: Jan-2013

Test sponsor: Cisco Systems

Hardware Availability: Sep-2012

Tested by: Cisco Systems

Software Availability: Feb-2012

General Notes (Continued)

Binaries compiled on a system with 2 X Intel Xeon E5-2690 CPU + 128 GB memory using RHEL 6.2
Transparent Huge Pages enabled with:
echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled
Filesystem page cache cleared with:
echo 1> /proc/sys/vm/drop_caches

Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.deallI: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:

-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Cisco Systems

SPECfp_rate2006 = 162

Cisco UCS C22 M3 (Intel Xeon E5-2430, 2.20 GHz)

SPECfp_rate_base2006 = 158

CPU2006 license: 9019

Test date: Jan-2013

Test sponsor: Cisco Systems

Hardware Availability: Sep-2012

Tested by: Cisco Systems

Software Availability: Feb-2012

Base Optimization Flags (Continued)

C++ benchmarks:

-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

Fortran benchmarks:

-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch

Benchmarks using both Fortran and C:

-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m64

482.sphinx3: icc -m32

C++ benchmarks (except as noted below):

icpc -m64

450.soplex: icpc -m32

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Cisco Systems

SPECfp_rate2006 = 162

Cisco UCS C22 M3 (Intel Xeon E5-2430, 2.20 GHz)

SPECfp_rate_base2006 = 158

CPU2006 license: 9019

Test date: Jan-2013

Test sponsor: Cisco Systems

Hardware Availability: Sep-2012

Tested by: Cisco Systems

Software Availability: Feb-2012

Peak Optimization Flags

C benchmarks:

433.milc: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -static -auto-ilp32
-opt-mem-layout-trans=3

470.lbm: basepeak = yes

482.sphinx3: -xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -static
-unroll2

C++ benchmarks:

444.namd: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -fno-alias
-auto-ilp32

447.dealII: basepeak = yes

450.soplex: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -opt-malloc-options=3

453.povray: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -auto-ilp32
-opt-mem-layout-trans=3

Fortran benchmarks:

410.bwaves: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -static

416.gamess: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2
-inline-level=0 -scalar-rep- -static

434.zeusmp: basepeak = yes

437.leslie3d: -xAVX -ipo -O3 -no-prec-div -static -opt-prefetch

459.GemsFDTD: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -opt-malloc-options=3

465.tonto: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -auto
-inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xAVX(pass 2) -prof-gen(pass 1) -ipo -O3 -no-prec-div
-prof-use(pass 2) -xSSE4.2 -opt-prefetch -static
-auto-ilp32 -opt-mem-layout-trans=3

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Cisco Systems

SPECfp_rate2006 = 162

Cisco UCS C22 M3 (Intel Xeon E5-2430, 2.20 GHz)

SPECfp_rate_base2006 = 158

CPU2006 license: 9019

Test date: Jan-2013

Test sponsor: Cisco Systems

Hardware Availability: Sep-2012

Tested by: Cisco Systems

Software Availability: Feb-2012

Peak Optimization Flags (Continued)

436.cactusADM: basepeak = yes

454.calculix: -xAVX -ipo -O3 -no-prec-div -static -auto-ilp32
-opt-mem-layout-trans=3

481.wrf: Same as 454.calculix

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20120425.html>

<http://www.spec.org/cpu2006/flags/Cisco-Platform-Settings-V1.2.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20120425.xml>

<http://www.spec.org/cpu2006/flags/Cisco-Platform-Settings-V1.2.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Thu Jul 24 15:02:08 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 12 February 2013.