



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ACTION S.A.

SPECint®_rate2006 = 173

ACTINA SOLAR 220 S5 (Intel Xeon E5-2603)

SPECint_rate_base2006 = 166

CPU2006 license: 9008


Test sponsor: ACTION S.A.

Tested by: ACTION S.A.

Test date: Jan-2013

Hardware Availability: Mar-2012

Software Availability: Feb-2012

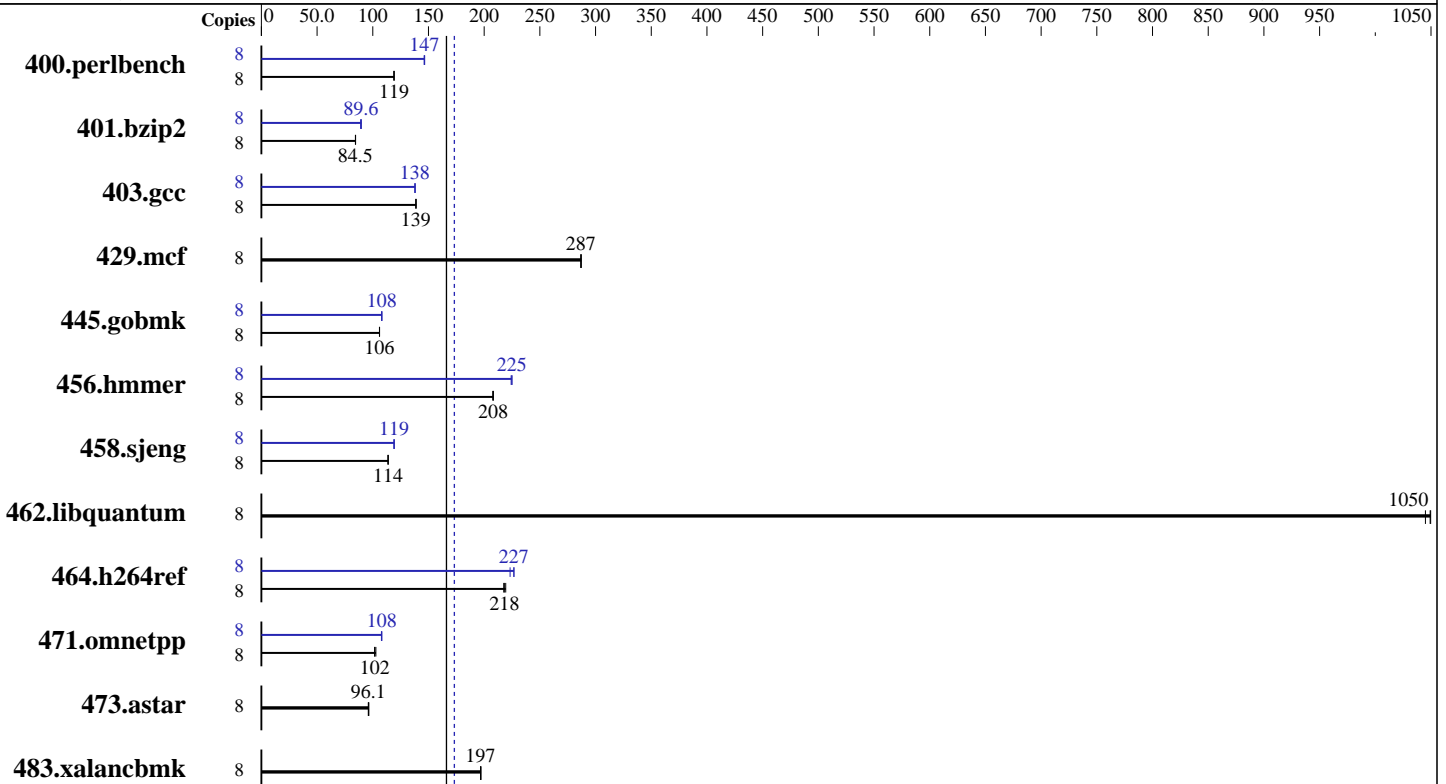

SPECint_rate2006 = 173

SPECint_rate_base2006 = 166

Hardware

CPU Name: Intel Xeon E5-2603
 CPU Characteristics:
 CPU MHz: 1800
 FPU: Integrated
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip
 CPU(s) orderable: 1,2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core
 L3 Cache: 10 MB I+D on chip per chip
 Other Cache: None
 Memory: 256 GB (16 x 16 GB 2Rx4 PC3-12800R-11, ECC, running at 1066 MHz and CL7)
 Disk Subsystem: 1 x 2 TB SATA, 7200 RPM
 Other Hardware: None

Software

Operating System: SUSE Linux Enterprise Server 11 SP2 (x86_64) 3.0.13-0.27-default
 Compiler: C/C++; Version 12.1.0.225 of Intel C++ Studio XE for Linux
 Auto Parallel: No
 File System: ext3
 System State: Run level 3 (multi-user)
 Base Pointers: 32-bit
 Peak Pointers: 32/64-bit
 Other Software: Microquill SmartHeap V9.01



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ACTION S.A.

SPECint_rate2006 = 173

ACTINA SOLAR 220 S5 (Intel Xeon E5-2603)

SPECint_rate_base2006 = 166

CPU2006 license: 9008
Test sponsor: ACTION S.A.
Tested by: ACTION S.A.

Test date: Jan-2013
Hardware Availability: Mar-2012
Software Availability: Feb-2012

Results Table

| Benchmark | Base | | | | | | | Peak | | | | | | |
|----------------|--------|------------|-------------|------------|------------|------------|-------------|--------|------------|------------|------------|-------------|------------|-------------|
| | Copies | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio | Copies | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio |
| 400.perlbench | 8 | 657 | 119 | 656 | 119 | 656 | 119 | 8 | 533 | 147 | 535 | 146 | 533 | 147 |
| 401.bzip2 | 8 | 914 | 84.5 | 913 | 84.6 | 914 | 84.4 | 8 | 866 | 89.1 | 862 | 89.6 | 861 | 89.7 |
| 403.gcc | 8 | 464 | 139 | 464 | 139 | 464 | 139 | 8 | 467 | 138 | 467 | 138 | 467 | 138 |
| 429.mcf | 8 | 254 | 287 | 254 | 287 | 254 | 287 | 8 | 254 | 287 | 254 | 287 | 254 | 287 |
| 445.gobmk | 8 | 791 | 106 | 792 | 106 | 791 | 106 | 8 | 776 | 108 | 776 | 108 | 777 | 108 |
| 456.hammer | 8 | 358 | 208 | 359 | 208 | 359 | 208 | 8 | 332 | 225 | 332 | 225 | 333 | 224 |
| 458.sjeng | 8 | 851 | 114 | 851 | 114 | 851 | 114 | 8 | 812 | 119 | 812 | 119 | 813 | 119 |
| 462.libquantum | 8 | 158 | 1050 | 159 | 1050 | 158 | 1050 | 8 | 158 | 1050 | 159 | 1050 | 158 | 1050 |
| 464.h264ref | 8 | 812 | 218 | 807 | 219 | 814 | 218 | 8 | 781 | 227 | 781 | 227 | 793 | 223 |
| 471.omnetpp | 8 | 486 | 103 | 492 | 102 | 492 | 102 | 8 | 463 | 108 | 464 | 108 | 463 | 108 |
| 473.astar | 8 | 585 | 96.0 | 582 | 96.5 | 584 | 96.1 | 8 | 585 | 96.0 | 582 | 96.5 | 584 | 96.1 |
| 483.xalancbmk | 8 | 280 | 197 | 280 | 197 | 281 | 197 | 8 | 280 | 197 | 280 | 197 | 281 | 197 |

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

Sysinfo program /cpu2006.1.2/config/sysinfo.rev6800
\$Rev: 6800 \$ \$Date:: 2011-10-11 #\$ 6f2ebdff5032aaa42e583f96b07f99d3
running on SUT Sat Jan 19 15:04:36 2013

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E5-2603 0 @ 1.80GHz
2 "physical id"s (chips)
8 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
cpu cores : 4
siblings : 4

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ACTION S.A.

SPECint_rate2006 = 173

ACTINA SOLAR 220 S5 (Intel Xeon E5-2603)

SPECint_rate_base2006 = 166

CPU2006 license: 9008

Test date: Jan-2013

Test sponsor: ACTION S.A.

Hardware Availability: Mar-2012

Tested by: ACTION S.A.

Software Availability: Feb-2012

Platform Notes (Continued)

```
physical 0: cores 0 1 2 3
physical 1: cores 0 1 2 3
cache size : 10240 KB
```

```
From /proc/meminfo
MemTotal:      264521160 kB
HugePages_Total: 0
Hugepagesize:  2048 kB
```

```
/usr/bin/lsb_release -d
SUSE Linux Enterprise Server 11 (x86_64)
```

```
From /etc/*release* /etc/*version*
SuSE-release:
SUSE Linux Enterprise Server 11 (x86_64)
VERSION = 11
PATCHLEVEL = 2
```

```
uname -a:
Linux SUT 3.0.13-0.27-default #1 SMP Wed Feb 15 13:33:49 UTC 2012 (d73692b)
x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 Jan 16 08:23 last=S
```

```
SPEC is set to: /cpu2006.1.2
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda2       ext3  1.6T   64G  1.5T   5% /
```

Additional information from dmidecode:

(End of data from sysinfo program)

General Notes

Environment variables set by runspec before the start of the run:

LD_LIBRARY_PATH = "/cpu2006.1.2/libs/32:/cpu2006.1.2/libs/64"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB memory using RHEL5.5

Transparent Huge Pages enabled with:

```
echo always > /sys/kernel/mm/transparent_hugepage/enabled
```

Filesystem page cache cleared with:

```
echo 1> /proc/sys/vm/drop_caches
```

runspec command invoked through numactl i.e.:

```
numactl --interleave=all runspec <etc>
```



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ACTION S.A.

SPECint_rate2006 = 173

ACTINA SOLAR 220 S5 (Intel Xeon E5-2603)

SPECint_rate_base2006 = 166

CPU2006 license: 9008

Test date: Jan-2013

Test sponsor: ACTION S.A.

Hardware Availability: Mar-2012

Tested by: ACTION S.A.

Software Availability: Feb-2012

Base Compiler Invocation

C benchmarks:

`icc -m32`

C++ benchmarks:

`icpc -m32`

Base Portability Flags

400.perlbench: `-DSPEC_CPU_LINUX_IA32`
462.libquantum: `-DSPEC_CPU_LINUX`
483.xalancbmk: `-DSPEC_CPU_LINUX`

Base Optimization Flags

C benchmarks:

`-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3`

C++ benchmarks:

`-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3
-Wl,-z,muldefs -L/smartheap -lsmartheap`

Base Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

Peak Compiler Invocation

C benchmarks (except as noted below):

`icc -m32`

400.perlbench: `icc -m64`

401.bzip2: `icc -m64`

456.hmmer: `icc -m64`

458.sjeng: `icc -m64`

C++ benchmarks:

`icpc -m32`



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ACTION S.A.

SPECint_rate2006 = 173

ACTINA SOLAR 220 S5 (Intel Xeon E5-2603)

SPECint_rate_base2006 = 166

CPU2006 license: 9008

Test date: Jan-2013

Test sponsor: ACTION S.A.

Hardware Availability: Mar-2012

Tested by: ACTION S.A.

Software Availability: Feb-2012

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
 401.bzip2: -DSPEC_CPU_LP64
 456.hmmer: -DSPEC_CPU_LP64
 458.sjeng: -DSPEC_CPU_LP64
 462.libquantum: -DSPEC_CPU_LINUX
 483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
 -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
 -auto-ilp32

401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
 -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
 -opt-prefetch -auto-ilp32 -ansi-alias

403.gcc: -xSSE4.2 -ipo -O3 -no-prec-div

429.mcf: basepeak = yes

445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)
 -ansi-alias -opt-mem-layout-trans=3

456.hmmer: -xSSE4.2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32

458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
 -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
 -unroll4 -auto-ilp32

462.libquantum: basepeak = yes

464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
 -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
 -unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
 -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
 -ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs
 -L/smartheap -lsmartheap

473.astar: basepeak = yes

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ACTION S.A.

SPECint_rate2006 = 173

ACTINA SOLAR 220 S5 (Intel Xeon E5-2603)

SPECint_rate_base2006 = 166

CPU2006 license: 9008

Test date: Jan-2013

Test sponsor: ACTION S.A.

Hardware Availability: Mar-2012

Tested by: ACTION S.A.

Software Availability: Feb-2012

Peak Optimization Flags (Continued)

483.xalanbmk: basepeak = yes

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Thu Jul 24 15:07:22 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 12 February 2013.