



# SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Dell Inc.

PowerEdge R210 II (Intel Xeon E3-1280 v2, 3.60 GHz)

SPECfp®2006 = **71.0**

SPECfp\_base2006 = **68.8**

CPU2006 license: 55


Test sponsor: Dell Inc.

Tested by: Dell Inc.

Test date: Mar-2012

Hardware Availability: May-2012

Software Availability: Feb-2012

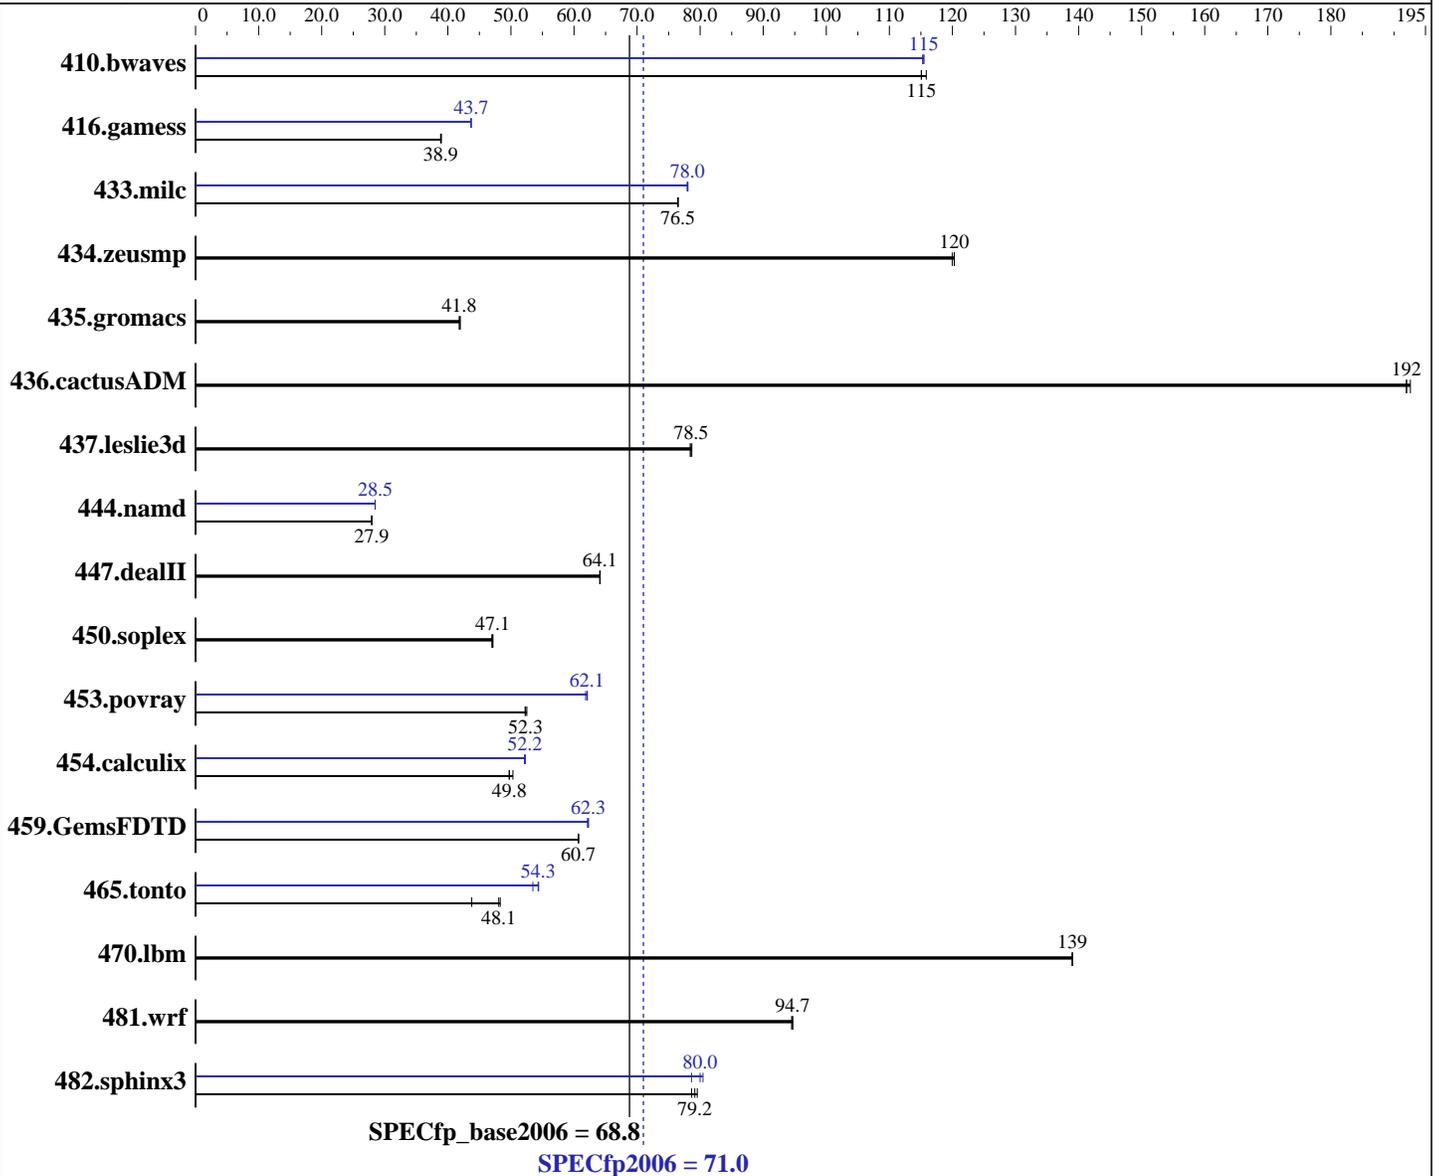

### Hardware

CPU Name: Intel Xeon E3-1280 v2  
 CPU Characteristics: Intel Turbo Boost Technology up to 4.00 GHz  
 CPU MHz: 3600  
 FPU: Integrated  
 CPU(s) enabled: 4 cores, 1 chip, 4 cores/chip, 2 threads/core  
 CPU(s) orderable: 1 chip  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

### Software

Operating System: SUSE Linux Enterprise Server 11 SP2 (x86\_64) 3.0.13-0.9-default  
 Compiler: C/C++: Version 12.1.0.225 of Intel C++ Studio XE for Linux;  
 Fortran: Version 12.1.0.225 of Intel Fortran Studio XE for Linux  
 Auto Parallel: Yes  
 File System: ext3  
 System State: Run level 3

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp2006 = 71.0

PowerEdge R210 II (Intel Xeon E3-1280 v2, 3.60 GHz)

SPECfp\_base2006 = 68.8

CPU2006 license: 55

Test date: Mar-2012

Test sponsor: Dell Inc.

Hardware Availability: May-2012

Tested by: Dell Inc.

Software Availability: Feb-2012

L3 Cache: 8 MB I+D on chip per chip  
Other Cache: None  
Memory: 16 GB (2 x 8 GB 2Rx8 PC3-12800R-11, ECC)  
Disk Subsystem: 1 TB 7200 RPM SATA  
Other Hardware: None

Base Pointers: 64-bit  
Peak Pointers: 32/64-bit  
Other Software: None

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	<b>118</b>	<b>115</b>	117	116	118	115	118	115	118	115	<b>118</b>	<b>115</b>
416.gamess	<b>504</b>	<b>38.9</b>	504	38.9	502	39.0	<b>448</b>	<b>43.7</b>	448	43.7	448	43.7
433.milc	120	76.5	120	76.5	<b>120</b>	<b>76.5</b>	118	78.1	118	77.9	<b>118</b>	<b>78.0</b>
434.zeusmp	75.9	120	75.7	120	<b>75.7</b>	<b>120</b>	75.9	120	75.7	120	<b>75.7</b>	<b>120</b>
435.gromacs	170	42.0	171	41.8	<b>171</b>	<b>41.8</b>	170	42.0	171	41.8	<b>171</b>	<b>41.8</b>
436.cactusADM	62.0	193	<b>62.2</b>	<b>192</b>	62.2	192	62.0	193	<b>62.2</b>	<b>192</b>	62.2	192
437.leslie3d	119	78.7	120	78.4	<b>120</b>	<b>78.5</b>	119	78.7	120	78.4	<b>120</b>	<b>78.5</b>
444.namd	287	27.9	287	27.9	<b>287</b>	<b>27.9</b>	282	28.5	282	28.5	<b>282</b>	<b>28.5</b>
447.dealII	178	64.1	178	64.1	<b>178</b>	<b>64.1</b>	178	64.1	178	64.1	<b>178</b>	<b>64.1</b>
450.soplex	177	47.1	178	47.0	<b>177</b>	<b>47.1</b>	177	47.1	178	47.0	<b>177</b>	<b>47.1</b>
453.povray	102	52.2	<b>102</b>	<b>52.3</b>	101	52.5	86.0	61.8	85.6	62.1	<b>85.7</b>	<b>62.1</b>
454.calculix	166	49.7	<b>166</b>	<b>49.8</b>	164	50.3	<b>158</b>	<b>52.2</b>	158	52.3	158	52.2
459.GemsFDTD	175	60.8	175	60.7	<b>175</b>	<b>60.7</b>	170	62.3	171	62.1	<b>170</b>	<b>62.3</b>
465.tonto	204	48.3	<b>205</b>	<b>48.1</b>	225	43.8	181	54.4	<b>181</b>	<b>54.3</b>	184	53.5
470.lbm	98.8	139	<b>98.8</b>	<b>139</b>	98.8	139	98.8	139	<b>98.8</b>	<b>139</b>	98.8	139
481.wrf	118	94.7	118	94.5	<b>118</b>	<b>94.7</b>	118	94.7	118	94.5	<b>118</b>	<b>94.7</b>
482.sphinx3	245	79.5	<b>246</b>	<b>79.2</b>	248	78.6	242	80.5	248	78.6	<b>244</b>	<b>80.0</b>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

CPU Power Management set to Maximum Performance  
Memory Frequency set to Maximum Performance  
Turbo Boost set to Enabled  
C States/C1E set to Enabled  
Sysinfo program /root/CPU2006-1.2/config/sysinfo.rev6800  
\$Rev: 6800 \$ \$Date:: 2011-10-11 #\$ 6f2ebdff5032aaa42e583f96b07f99d3  
running on linux-htyj Wed Mar 7 02:36:29 2012

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Dell Inc.**

**SPECfp2006 = 71.0**

PowerEdge R210 II (Intel Xeon E3-1280 v2, 3.60 GHz)

**SPECfp\_base2006 = 68.8**

**CPU2006 license:** 55

**Test date:** Mar-2012

**Test sponsor:** Dell Inc.

**Hardware Availability:** May-2012

**Tested by:** Dell Inc.

**Software Availability:** Feb-2012

## Platform Notes (Continued)

<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name : Intel(R) Xeon(R) CPU E3-1280 V2 @ 3.60GHz
1 "physical id"s (chips)
8 "processors"
```

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

```
cpu cores : 4
siblings  : 8
physical 0: cores 0 1 2 3
cache size : 8192 KB
```

From /proc/meminfo

```
MemTotal:      16326560 kB
HugePages_Total:    0
Hugepagesize:    2048 kB
```

/usr/bin/lsb\_release -d

```
SUSE Linux Enterprise Server 11 (x86_64)
```

From /etc/\*release\* /etc/\*version\*

```
SuSE-release:
SUSE Linux Enterprise Server 11 (x86_64)
VERSION = 11
PATCHLEVEL = 2
```

uname -a:

```
Linux linux-htyj 3.0.13-0.9-default #1 SMP Mon Jan 16 17:33:03 UTC 2012
(54ddfaf) x86_64 x86_64 x86_64 GNU/Linux
```

run-level 3 Mar 6 21:35 last=S

SPEC is set to: /root/CPU2006-1.2

```
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda2        ext3  913G   27G  840G   4% /
```

Additional information from dmidecode:

(End of data from sysinfo program)

## General Notes

Environment variables set by runspec before the start of the run:

```
KMP_AFFINITY = "granularity=fine,scatter"
LD_LIBRARY_PATH = "/root/CPU2006-1.2/libs/32:/root/CPU2006-1.2/libs/64"
OMP_NUM_THREADS = "4"
```

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB memory using RHEL5.5

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Dell Inc.**

**SPECfp2006 = 71.0**

PowerEdge R210 II (Intel Xeon E3-1280 v2, 3.60 GHz)

**SPECfp\_base2006 = 68.8**

**CPU2006 license:** 55

**Test date:** Mar-2012

**Test sponsor:** Dell Inc.

**Hardware Availability:** May-2012

**Tested by:** Dell Inc.

**Software Availability:** Feb-2012

## General Notes (Continued)

Transparent Huge Pages disabled with:  
echo never > /sys/kernel/mm/transparent\_hugepage/enabled  
Filesystem page cache cleared with:  
echo 1> /proc/sys/vm/drop\_caches

## Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.dealII: -DSPEC\_CPU\_LP64  
450.soplex: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
482.sphinx3: -DSPEC\_CPU\_LP64

## Base Optimization Flags

C benchmarks:

-xAVX -ipo -O3 -no-prec-div -static -parallel -opt-prefetch  
-ansi-alias

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Dell Inc.**

PowerEdge R210 II (Intel Xeon E3-1280 v2, 3.60 GHz)

**SPECfp2006 = 71.0**

**SPECfp\_base2006 = 68.8**

**CPU2006 license:** 55

**Test sponsor:** Dell Inc.

**Tested by:** Dell Inc.

**Test date:** Mar-2012

**Hardware Availability:** May-2012

**Software Availability:** Feb-2012

## Base Optimization Flags (Continued)

C++ benchmarks:

`-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -ansi-alias`

Fortran benchmarks:

`-xAVX -ipo -O3 -no-prec-div -static -parallel -opt-prefetch`

Benchmarks using both Fortran and C:

`-xAVX -ipo -O3 -no-prec-div -static -parallel -opt-prefetch  
-ansi-alias`

## Peak Compiler Invocation

C benchmarks:

`icc -m64`

C++ benchmarks:

`icpc -m64`

Fortran benchmarks:

`ifort -m64`

Benchmarks using both Fortran and C:

`icc -m64 ifort -m64`

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

433.milc: `-xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -static -auto-ilp32  
-ansi-alias`

470.lbm: `basepeak = yes`

482.sphinx3: `-xAVX -ipo -O3 -no-prec-div -unroll2 -ansi-alias  
-parallel`

C++ benchmarks:

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Dell Inc.**

**SPECfp2006 = 71.0**

PowerEdge R210 II (Intel Xeon E3-1280 v2, 3.60 GHz)

**SPECfp\_base2006 = 68.8**

**CPU2006 license:** 55

**Test date:** Mar-2012

**Test sponsor:** Dell Inc.

**Hardware Availability:** May-2012

**Tested by:** Dell Inc.

**Software Availability:** Feb-2012

## Peak Optimization Flags (Continued)

444.namd: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -fno-alias  
-auto-ilp32

447.dealII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -ansi-alias

### Fortran benchmarks:

410.bwaves: -xAVX -ipo -O3 -no-prec-div -opt-prefetch -parallel  
-static

416.gamess: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2  
-inline-level=0 -scalar-rep- -static

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2  
-inline-level=0 -opt-prefetch -parallel

465.tonto: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -inline-calloc  
-opt-malloc-options=3 -auto -unroll4

### Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

454.calculix: -xAVX -ipo -O3 -no-prec-div -auto-ilp32 -ansi-alias

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.html>

<http://www.spec.org/cpu2006/flags/Dell-Platform-Settings-V1.2-revA.20120410.00.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.xml>

<http://www.spec.org/cpu2006/flags/Dell-Platform-Settings-V1.2-revA.20120410.00.xml>



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Dell Inc.**

PowerEdge R210 II (Intel Xeon E3-1280 v2, 3.60 GHz)

**SPECfp2006 = 71.0**

**SPECfp\_base2006 = 68.8**

**CPU2006 license:** 55

**Test sponsor:** Dell Inc.

**Tested by:** Dell Inc.

**Test date:** Mar-2012

**Hardware Availability:** May-2012

**Software Availability:** Feb-2012

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Thu Jul 24 15:07:36 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 12 February 2013.