



SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Cisco Systems

SPECfp®2006 = 59.4

Cisco UCS B420 M3 (Intel Xeon E5-4620, 2.2 GHz)

SPECfp_base2006 = 56.6

CPU2006 license: 9019


Test date: Feb-2013

Test sponsor: Cisco Systems

Hardware Availability: Sep-2012

Tested by: Cisco Systems

Software Availability: Feb-2012

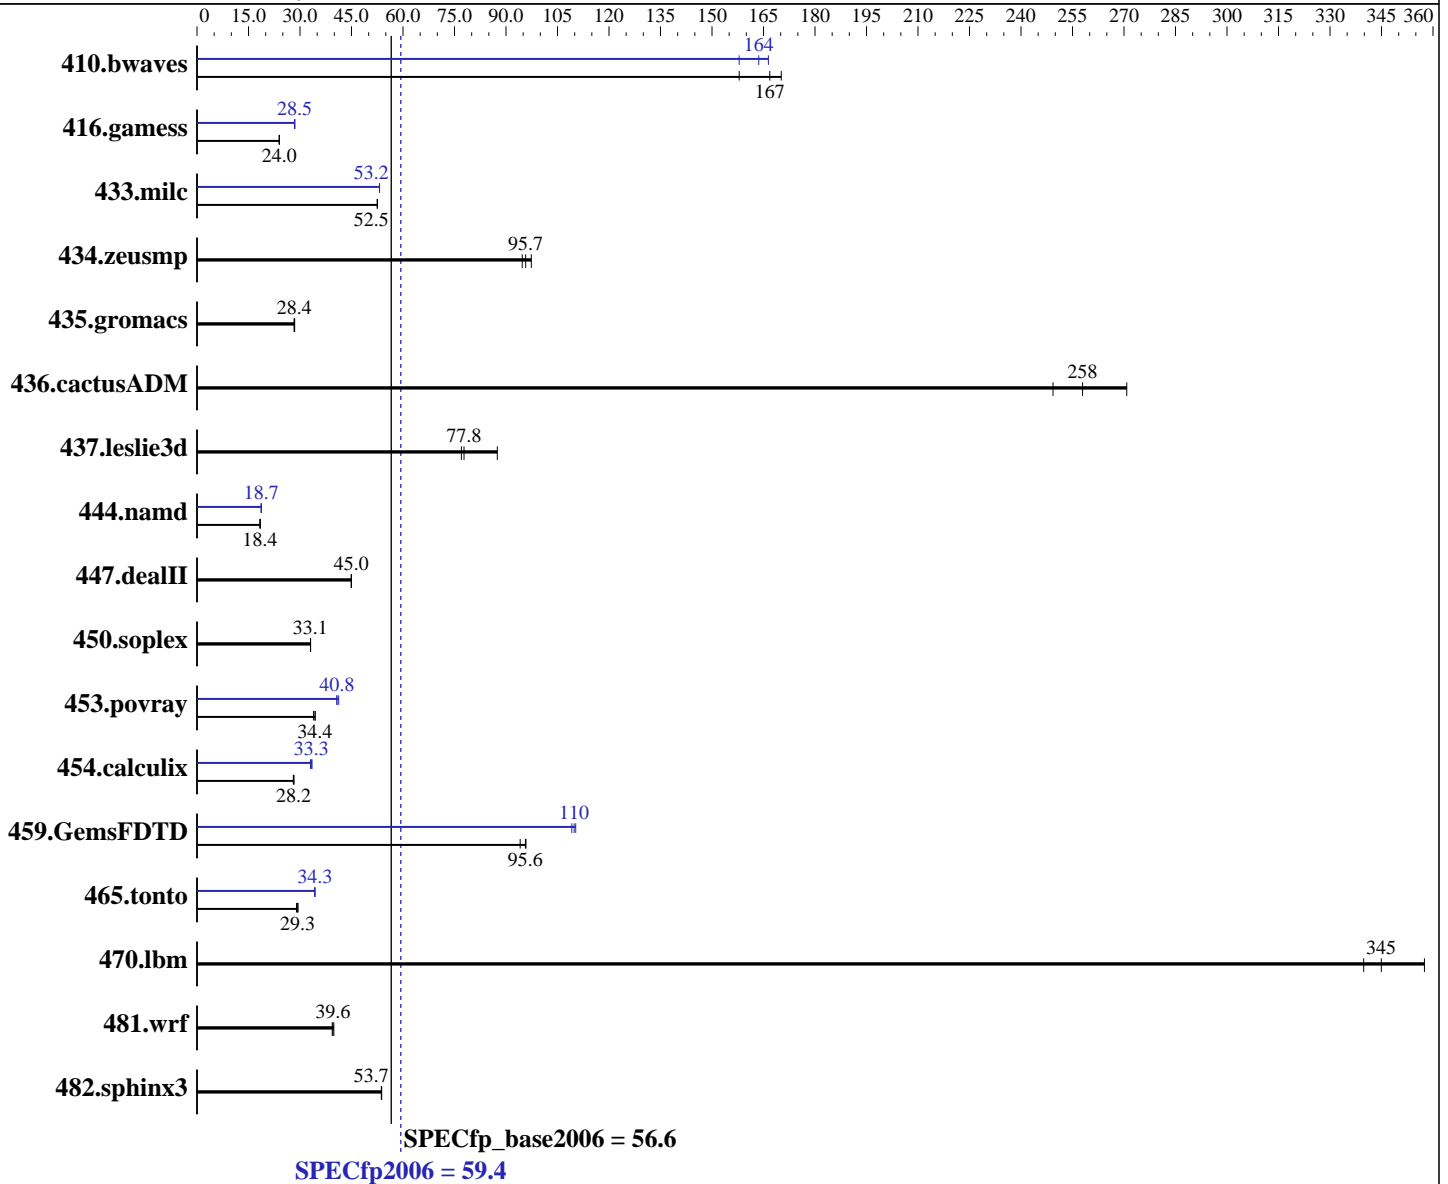

Hardware

CPU Name: Intel Xeon E5-4620
 CPU Characteristics: Intel Turbo Boost Technology up to 2.60 GHz
 CPU MHz: 2200
 FPU: Integrated
 CPU(s) enabled: 32 cores, 4 chips, 8 cores/chip
 CPU(s) orderable: 1,2,3,4 chip
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

Software

Operating System: Red Hat Enterprise Linux Server release 6.2 (Santiago)
 2.6.32-220.el6.x86_64
 Compiler: C/C++: Version 12.1.3.293 of Intel C++ Studio XE for Linux;
 Fortran: Version 12.1.3.293 of Intel Fortran Studio XE for Linux
 Auto Parallel: Yes
 File System: ext4

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Cisco Systems

SPECfp2006 = **59.4**

Cisco UCS B420 M3 (Intel Xeon E5-4620, 2.2 GHz)

SPECfp_base2006 = **56.6**

CPU2006 license: 9019

Test date: Feb-2013

Test sponsor: Cisco Systems

Hardware Availability: Sep-2012

Tested by: Cisco Systems

Software Availability: Feb-2012

L3 Cache: 16 MB I+D on chip per chip
 Other Cache: None
 Memory: 256 GB (32 x 8 GB 2Rx4 PC3-12800R-11, ECC)
 Disk Subsystem: 1 X 300 GB 15000 RPM SAS
 Other Hardware: None

System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 32/64-bit
 Other Software: None

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	86.1	158	81.5	167	79.9	170	81.7	166	86.1	158	83.1	164
416.gamess	816	24.0	819	23.9	815	24.0	688	28.5	690	28.4	687	28.5
433.milc	175	52.5	175	52.6	175	52.5	173	53.1	173	53.2	173	53.2
434.zeusmp	96.1	94.7	95.1	95.7	93.5	97.4	96.1	94.7	95.1	95.7	93.5	97.4
435.gromacs	252	28.3	252	28.4	251	28.5	252	28.3	252	28.4	251	28.5
436.cactusADM	46.3	258	47.9	249	44.1	271	46.3	258	47.9	249	44.1	271
437.leslie3d	107	87.5	122	77.0	121	77.8	107	87.5	122	77.0	121	77.8
444.namd	437	18.4	436	18.4	437	18.4	428	18.7	429	18.7	428	18.7
447.dealII	254	45.0	254	45.0	255	44.9	254	45.0	254	45.0	255	44.9
450.soplex	252	33.1	252	33.1	252	33.1	252	33.1	252	33.1	252	33.1
453.povray	155	34.4	155	34.4	157	34.0	131	40.8	131	40.7	129	41.3
454.calculix	292	28.2	293	28.2	294	28.1	250	33.0	246	33.5	248	33.3
459.GemsFDTD	111	95.6	113	94.1	111	95.8	96.2	110	96.6	110	97.2	109
465.tonto	340	29.0	335	29.3	335	29.4	287	34.3	287	34.3	287	34.3
470.lbm	39.8	345	38.4	358	40.4	340	39.8	345	38.4	358	40.4	340
481.wrf	280	39.9	284	39.4	282	39.6	280	39.9	284	39.4	282	39.6
482.sphinx3	363	53.7	363	53.7	362	53.8	363	53.7	363	53.7	362	53.8

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

BIOS Configuration:
 Processor C6 Report set to Disabled
 Processor C1E set to Disabled
 CPU Performance set to HPC
 LV DDR Mode set to Performance-mode
 Sysinfo program /opt/cpu2006-1.2/config/sysinfo.rev6800
 \$Rev: 6800 \$ \$Date:: 2011-10-11 #\$ 6f2ebdff5032aaa42e583f96b07f99d3
 running on localhost.localdomain Mon Feb 4 21:11:12 2013

This section contains SUT (System Under Test) info as seen by
Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Cisco Systems

SPECfp2006 = 59.4

Cisco UCS B420 M3 (Intel Xeon E5-4620, 2.2 GHz)

SPECfp_base2006 = 56.6

CPU2006 license: 9019

Test date: Feb-2013

Test sponsor: Cisco Systems

Hardware Availability: Sep-2012

Tested by: Cisco Systems

Software Availability: Feb-2012

Platform Notes (Continued)

some common utilities. To remove or add to this section, see:
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```

From /proc/cpuinfo
  model name : Intel(R) Xeon(R) CPU E5-4620 0 @ 2.20GHz
  4 "physical id"s (chips)
  32 "processors"
  cores, siblings (Caution: counting these is hw and system dependent. The
  following excerpts from /proc/cpuinfo might not be reliable. Use with
  caution.)
    cpu cores : 8
    siblings  : 8
    physical 0: cores 0 1 2 3 4 5 6 7
    physical 1: cores 0 1 2 3 4 5 6 7
    physical 2: cores 0 1 2 3 4 5 6 7
    physical 3: cores 0 1 2 3 4 5 6 7
  cache size : 16384 KB

```

```

From /proc/meminfo
MemTotal:      264506516 kB
HugePages_Total:    0
Hugepagesize:    2048 kB

```

```

/usr/bin/lsb_release -d
  Red Hat Enterprise Linux Server release 6.2 (Santiago)

```

```

From /etc/*release* /etc/*version*
redhat-release: Red Hat Enterprise Linux Server release 6.2 (Santiago)
system-release: Red Hat Enterprise Linux Server release 6.2 (Santiago)
system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server

```

```

uname -a:
Linux localhost.localdomain 2.6.32-220.el6.x86_64 #1 SMP Wed Nov 9 08:03:13
EST 2011 x86_64 x86_64 x86_64 GNU/Linux

```

run-level 3 Feb 4 21:03

```

SPEC is set to: /opt/cpu2006-1.2
Filesystem      Type      Size  Used Avail Use% Mounted on
/dev/sda1       ext4      275G  31G  230G  12% /

```

```

Additional information from dmidecode:
Memory:
  32x 0xCE00 M393B1K70DH0-YK0 8 GB 1600 MHz 2 rank

```

(End of data from sysinfo program)



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Cisco Systems

SPECfp2006 = 59.4

Cisco UCS B420 M3 (Intel Xeon E5-4620, 2.2 GHz)

SPECfp_base2006 = 56.6

CPU2006 license: 9019

Test date: Feb-2013

Test sponsor: Cisco Systems

Hardware Availability: Sep-2012

Tested by: Cisco Systems

Software Availability: Feb-2012

General Notes

Environment variables set by runspec before the start of the run:

KMP_AFFINITY = "granularity=fine,scatter"

LD_LIBRARY_PATH = "/opt/cpu2006-1.2/libs/32:/opt/cpu2006-1.2/libs/64"

OMP_NUM_THREADS = "32"

Intel HT Technology=disable

Binaries compiled on a system with 2 X Intel Xeon E5-2690 CPU + 128 GB memory using RHEL 6.2

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled

Filesystem page cache cleared with:

echo 1> /proc/sys/vm/drop_caches

Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
 416.gamess: -DSPEC_CPU_LP64
 433.milc: -DSPEC_CPU_LP64
 434.zeusmp: -DSPEC_CPU_LP64
 435.gromacs: -DSPEC_CPU_LP64 -nofor_main
 436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
 437.leslie3d: -DSPEC_CPU_LP64
 444.namd: -DSPEC_CPU_LP64
 447.dealII: -DSPEC_CPU_LP64
 450.soplex: -DSPEC_CPU_LP64
 453.povray: -DSPEC_CPU_LP64
 454.calculix: -DSPEC_CPU_LP64 -nofor_main
 459.GemsFDTD: -DSPEC_CPU_LP64
 465.tonto: -DSPEC_CPU_LP64
 470.lbm: -DSPEC_CPU_LP64
 481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
 482.sphinx3: -DSPEC_CPU_LP64



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Cisco Systems

SPECfp2006 = 59.4

Cisco UCS B420 M3 (Intel Xeon E5-4620, 2.2 GHz)

SPECfp_base2006 = 56.6

CPU2006 license: 9019

Test date: Feb-2013

Test sponsor: Cisco Systems

Hardware Availability: Sep-2012

Tested by: Cisco Systems

Software Availability: Feb-2012

Base Optimization Flags

C benchmarks:

-xAVX -ipo -O3 -no-prec-div -static -parallel -opt-prefetch
-ansi-alias

C++ benchmarks:

-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -ansi-alias

Fortran benchmarks:

-xAVX -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

Benchmarks using both Fortran and C:

-xAVX -ipo -O3 -no-prec-div -static -parallel -opt-prefetch
-ansi-alias

Peak Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

433.milc: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -static -auto-ilp32
-ansi-alias

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Cisco Systems

SPECfp2006 = 59.4

Cisco UCS B420 M3 (Intel Xeon E5-4620, 2.2 GHz)

SPECfp_base2006 = 56.6

CPU2006 license: 9019

Test date: Feb-2013

Test sponsor: Cisco Systems

Hardware Availability: Sep-2012

Tested by: Cisco Systems

Software Availability: Feb-2012

Peak Optimization Flags (Continued)

C++ benchmarks:

444.namd: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -fno-alias
-auto-ilp32

447.dealIII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: -xAVX -ipo -O3 -no-prec-div -opt-prefetch -parallel
-static

416.gamess: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2
-inline-level=0 -scalar-rep- -static

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2
-inline-level=0 -opt-prefetch -parallel

465.tonto: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -inline-calloc
-opt-malloc-options=3 -auto -unroll4

Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

454.calculix: -xAVX -ipo -O3 -no-prec-div -auto-ilp32 -ansi-alias

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic13-official-linux64.html>

<http://www.spec.org/cpu2006/flags/Cisco-Platform-Settings-V1.2.20130607.html>



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Cisco Systems

SPECfp2006 = 59.4

Cisco UCS B420 M3 (Intel Xeon E5-4620, 2.2 GHz)

SPECfp_base2006 = 56.6

CPU2006 license: 9019

Test date: Feb-2013

Test sponsor: Cisco Systems

Hardware Availability: Sep-2012

Tested by: Cisco Systems

Software Availability: Feb-2012

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic13-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/Cisco-Platform-Settings-V1.2.20130607.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Thu Jul 24 15:30:39 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 23 April 2013.