



SPEC[®] CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Cisco Systems

SPECfp[®]2006 = **64.7**

Cisco UCS C420 M3 (2.40 GHz, Intel Xeon E5-4640)

SPECfp_base2006 = **61.7**

CPU2006 license: 9019


Test date: Mar-2013

Test sponsor: Cisco Systems

Hardware Availability: Nov-2012

Tested by: Cisco Systems

Software Availability: Jun-2012

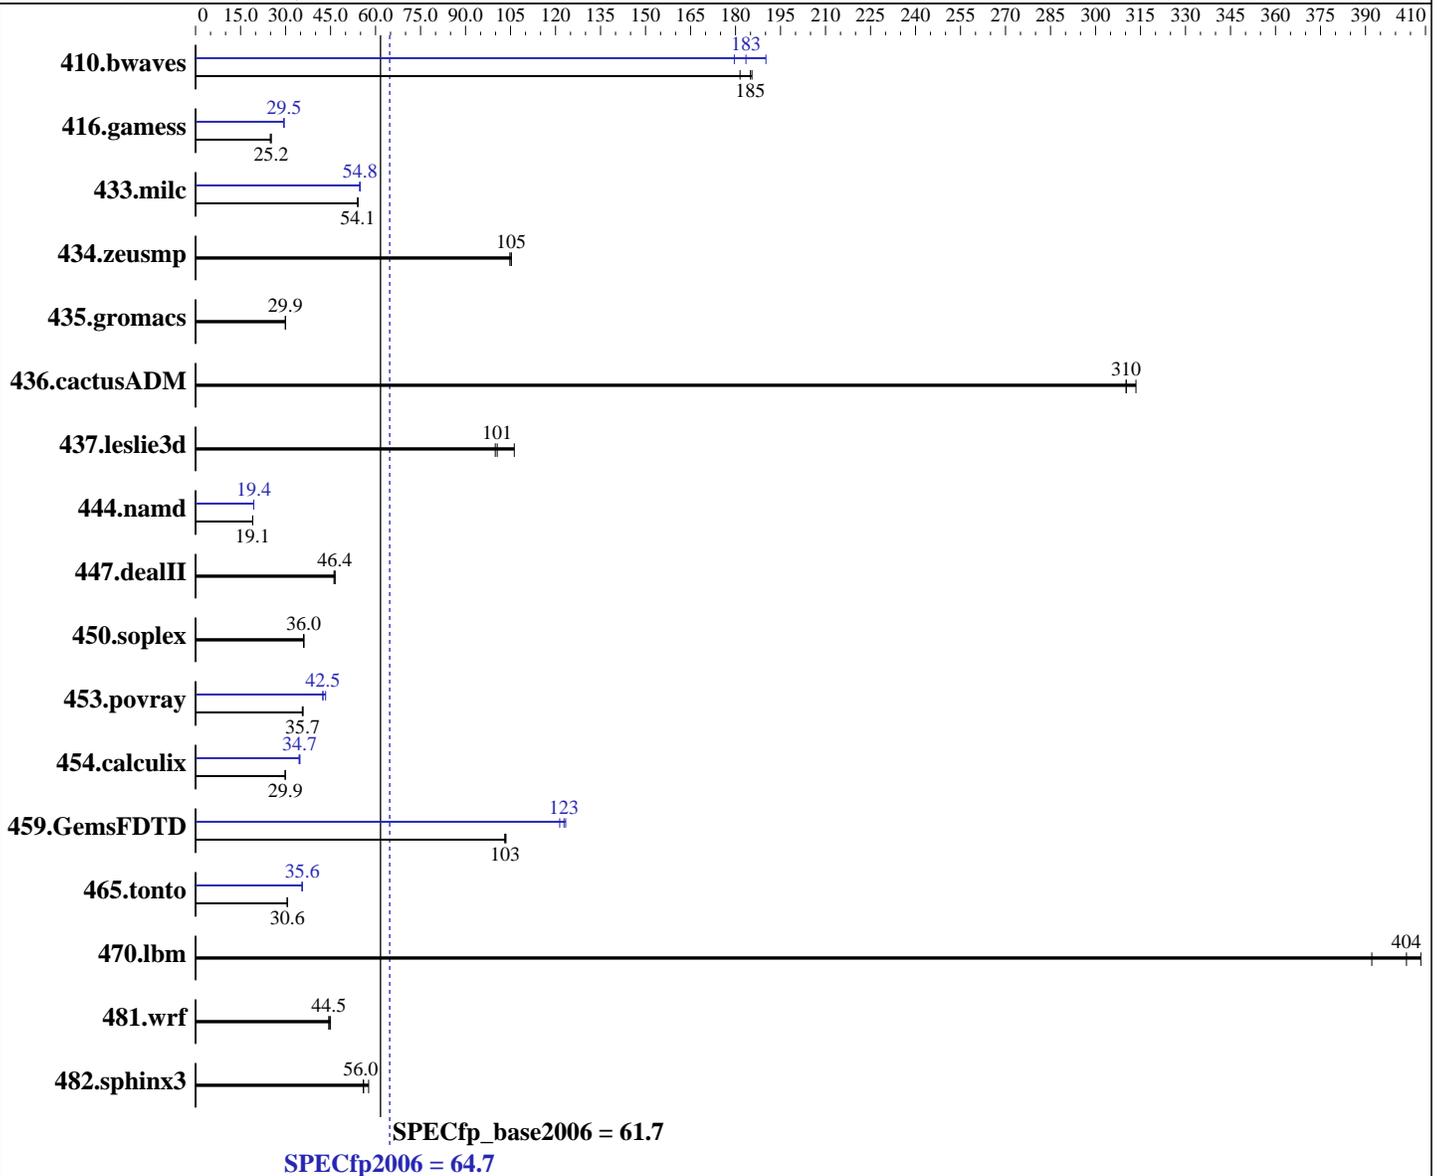

Hardware

CPU Name: Intel Xeon E5-4640
 CPU Characteristics: Intel Turbo Boost Technology up to 2.80 GHz
 CPU MHz: 2400
 FPU: Integrated
 CPU(s) enabled: 32 cores, 4 chips, 8 cores/chip, 2 threads/core
 CPU(s) orderable: 1,2,3,4 chip
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

Software

Operating System: Red Hat Enterprise Linux Server release 6.2 (Santiago)
 2.6.32-220.el6.x86_64
 Compiler: C/C++: Version 12.1.3.293 of Intel C++ Studio XE for Linux;
 Fortran: Version 12.1.3.293 of Intel Fortran Studio XE for Linux
 Auto Parallel: Yes
 File System: ext4

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Cisco Systems

SPECfp2006 = **64.7**

Cisco UCS C420 M3 (2.40 GHz, Intel Xeon E5-4640)

SPECfp_base2006 = **61.7**

CPU2006 license: 9019

Test date: Mar-2013

Test sponsor: Cisco Systems

Hardware Availability: Nov-2012

Tested by: Cisco Systems

Software Availability: Jun-2012

L3 Cache: 20 MB I+D on chip per chip
 Other Cache: None
 Memory: 512 GB (32 x 16 GB 2Rx4 PC3-12800R-11, ECC)
 Disk Subsystem: 1 X 600 GB 10000 RPM SAS
 Other Hardware: None

System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 32/64-bit
 Other Software: None

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio										
410.bwaves	73.3	185	<u>73.5</u>	<u>185</u>	74.9	182	<u>74.1</u>	<u>183</u>	71.5	190	75.7	180
416.gamess	786	24.9	777	25.2	<u>777</u>	<u>25.2</u>	<u>664</u>	<u>29.5</u>	664	29.5	666	29.4
433.milc	<u>170</u>	<u>54.1</u>	170	54.1	170	54.1	<u>168</u>	<u>54.8</u>	167	54.8	168	54.8
434.zeusmp	86.5	105	86.9	105	<u>86.5</u>	<u>105</u>	86.5	105	86.9	105	<u>86.5</u>	<u>105</u>
435.gromacs	<u>238</u>	<u>29.9</u>	238	30.0	238	29.9	<u>238</u>	<u>29.9</u>	238	30.0	238	29.9
436.cactusADM	38.5	310	<u>38.5</u>	<u>310</u>	38.1	313	38.5	310	<u>38.5</u>	<u>310</u>	38.1	313
437.leslie3d	88.5	106	<u>93.5</u>	<u>101</u>	94.1	99.9	88.5	106	<u>93.5</u>	<u>101</u>	94.1	99.9
444.namd	421	19.1	<u>421</u>	<u>19.1</u>	421	19.1	413	19.4	413	19.4	<u>413</u>	<u>19.4</u>
447.dealII	<u>246</u>	<u>46.4</u>	246	46.5	248	46.1	<u>246</u>	<u>46.4</u>	246	46.5	248	46.1
450.soplex	231	36.2	232	36.0	<u>232</u>	<u>36.0</u>	231	36.2	232	36.0	<u>232</u>	<u>36.0</u>
453.povray	148	35.8	<u>149</u>	<u>35.7</u>	149	35.6	123	43.4	<u>125</u>	<u>42.5</u>	125	42.4
454.calculix	<u>276</u>	<u>29.9</u>	276	29.9	276	29.9	237	34.8	<u>237</u>	<u>34.7</u>	239	34.5
459.GemsFDTD	103	103	<u>103</u>	<u>103</u>	103	103	<u>86.4</u>	<u>123</u>	86.0	123	87.4	121
465.tonto	<u>322</u>	<u>30.6</u>	322	30.6	321	30.6	277	35.5	<u>277</u>	<u>35.6</u>	276	35.6
470.lbm	<u>34.0</u>	<u>404</u>	35.0	392	33.6	408	<u>34.0</u>	<u>404</u>	35.0	392	33.6	408
481.wrf	248	45.0	<u>251</u>	<u>44.5</u>	251	44.4	248	45.0	<u>251</u>	<u>44.5</u>	251	44.4
482.sphinx3	338	57.7	348	55.9	<u>348</u>	<u>56.0</u>	338	57.7	348	55.9	<u>348</u>	<u>56.0</u>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

Sysinfo program /opt/cpu2006-1.2/config/sysinfo.rev6800
 \$Rev: 6800 \$ \$Date:: 2011-10-11 #\$ 6f2ebdff5032aaa42e583f96b07f99d3
 running on localhost.localdomain Thu Mar 7 22:08:22 2013

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo
 model name : Intel(R) Xeon(R) CPU E5-4640 0 @ 2.40GHz
 Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Cisco Systems

SPECfp2006 = 64.7

Cisco UCS C420 M3 (2.40 GHz, Intel Xeon E5-4640)

SPECfp_base2006 = 61.7

CPU2006 license: 9019

Test date: Mar-2013

Test sponsor: Cisco Systems

Hardware Availability: Nov-2012

Tested by: Cisco Systems

Software Availability: Jun-2012

Platform Notes (Continued)

```

4 "physical id"s (chips)
64 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
cpu cores : 8
siblings  : 16
physical 0: cores 0 1 2 3 4 5 6 7
physical 1: cores 0 1 2 3 4 5 6 7
physical 2: cores 0 1 2 3 4 5 6 7
physical 3: cores 0 1 2 3 4 5 6 7
cache size : 20480 KB

```

```

From /proc/meminfo
MemTotal:      529251840 kB
HugePages_Total:      0
Hugepagesize:    2048 kB

```

```

/usr/bin/lsb_release -d
Red Hat Enterprise Linux Server release 6.2 (Santiago)

```

```

From /etc/*release* /etc/*version*
redhat-release: Red Hat Enterprise Linux Server release 6.2 (Santiago)
system-release: Red Hat Enterprise Linux Server release 6.2 (Santiago)
system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server

```

```

uname -a:
Linux localhost.localdomain 2.6.32-220.el6.x86_64 #1 SMP Wed Nov 9 08:03:13
EST 2011 x86_64 x86_64 x86_64 GNU/Linux

```

run-level 3 Mar 7 22:05

```

SPEC is set to: /opt/cpu2006-1.2
Filesystem      Type      Size  Used Avail Use% Mounted on
/dev/sdal        ext4     458G   10G  425G   3% /

```

```

Additional information from dmidecode:
Memory:
32x 0xCE00 M393B2G70BH0-YK0 16 GB 1600 MHz 2 rank

```

(End of data from sysinfo program)

General Notes

Environment variables set by runspec before the start of the run:

```

KMP_AFFINITY = "granularity=fine,scatter"
LD_LIBRARY_PATH = "/opt/cpu2006-1.2/libs/32:/opt/cpu2006-1.2/libs/64"
OMP_NUM_THREADS = "32"
Intel HT Technology = Enable
Binaries compiled on a system with 2 X Intel Xeon E5-2690 CPU + 128 GB memory using RHEL 6.2
Transparent Huge Pages enabled with:

```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Cisco Systems

SPECfp2006 = 64.7

Cisco UCS C420 M3 (2.40 GHz, Intel Xeon E5-4640)

SPECfp_base2006 = 61.7

CPU2006 license: 9019

Test date: Mar-2013

Test sponsor: Cisco Systems

Hardware Availability: Nov-2012

Tested by: Cisco Systems

Software Availability: Jun-2012

General Notes (Continued)

```
echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled
Filesystem page cache cleared with:
echo 1> /proc/sys/vm/drop_caches
```

Submitted_by: "Sheshgiri I (shei)" <shei@cisco.com>

Submitted: Fri Apr 12 15:14:09 EDT 2013

Submission: cpu2006-20130412-25671.sub

Base Compiler Invocation

C benchmarks:

```
icc -m64
```

C++ benchmarks:

```
icpc -m64
```

Fortran benchmarks:

```
ifort -m64
```

Benchmarks using both Fortran and C:

```
icc -m64 ifort -m64
```

Base Portability Flags

```
410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64
```

Base Optimization Flags

C benchmarks:

```
-xAVX -ipo -O3 -no-prec-div -static -parallel -opt-prefetch
-ansi-alias
```

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

http://www.spec.org/

Page 4



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Cisco Systems

SPECfp2006 = 64.7

Cisco UCS C420 M3 (2.40 GHz, Intel Xeon E5-4640)

SPECfp_base2006 = 61.7

CPU2006 license: 9019

Test date: Mar-2013

Test sponsor: Cisco Systems

Hardware Availability: Nov-2012

Tested by: Cisco Systems

Software Availability: Jun-2012

Base Optimization Flags (Continued)

C++ benchmarks:

-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -ansi-alias

Fortran benchmarks:

-xAVX -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

Benchmarks using both Fortran and C:

-xAVX -ipo -O3 -no-prec-div -static -parallel -opt-prefetch
-ansi-alias

Peak Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

433.milc: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -static -auto-ilp32
-ansi-alias

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Cisco Systems

SPECfp2006 = 64.7

Cisco UCS C420 M3 (2.40 GHz, Intel Xeon E5-4640)

SPECfp_base2006 = 61.7

CPU2006 license: 9019

Test date: Mar-2013

Test sponsor: Cisco Systems

Hardware Availability: Nov-2012

Tested by: Cisco Systems

Software Availability: Jun-2012

Peak Optimization Flags (Continued)

444.namd: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -fno-alias
-auto-ilp32

447.dealII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: -xAVX -ipo -O3 -no-prec-div -opt-prefetch -parallel
-static

416.gamess: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2
-inline-level=0 -scalar-rep- -static

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2
-inline-level=0 -opt-prefetch -parallel

465.tonto: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -inline-calloc
-opt-malloc-options=3 -auto -unroll4

Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

454.calculix: -xAVX -ipo -O3 -no-prec-div -auto-ilp32 -ansi-alias

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20120425.html>

<http://www.spec.org/cpu2006/flags/Cisco-Platform-Settings-V1.2.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20120425.xml>

<http://www.spec.org/cpu2006/flags/Cisco-Platform-Settings-V1.2.xml>



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Cisco Systems

SPECfp2006 = 64.7

Cisco UCS C420 M3 (2.40 GHz, Intel Xeon E5-4640)

SPECfp_base2006 = 61.7

CPU2006 license: 9019

Test date: Mar-2013

Test sponsor: Cisco Systems

Hardware Availability: Nov-2012

Tested by: Cisco Systems

Software Availability: Jun-2012

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Thu Jul 24 15:33:57 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 7 May 2013.