



# SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## IBM Corporation

**SPECfp®2006 = 84.4**

IBM System x3650 M4  
(Intel Xeon E5-2630 v2, 2.60 GHz)

**SPECfp\_base2006 = 82.1**

**CPU2006 license:** 11


**Test date:** Oct-2013

**Test sponsor:** IBM Corporation

**Hardware Availability:** Nov-2013

**Tested by:** IBM Corporation

**Software Availability:** Sep-2013

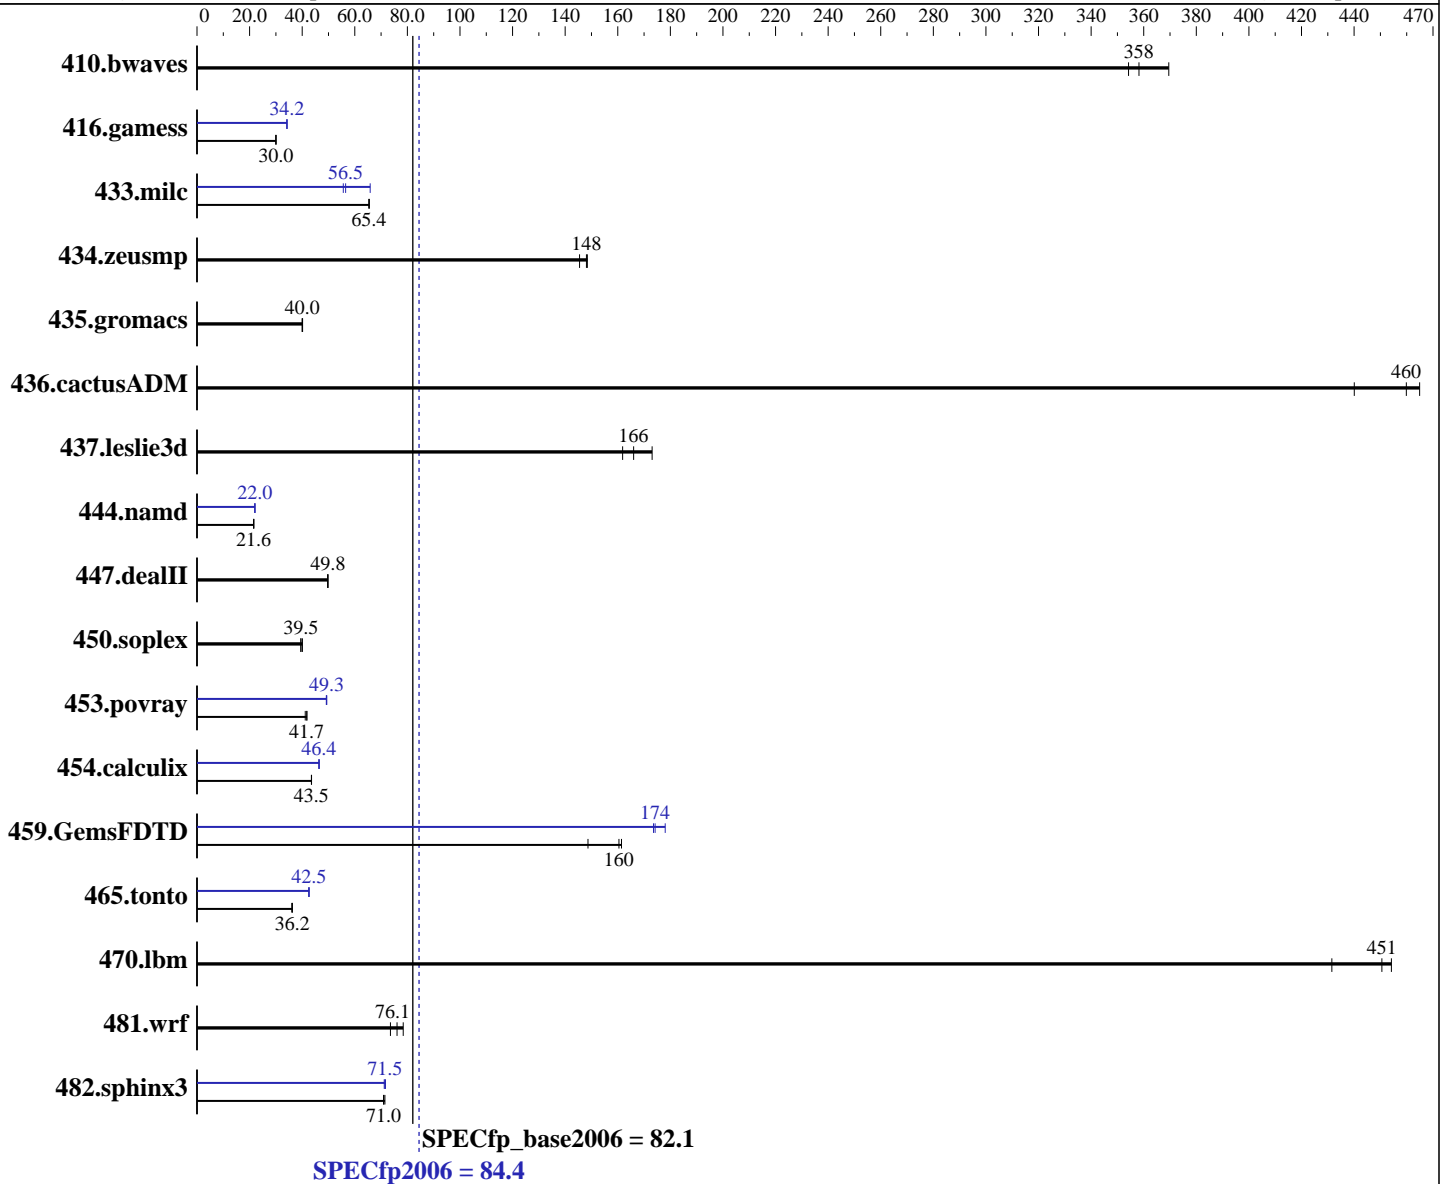

### Hardware

CPU Name: Intel Xeon E5-2630 v2  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.10 GHz  
 CPU MHz: 2600  
 FPU: Integrated  
 CPU(s) enabled: 12 cores, 2 chips, 6 cores/chip  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

### Software

Operating System: Red Hat Enterprise Linux Server release 6.4 (Santiago)  
 2.6.32-358.el6.x86\_64  
 Compiler: C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux;  
 Fortran: Version 14.0.0.080 of Intel Fortran Studio XE for Linux  
 Auto Parallel: Yes  
 File System: ext4

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## IBM Corporation

SPECfp2006 = **84.4**

IBM System x3650 M4  
(Intel Xeon E5-2630 v2, 2.60 GHz)

SPECfp\_base2006 = **82.1**

CPU2006 license: 11

Test date: Oct-2013

Test sponsor: IBM Corporation

Hardware Availability: Nov-2013

Tested by: IBM Corporation

Software Availability: Sep-2013

L3 Cache: 15 MB I+D on chip per chip  
Other Cache: None  
Memory: 256 GB (16 x 16 GB 2Rx4 PC3-14900R-13, ECC, running at 1600 MHz)  
Disk Subsystem: 1 x 400 GB SAS SSD, RAID 0  
Other Hardware: None

System State: Run level 3 (multi-user)  
Base Pointers: 64-bit  
Peak Pointers: 32/64-bit  
Other Software: None

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	36.8	370	38.4	354	<b><u>37.9</u></b>	<b><u>358</u></b>	36.8	370	38.4	354	<b><u>37.9</u></b>	<b><u>358</u></b>
416.gamess	<b><u>652</u></b>	<b><u>30.0</u></b>	652	30.0	653	30.0	572	34.2	<b><u>572</u></b>	<b><u>34.2</u></b>	573	34.2
433.milc	140	65.4	<b><u>140</u></b>	<b><u>65.4</u></b>	140	65.5	139	65.9	<b><u>162</u></b>	<b><u>56.5</u></b>	165	55.6
434.zeusmp	<b><u>61.5</u></b>	<b><u>148</u></b>	61.3	148	62.6	145	<b><u>61.5</u></b>	<b><u>148</u></b>	61.3	148	62.6	145
435.gromacs	178	40.2	178	40.0	<b><u>178</u></b>	<b><u>40.0</u></b>	178	40.2	178	40.0	<b><u>178</u></b>	<b><u>40.0</u></b>
436.cactusADM	27.2	440	<b><u>26.0</u></b>	<b><u>460</u></b>	25.7	465	27.2	440	<b><u>26.0</u></b>	<b><u>460</u></b>	25.7	465
437.leslie3d	<b><u>56.6</u></b>	<b><u>166</u></b>	58.1	162	54.3	173	<b><u>56.6</u></b>	<b><u>166</u></b>	58.1	162	54.3	173
444.namd	372	21.6	372	21.6	<b><u>372</u></b>	<b><u>21.6</u></b>	<b><u>364</u></b>	<b><u>22.0</u></b>	364	22.0	365	22.0
447.dealII	<b><u>230</u></b>	<b><u>49.8</u></b>	230	49.8	230	49.7	<b><u>230</u></b>	<b><u>49.8</u></b>	230	49.8	230	49.7
450.soplex	211	39.5	<b><u>211</u></b>	<b><u>39.5</u></b>	208	40.1	211	39.5	<b><u>211</u></b>	<b><u>39.5</u></b>	208	40.1
453.povray	127	41.8	<b><u>127</u></b>	<b><u>41.7</u></b>	129	41.2	<b><u>108</u></b>	<b><u>49.3</u></b>	108	49.3	108	49.2
454.calculix	<b><u>189</u></b>	<b><u>43.5</u></b>	189	43.6	190	43.5	178	46.5	<b><u>178</u></b>	<b><u>46.4</u></b>	178	46.3
459.GemsFDTD	<b><u>66.1</u></b>	<b><u>160</u></b>	71.4	149	65.7	161	61.1	174	<b><u>60.9</u></b>	<b><u>174</u></b>	59.6	178
465.tonto	<b><u>272</u></b>	<b><u>36.2</u></b>	271	36.2	273	36.1	231	42.5	231	42.7	<b><u>231</u></b>	<b><u>42.5</u></b>
470.ibm	31.8	432	30.3	454	<b><u>30.5</u></b>	<b><u>451</u></b>	31.8	432	30.3	454	<b><u>30.5</u></b>	<b><u>451</u></b>
481.wrf	<b><u>147</u></b>	<b><u>76.1</u></b>	152	73.6	142	78.4	<b><u>147</u></b>	<b><u>76.1</u></b>	152	73.6	142	78.4
482.sphinx3	273	71.5	<b><u>274</u></b>	<b><u>71.0</u></b>	275	70.9	272	71.7	<b><u>273</u></b>	<b><u>71.5</u></b>	274	71.2

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
Zone reclaim mode enabled with:
echo 1 > /proc/sys/vm/zone_reclaim_mode
```

## Platform Notes

```
BIOS setting:
Operating Mode set to Maximum Performance
Hyper-Threading set to Disabled
Sysinfo program /home/SPECcpu-new/config/sysinfo.rev6818
$Rev: 6818 $ $Date:: 2012-07-17 #$ e86d102572650a6e4d596a3cee98f191
running on x3650M4 Wed Oct 16 17:58:25 2013
```

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## IBM Corporation

SPECfp2006 = 84.4

IBM System x3650 M4  
(Intel Xeon E5-2630 v2, 2.60 GHz)

SPECfp\_base2006 = 82.1

**CPU2006 license:** 11  
**Test sponsor:** IBM Corporation  
**Tested by:** IBM Corporation

**Test date:** Oct-2013  
**Hardware Availability:** Nov-2013  
**Software Availability:** Sep-2013

### Platform Notes (Continued)

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see: <http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name      : Intel(R) Xeon(R) CPU E5-2630 v2 @ 2.60GHz
 2 "physical id"s (chips)
 12 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
cpu cores      : 6
siblings       : 6
physical 0:    cores 0 1 2 3 4 5
physical 1:    cores 0 1 2 3 4 5
cache size     : 15360 KB
```

```
From /proc/meminfo
MemTotal:      264343144 kB
HugePages_Total: 0
Hugepagesize:  2048 kB
```

```
/usr/bin/lsb_release -d
Red Hat Enterprise Linux Server release 6.4 (Santiago)
```

```
From /etc/*release* /etc/*version*
redhat-release: Red Hat Enterprise Linux Server release 6.4 (Santiago)
system-release: Red Hat Enterprise Linux Server release 6.4 (Santiago)
system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server
```

```
uname -a:
Linux x3650M4 2.6.32-358.18.1.el6.x86_64 #1 SMP Fri Aug 2 17:04:38 EDT 2013
x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 Oct 15 15:34
```

```
SPEC is set to: /home/SPECcpu-new
Filesystem      Type      Size  Used Avail Use% Mounted on
/dev/mapper/vg_x3650m4-lv_home
ext4            313G    203G   94G   69% /home
```

```
Additional information from dmidecode:
BIOS IBM      -[TESTBUILD-1.50]- 08/09/2013
Memory:
 8x Not Specified Not Specified
16x Samsung M393B2G70QH0-CMA 16 GB 1600 MHz 2 rank
```

(End of data from sysinfo program)  
"Not Specified" memory information from dmidecode indicates unused DIMM slots.



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## IBM Corporation

**SPECfp2006 = 84.4**

IBM System x3650 M4  
(Intel Xeon E5-2630 v2, 2.60 GHz)

**SPECfp\_base2006 = 82.1**

**CPU2006 license:** 11  
**Test sponsor:** IBM Corporation  
**Tested by:** IBM Corporation

**Test date:** Oct-2013  
**Hardware Availability:** Nov-2013  
**Software Availability:** Sep-2013

### General Notes

Environment variables set by runspec before the start of the run:  
LD\_LIBRARY\_PATH = "/home/SPECcpu-new/libs/32:/home/SPECcpu-new/libs/64:/home/SPECcpu-new/sh"  
OMP\_NUM\_THREADS = "12"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB memory using RedHat EL 6.4  
Transparent Huge Pages enabled with:  
echo always > /sys/kernel/mm/redhat\_transparent\_hugepage/enabled  
runspec command invoked through numactl i.e.:  
numactl --interleave=all runspec <etc>

### Base Compiler Invocation

C benchmarks:  
icc -m64

C++ benchmarks:  
icpc -m64

Fortran benchmarks:  
ifort -m64

Benchmarks using both Fortran and C:  
icc -m64 ifort -m64

### Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.dealII: -DSPEC\_CPU\_LP64  
450.soplex: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
482.sphinx3: -DSPEC\_CPU\_LP64



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## IBM Corporation

**SPECfp2006 = 84.4**

IBM System x3650 M4  
(Intel Xeon E5-2630 v2, 2.60 GHz)

**SPECfp\_base2006 = 82.1**

**CPU2006 license:** 11  
**Test sponsor:** IBM Corporation  
**Tested by:** IBM Corporation

**Test date:** Oct-2013  
**Hardware Availability:** Nov-2013  
**Software Availability:** Sep-2013

## Base Optimization Flags

C benchmarks:  
-xAVX -ipo -O3 -no-prec-div -parallel -opt-prefetch -ansi-alias

C++ benchmarks:  
-xAVX -ipo -O3 -no-prec-div -opt-prefetch -ansi-alias

Fortran benchmarks:  
-xAVX -ipo -O3 -no-prec-div -parallel -opt-prefetch

Benchmarks using both Fortran and C:  
-xAVX -ipo -O3 -no-prec-div -parallel -opt-prefetch -ansi-alias

## Peak Compiler Invocation

C benchmarks:  
icc -m64

C++ benchmarks:  
icpc -m64

Fortran benchmarks:  
ifort -m64

Benchmarks using both Fortran and C:  
icc -m64 ifort -m64

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

433.milc: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -auto-ilp32  
-ansi-alias

470.lbm: basepeak = yes

482.sphinx3: -xAVX -ipo -O3 -no-prec-div -unroll2 -ansi-alias  
-parallel

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## IBM Corporation

SPECfp2006 = 84.4

IBM System x3650 M4  
(Intel Xeon E5-2630 v2, 2.60 GHz)

SPECfp\_base2006 = 82.1

**CPU2006 license:** 11  
**Test sponsor:** IBM Corporation  
**Tested by:** IBM Corporation

**Test date:** Oct-2013  
**Hardware Availability:** Nov-2013  
**Software Availability:** Sep-2013

## Peak Optimization Flags (Continued)

C++ benchmarks:

444.namd: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -fno-alias  
-auto-ilp32

447.dealIII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2  
-inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2  
-inline-level=0 -opt-prefetch -parallel

465.tonto: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -inline-calloc  
-opt-malloc-options=3 -auto -unroll4

Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

454.calculix: -xAVX -ipo -O3 -no-prec-div -auto-ilp32 -ansi-alias

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.html>  
<http://www.spec.org/cpu2006/flags/IBM-Platform-Flags-V1.2-IVB-A.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.xml>  
<http://www.spec.org/cpu2006/flags/IBM-Platform-Flags-V1.2-IVB-A.xml>



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## IBM Corporation

SPECfp2006 = 84.4

IBM System x3650 M4  
(Intel Xeon E5-2630 v2, 2.60 GHz)

SPECfp\_base2006 = 82.1

**CPU2006 license:** 11  
**Test sponsor:** IBM Corporation  
**Tested by:** IBM Corporation

**Test date:** Oct-2013  
**Hardware Availability:** Nov-2013  
**Software Availability:** Sep-2013

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Thu Jul 24 17:31:11 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 19 November 2013.