



# SPEC<sup>®</sup> CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Fujitsu

SPECfp<sup>®</sup>2006 = **98.1**

PRIMERGY CX250 S2, Intel Xeon E5-2637 v2, 3.50 GHz

SPECfp\_base2006 = **94.7**

CPU2006 license: 19


Test date: Oct-2013

Test sponsor: Fujitsu

Hardware Availability: Sep-2013

Tested by: Fujitsu

Software Availability: Sep-2013

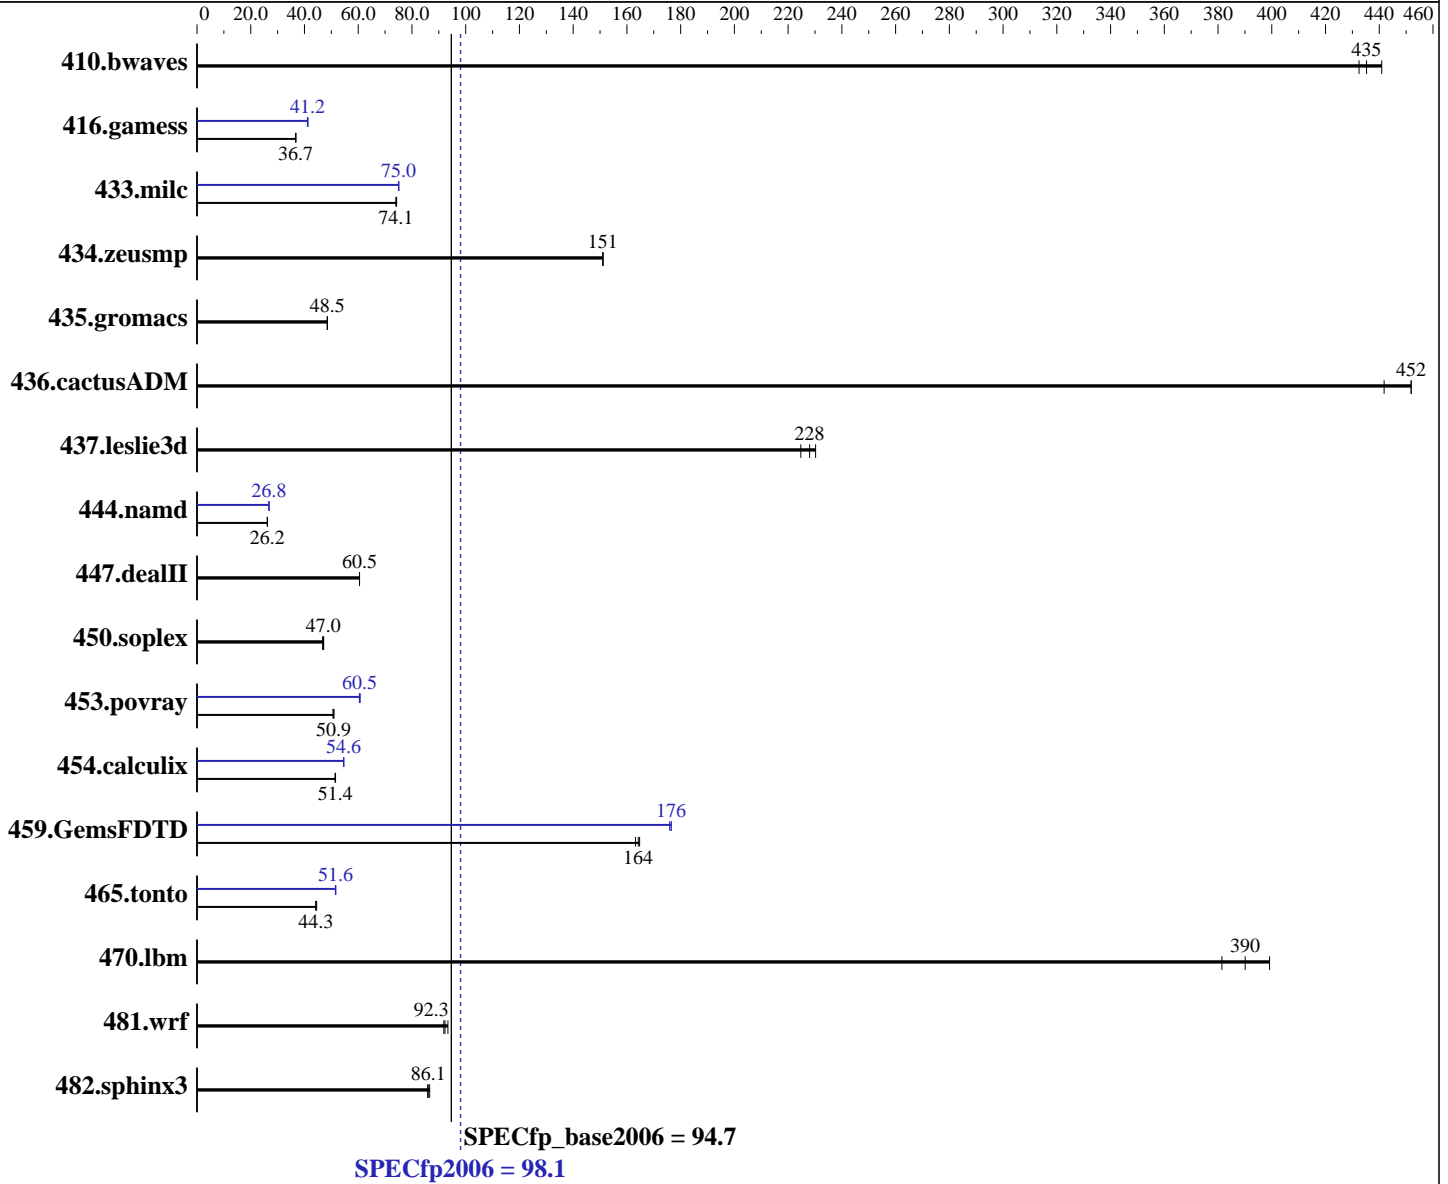

### Hardware

CPU Name: Intel Xeon E5-2637 v2  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.80 GHz  
 CPU MHz: 3500  
 FPU: Integrated  
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip, 2 threads/core  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

### Software

Operating System: Red Hat Enterprise Linux Server release 6.4 (Santiago)  
 2.6.32-358.11.1.el6.x86\_64  
 Compiler: C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux;  
 Fortran: Version 14.0.0.080 of Intel Fortran Studio XE for Linux  
 Auto Parallel: Yes  
 File System: ext4

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Fujitsu

SPECfp2006 = **98.1**

PRIMERGY CX250 S2, Intel Xeon E5-2637 v2, 3.50 GHz

SPECfp\_base2006 = **94.7**

CPU2006 license: 19

Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: Oct-2013

Hardware Availability: Sep-2013

Software Availability: Sep-2013

L3 Cache: 15 MB I+D on chip per chip  
Other Cache: None  
Memory: 128 GB (16 x 8 GB 2Rx8 PC3-14900R-13, ECC)  
Disk Subsystem: 1 x SATA, 500 GB, 7200 RPM  
Other Hardware: None

System State: Run level 5 (multi-user)  
Base Pointers: 64-bit  
Peak Pointers: 32/64-bit  
Other Software: None

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	<u>31.2</u>	<u>435</u>	30.8	441	31.4	432	<u>31.2</u>	<u>435</u>	30.8	441	31.4	432
416.gamess	<u>533</u>	<u>36.7</u>	533	36.7	532	36.8	474	41.3	477	41.1	<u>475</u>	<u>41.2</u>
433.milc	<u>124</u>	<u>74.1</u>	124	74.3	124	74.1	122	75.0	122	75.2	<u>122</u>	<u>75.0</u>
434.zeusmp	60.2	151	60.2	151	<u>60.2</u>	<u>151</u>	60.2	151	60.2	151	<u>60.2</u>	<u>151</u>
435.gromacs	147	48.5	<u>147</u>	<u>48.5</u>	147	48.5	147	48.5	<u>147</u>	<u>48.5</u>	147	48.5
436.cactusADM	<u>26.4</u>	<u>452</u>	27.0	442	26.4	452	<u>26.4</u>	<u>452</u>	27.0	442	26.4	452
437.leslie3d	40.8	230	<u>41.2</u>	<u>228</u>	41.8	225	40.8	230	<u>41.2</u>	<u>228</u>	41.8	225
444.namd	306	26.2	306	26.2	<u>306</u>	<u>26.2</u>	299	26.8	299	26.8	<u>299</u>	<u>26.8</u>
447.dealII	189	60.5	<u>189</u>	<u>60.5</u>	189	60.5	189	60.5	<u>189</u>	<u>60.5</u>	189	60.5
450.soplex	177	47.2	<u>177</u>	<u>47.0</u>	178	46.7	177	47.2	<u>177</u>	<u>47.0</u>	178	46.7
453.povray	105	50.6	<u>105</u>	<u>50.9</u>	104	51.0	87.6	60.8	88.0	60.4	<u>88.0</u>	<u>60.5</u>
454.calculix	160	51.6	<u>160</u>	<u>51.4</u>	160	51.4	<u>151</u>	<u>54.6</u>	151	54.6	151	54.5
459.GemsFDTD	<u>64.6</u>	<u>164</u>	65.0	163	64.4	165	60.3	176	<u>60.1</u>	<u>176</u>	60.1	176
465.tonto	221	44.5	<u>222</u>	<u>44.3</u>	223	44.2	191	51.5	190	51.7	<u>191</u>	<u>51.6</u>
470.lbm	34.4	399	<u>35.2</u>	<u>390</u>	36.0	381	34.4	399	<u>35.2</u>	<u>390</u>	36.0	381
481.wrf	122	91.9	120	93.4	<u>121</u>	<u>92.3</u>	122	91.9	120	93.4	<u>121</u>	<u>92.3</u>
482.sphinx3	<u>226</u>	<u>86.1</u>	227	85.8	225	86.6	<u>226</u>	<u>86.1</u>	227	85.8	225	86.6

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

BIOS configuration:  
Energy Performance = Performance  
Utilization Profile = Unbalanced

## General Notes

Environment variables set by runspec before the start of the run:  
KMP\_AFFINITY = "granularity=fine,compact,1,0"  
LD\_LIBRARY\_PATH = "/SPECcpu2006/libs/32:/SPECcpu2006/libs/64:/SPECcpu2006/sh"

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Fujitsu**

**SPECfp2006 = 98.1**

PRIMERGY CX250 S2, Intel Xeon E5-2637 v2, 3.50 GHz

**SPECfp\_base2006 = 94.7**

**CPU2006 license:** 19

**Test sponsor:** Fujitsu

**Tested by:** Fujitsu

**Test date:** Oct-2013

**Hardware Availability:** Sep-2013

**Software Availability:** Sep-2013

## General Notes (Continued)

OMP\_NUM\_THREADS = "8"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB memory using RedHat EL 6.4

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/redhat\_transparent\_hugepage/enabled

runspec command invoked through numactl i.e.:

numactl --interleave=all runspec <etc>

For information about Fujitsu please visit: <http://www.fujitsu.com>

## Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.dealII: -DSPEC\_CPU\_LP64  
450.soplex: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
482.sphinx3: -DSPEC\_CPU\_LP64



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Fujitsu**

**SPECfp2006 = 98.1**

PRIMERGY CX250 S2, Intel Xeon E5-2637 v2, 3.50 GHz

**SPECfp\_base2006 = 94.7**

**CPU2006 license:** 19

**Test sponsor:** Fujitsu

**Tested by:** Fujitsu

**Test date:** Oct-2013

**Hardware Availability:** Sep-2013

**Software Availability:** Sep-2013

## Base Optimization Flags

C benchmarks:

`-xAVX -ipo -O3 -no-prec-div -parallel -opt-prefetch -ansi-alias`

C++ benchmarks:

`-xAVX -ipo -O3 -no-prec-div -opt-prefetch -ansi-alias`

Fortran benchmarks:

`-xAVX -ipo -O3 -no-prec-div -parallel -opt-prefetch`

Benchmarks using both Fortran and C:

`-xAVX -ipo -O3 -no-prec-div -parallel -opt-prefetch -ansi-alias`

## Peak Compiler Invocation

C benchmarks:

`icc -m64`

C++ benchmarks:

`icpc -m64`

Fortran benchmarks:

`ifort -m64`

Benchmarks using both Fortran and C:

`icc -m64 ifort -m64`

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

433.milc: `-xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -auto-ilp32  
-ansi-alias`

470.lbm: `basepeak = yes`

482.sphinx3: `basepeak = yes`

C++ benchmarks:

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Fujitsu**

**SPECfp2006 = 98.1**

PRIMERGY CX250 S2, Intel Xeon E5-2637 v2, 3.50 GHz

**SPECfp\_base2006 = 94.7**

**CPU2006 license:** 19

**Test date:** Oct-2013

**Test sponsor:** Fujitsu

**Hardware Availability:** Sep-2013

**Tested by:** Fujitsu

**Software Availability:** Sep-2013

## Peak Optimization Flags (Continued)

444.namd: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -fno-alias  
-auto-ilp32

447.dealIII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -ansi-alias

### Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2  
-inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2  
-inline-level=0 -opt-prefetch -parallel

465.tonto: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -inline-calloc  
-opt-malloc-options=3 -auto -unroll4

### Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

454.calculix: -xAVX -ipo -O3 -no-prec-div -auto-ilp32 -ansi-alias

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.html>

<http://www.spec.org/cpu2006/flags/Fujitsu-Platform.20131009.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.xml>

<http://www.spec.org/cpu2006/flags/Fujitsu-Platform.20131009.xml>



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Fujitsu

**SPECfp2006 = 98.1**

PRIMERGY CX250 S2, Intel Xeon E5-2637 v2, 3.50 GHz

**SPECfp\_base2006 = 94.7**

**CPU2006 license:** 19

**Test sponsor:** Fujitsu

**Tested by:** Fujitsu

**Test date:** Oct-2013

**Hardware Availability:** Sep-2013

**Software Availability:** Sep-2013

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Thu Jul 24 18:19:26 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 3 December 2013.