



SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C240 M3 (Intel Xeon E5-2650L v2, 1.70 GHz)

SPECfp[®]_rate2006 = 470

SPECfp_rate_base2006 = 462

CPU2006 license: 9019


Test sponsor: Cisco Systems

Tested by: Cisco Systems

Test date: Dec-2013

Hardware Availability: Dec-2013

Software Availability: Sep-2013

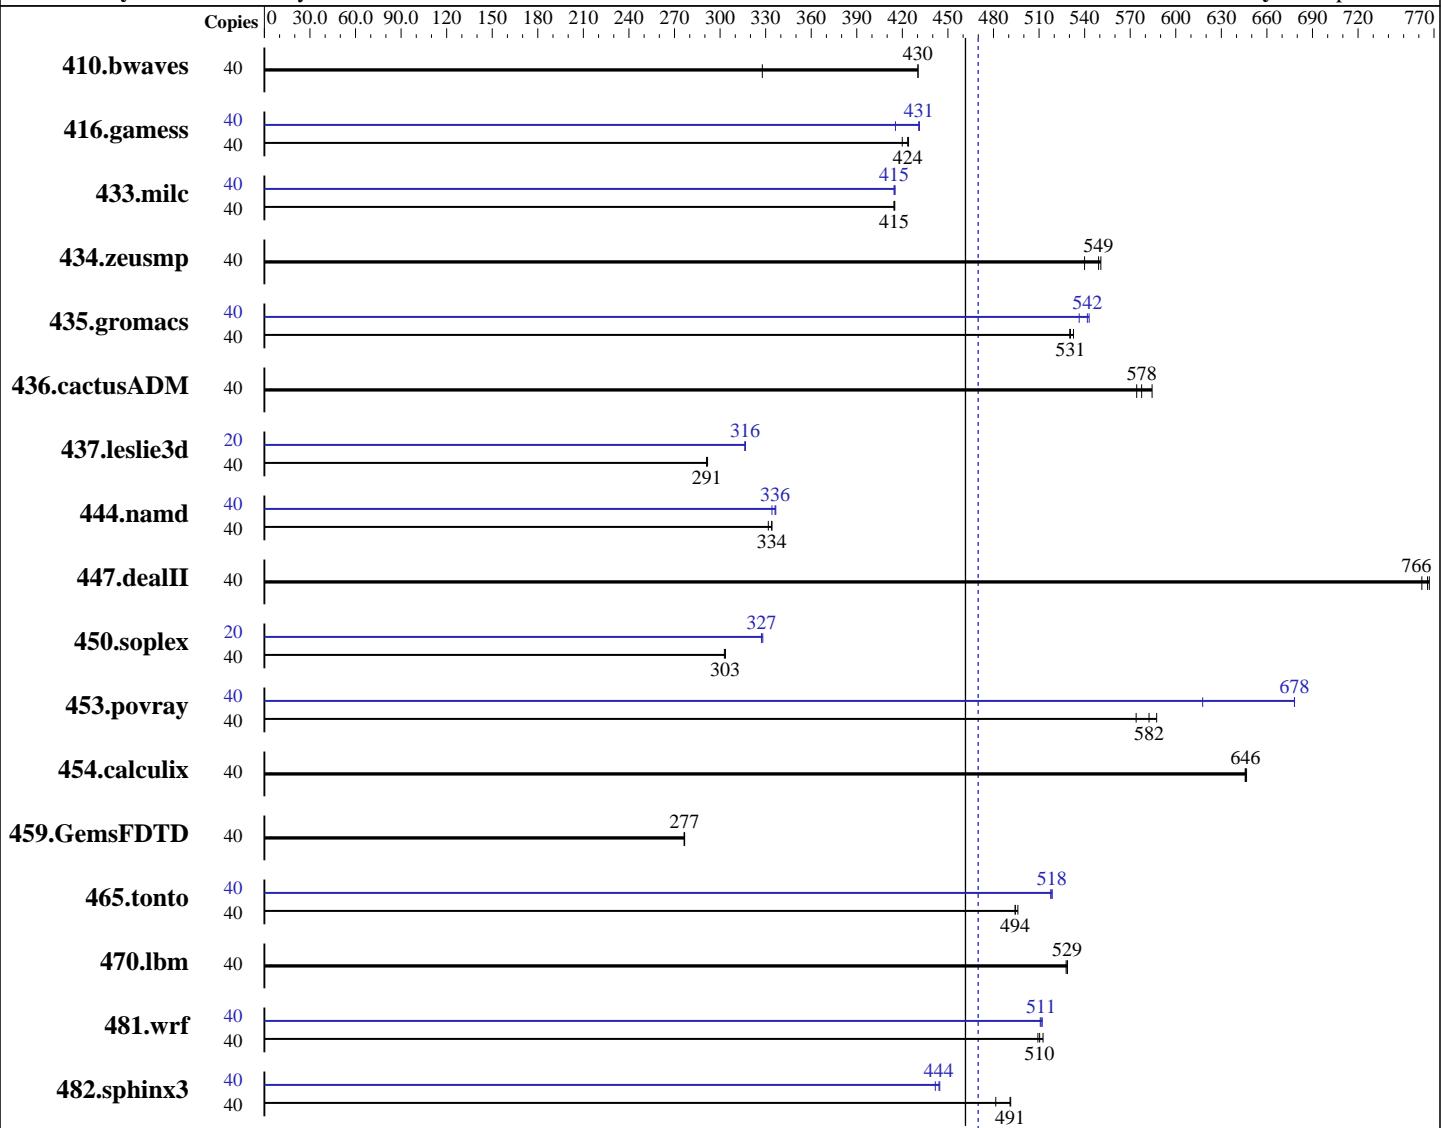

SPECfp_rate_base2006 = 462

SPECfp_rate2006 = 470

Hardware

CPU Name: Intel Xeon E5-2650L v2
CPU Characteristics: Intel Turbo Boost Technology up to 2.10 GHz
CPU MHz: 1700
FPU: Integrated
CPU(s) enabled: 20 cores, 2 chips, 10 cores/chip, 2 threads/core
CPU(s) orderable: 1,2 chip
Primary Cache: 32 KB I + 32 KB D on chip per core
Secondary Cache: 256 KB I+D on chip per core

Continued on next page

Software

Operating System: Red Hat Enterprise Linux Server release 6.4 (Santiago)
Compiler: 2.6.32-358.el6.x86_64
C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux;
Fortran: Version 14.0.0.080 of Intel Fortran Studio XE for Linux
Auto Parallel: No
File System: ext4
Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C240 M3 (Intel Xeon E5-2650L v2, 1.70 GHz)

SPECfp_rate2006 = 470

SPECfp_rate_base2006 = 462

CPU2006 license: 9019

Test date: Dec-2013

Test sponsor: Cisco Systems

Hardware Availability: Dec-2013

Tested by: Cisco Systems

Software Availability: Sep-2013

L3 Cache: 25 MB I+D on chip per chip
 Other Cache: None
 Memory: 128 GB (16 x 8 GB 2Rx4 PC3-14900R-13, ECC, running at 1600 MHz and CL11)
 Disk Subsystem: 1 X 200 GB SSD
 Other Hardware: None

System State: Run level 3 (multi-user)
 Base Pointers: 32/64-bit
 Peak Pointers: 32/64-bit
 Other Software: None

Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	40	1263	430	1658	328	<u>1263</u>	<u>430</u>	40	1263	430	1658	328	<u>1263</u>	<u>430</u>		
416.gamess	40	<u>1849</u>	<u>424</u>	1865	420	1847	424	40	<u>1818</u>	<u>431</u>	1885	415	1816	431		
433.milc	40	885	415	<u>885</u>	<u>415</u>	886	414	40	886	415	884	415	<u>885</u>	<u>415</u>		
434.zeusmp	40	<u>663</u>	<u>549</u>	674	540	661	551	40	<u>663</u>	<u>549</u>	674	540	661	551		
435.gromacs	40	536	533	<u>538</u>	<u>531</u>	539	530	40	<u>527</u>	<u>542</u>	526	543	532	536		
436.cactusADM	40	<u>828</u>	<u>578</u>	818	584	832	574	40	<u>828</u>	<u>578</u>	818	584	832	574		
437.leslie3d	40	<u>1291</u>	<u>291</u>	1291	291	1289	292	20	594	317	<u>594</u>	<u>316</u>	594	316		
444.namd	40	960	334	967	332	<u>961</u>	<u>334</u>	40	960	334	953	337	<u>954</u>	<u>336</u>		
447.dealII	40	597	767	<u>598</u>	<u>766</u>	601	762	40	597	767	<u>598</u>	<u>766</u>	601	762		
450.soplex	40	1099	304	1102	303	<u>1100</u>	<u>303</u>	20	510	327	508	328	<u>510</u>	<u>327</u>		
453.povray	40	362	587	371	574	<u>365</u>	<u>582</u>	40	314	678	<u>314</u>	<u>678</u>	344	618		
454.calculix	40	<u>511</u>	<u>646</u>	510	647	511	646	40	<u>511</u>	<u>646</u>	510	647	511	646		
459.GemsFDTD	40	1536	276	1534	277	<u>1534</u>	<u>277</u>	40	1536	276	1534	277	<u>1534</u>	<u>277</u>		
465.tonto	40	793	496	796	494	<u>796</u>	<u>494</u>	40	759	519	760	518	<u>759</u>	<u>518</u>		
470.lbm	40	1040	529	<u>1040</u>	<u>529</u>	1041	528	40	1040	529	<u>1040</u>	<u>529</u>	1041	528		
481.wrf	40	877	509	872	513	<u>875</u>	<u>510</u>	40	872	512	<u>874</u>	<u>511</u>	875	511		
482.sphinx3	40	1587	491	1619	482	<u>1588</u>	<u>491</u>	40	1765	442	<u>1755</u>	<u>444</u>	1753	445		

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C240 M3 (Intel Xeon E5-2650L v2, 1.70 GHz)

SPECfp_rate2006 = 470

SPECfp_rate_base2006 = 462

CPU2006 license: 9019

Test date: Dec-2013

Test sponsor: Cisco Systems

Hardware Availability: Dec-2013

Tested by: Cisco Systems

Software Availability: Sep-2013

Platform Notes

BIOS Settings:

```
Intel HT Technology = Enabled
CPU performance set to HPC
Power Technology set to Custom
CPU Power State C6 set to Enabled
CPU Power State C1 Enhanced set to Disabled
Energy Performance policy set to Performance
Memory RAS configuration set to Maximum Performance
DRAM Clock Throttling Set to Performance
LV DDR Mode set to Performance-mode
DRAM Refresh Rate Set to 1x
Sysinfo program /opt/cpu2006-1.2/config/sysinfo.rev6818
$Rev: 6818 $ $Date:: 2012-07-17 #$ e86d102572650a6e4d596a3cee98f191
running on localhost.localdomain Fri Dec 20 02:51:08 2013
```

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E5-2650L v2 @ 1.70GHz
        2 "physical id"s (chips)
        40 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
        cpu cores : 10
        siblings : 20
        physical 0: cores 0 1 2 3 4 8 9 10 11 12
        physical 1: cores 0 1 2 3 4 8 9 10 11 12
cache size : 25600 KB
```

```
From /proc/meminfo
MemTotal:      132123304 kB
HugePages_Total:       0
Hugepagesize:     2048 kB
```

```
/usr/bin/lsb_release -d
Red Hat Enterprise Linux Server release 6.4 (Santiago)
```

```
From /etc/*release* /etc/*version*
redhat-release: Red Hat Enterprise Linux Server release 6.4 (Santiago)
system-release: Red Hat Enterprise Linux Server release 6.4 (Santiago)
system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server
```

```
uname -a:
Linux localhost.localdomain 2.6.32-358.el6.x86_64 #1 SMP Tue Jan 29 11:47:41
EST 2013 x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 Dec 20 02:49
```

SPEC is set to: /opt/cpu2006-1.2 Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C240 M3 (Intel Xeon E5-2650L v2, 1.70 GHz)

SPECfp_rate2006 = 470

SPECfp_rate_base2006 = 462

CPU2006 license: 9019

Test date: Dec-2013

Test sponsor: Cisco Systems

Hardware Availability: Dec-2013

Tested by: Cisco Systems

Software Availability: Sep-2013

Platform Notes (Continued)

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sda1	ext4	182G	86G	88G	50%	/

Additional information from dmidecode:

BIOS Cisco Systems, Inc. C240M3.1.5.3b.0.082020130616 08/20/2013
Memory:
16x 0xAD00 HMT31GR7EFR4C-RD 8 GB 1600 MHz 2 rank
8x NO DIMM NO DIMM

(End of data from sysinfo program)

General Notes

Environment variables set by runspec before the start of the run:

LD_LIBRARY_PATH = "/opt/cpu2006-1.2/libs/32:/opt/cpu2006-1.2/libs/64:/opt/cpu2006-1.2/sh"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB memory using RedHat EL 6.4

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled
Filesystem page cache cleared with:
echo 1> /proc/sys/vm/drop_caches
runspec command invoked through numactl i.e.:
numactl --interleave=all runspec <etc>

Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64

416.gamess: -DSPEC_CPU_LP64

433.milc: -DSPEC_CPU_LP64

434.zeusmp: -DSPEC_CPU_LP64

435.gromacs: -DSPEC_CPU_LP64 -nofor_main

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C240 M3 (Intel Xeon E5-2650L v2, 1.70 GHz)

SPECfp_rate2006 = 470

SPECfp_rate_base2006 = 462

CPU2006 license: 9019

Test date: Dec-2013

Test sponsor: Cisco Systems

Hardware Availability: Dec-2013

Tested by: Cisco Systems

Software Availability: Sep-2013

Base Portability Flags (Continued)

```
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main  
437.leslie3d: -DSPEC_CPU_LP64  
    444.namd: -DSPEC_CPU_LP64  
    447.dealII: -DSPEC_CPU_LP64  
    450.soplex: -DSPEC_CPU_LP64  
    453.povray: -DSPEC_CPU_LP64  
    454.calculix: -DSPEC_CPU_LP64 -nofor_main  
459.GemsFDTD: -DSPEC_CPU_LP64  
    465.tonto: -DSPEC_CPU_LP64  
    470.lbm: -DSPEC_CPU_LP64  
    481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX  
482.sphinx3: -DSPEC_CPU_LP64
```

Base Optimization Flags

C benchmarks:

```
-xAVX -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -ansi-alias  
-opt-mem-layout-trans=3
```

C++ benchmarks:

```
-xAVX -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -ansi-alias  
-opt-mem-layout-trans=3
```

Fortran benchmarks:

```
-xAVX -ipo -O3 -no-prec-div -opt-prefetch
```

Benchmarks using both Fortran and C:

```
-xAVX -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -ansi-alias  
-opt-mem-layout-trans=3
```

Peak Compiler Invocation

C benchmarks (except as noted below):

```
icc -m64
```

482.sphinx3: icc -m32

C++ benchmarks (except as noted below):

```
icpc -m64
```

450.soplex: icpc -m32

Fortran benchmarks:

```
ifort -m64
```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C240 M3 (Intel Xeon E5-2650L v2, 1.70 GHz)

SPECfp_rate2006 = 470

SPECfp_rate_base2006 = 462

CPU2006 license: 9019

Test sponsor: Cisco Systems

Tested by: Cisco Systems

Test date: Dec-2013

Hardware Availability: Dec-2013

Software Availability: Sep-2013

Peak Compiler Invocation (Continued)

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

433.milc: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
-prof-use(pass 2) -auto-ilp32

470.lbm: basepeak = yes

482.sphinx3: -xAVX -ipo -O3 -no-prec-div -opt-mem-layout-trans=3
-unroll12

C++ benchmarks:

444.namd: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
-prof-use(pass 2) -fno-alias -auto-ilp32

447.dealII: basepeak = yes

450.soplex: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
-prof-use(pass 2) -opt-malloc-options=3

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C240 M3 (Intel Xeon E5-2650L v2, 1.70 GHz)

SPECfp_rate2006 = 470

SPECfp_rate_base2006 = 462

CPU2006 license: 9019

Test sponsor: Cisco Systems

Tested by: Cisco Systems

Test date: Dec-2013

Hardware Availability: Dec-2013

Software Availability: Sep-2013

Peak Optimization Flags (Continued)

453.povray: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
-prof-use(pass 2) -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2
-inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: -xAVX -ipo -O3 -no-prec-div -opt-prefetch

459.GemsFDTD: basepeak = yes

465.tonto: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -auto
-inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
-prof-use(pass 2) -opt-prefetch -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: -xAVX -ipo -O3 -no-prec-div -auto-ilp32

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.html>
<http://www.spec.org/cpu2006/flags/Cisco-Platform-Settings-V1.2.20130717.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.xml>
<http://www.spec.org/cpu2006/flags/Cisco-Platform-Settings-V1.2.20130717.xml>



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C240 M3 (Intel Xeon E5-2650L v2, 1.70 GHz)

SPECfp_rate2006 = 470

SPECfp_rate_base2006 = 462

CPU2006 license: 9019

Test date: Dec-2013

Test sponsor: Cisco Systems

Hardware Availability: Dec-2013

Tested by: Cisco Systems

Software Availability: Sep-2013

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.

Report generated on Thu Jul 24 21:05:31 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 28 January 2014.