



# SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Sugon**

**SPECfp®\_rate2006 = 388**

I620-G15 (Intel Xeon E5-2637 v2, 3.50 GHz)

**SPECfp\_rate\_base2006 = 383**

CPU2006 license: 9046


Test date: Jan-2014

Test sponsor: Sugon

Hardware Availability: Jan-2014

Tested by: Sugon

Software Availability: Jan-2014

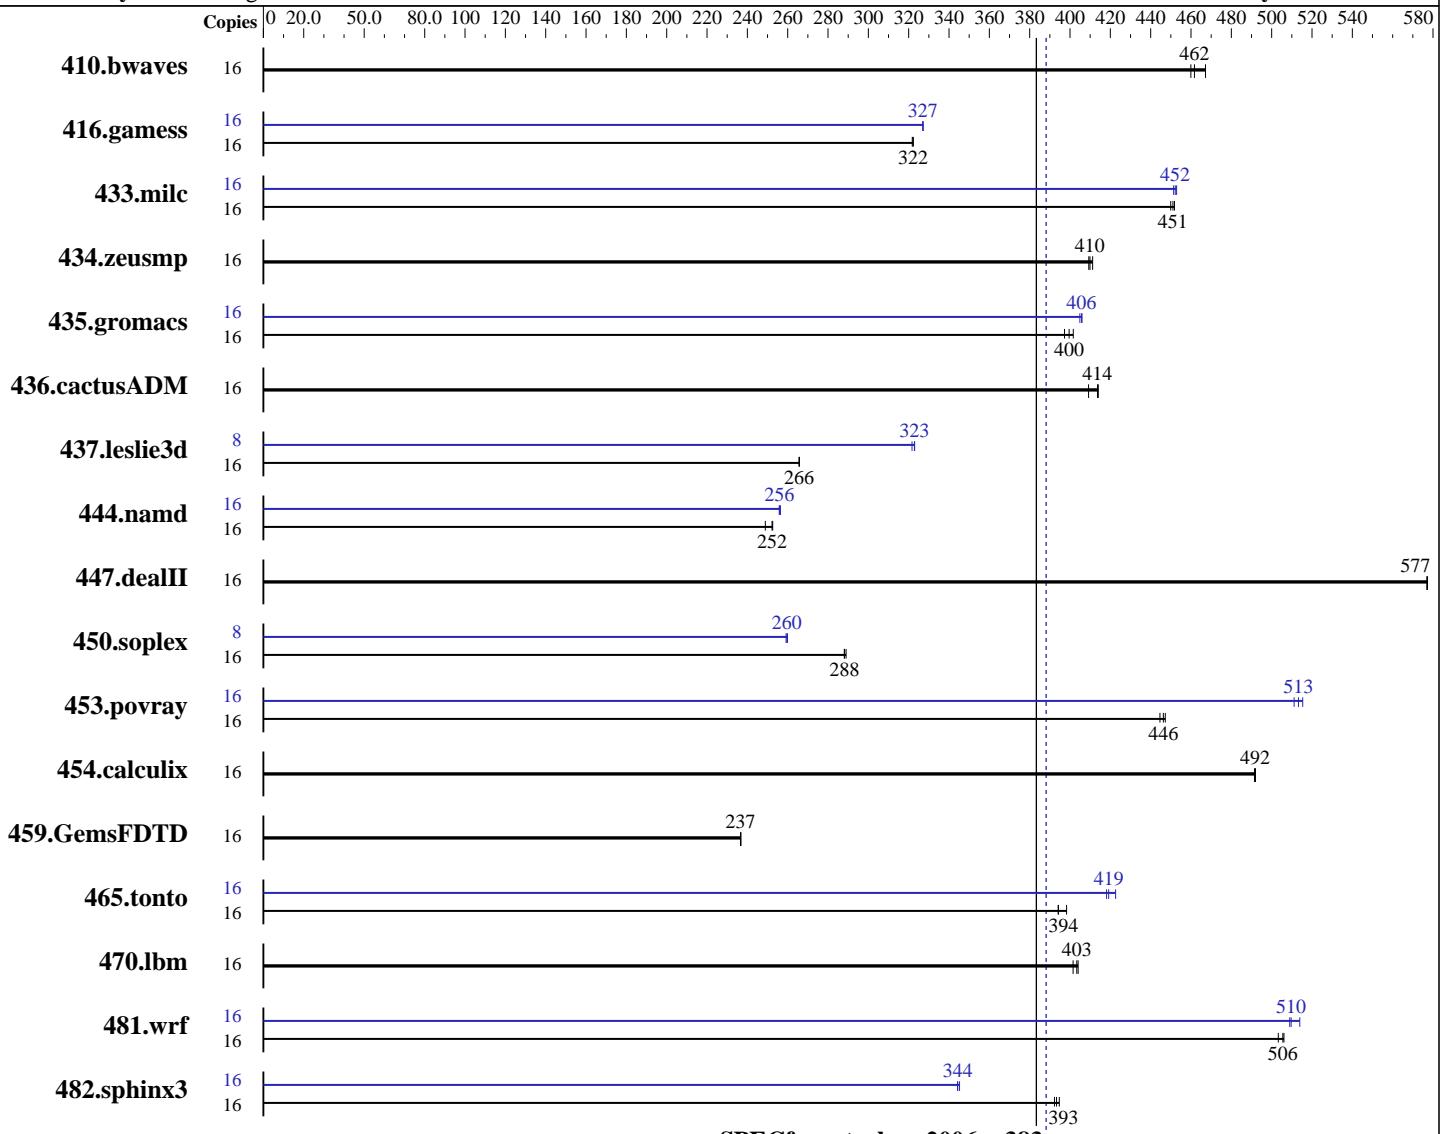

**SPECfp\_rate\_base2006 = 383**

**SPECfp\_rate2006 = 388**

## Hardware

CPU Name: Intel Xeon E5-2637 v2  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.80 GHz  
 CPU MHz: 3500  
 FPU: Integrated  
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip, 2 threads/core  
 CPU(s) orderable: 1,2 chip  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

## Software

Operating System: Red Hat Enterprise Linux Server release 6.4 (Santiago)  
 Compiler: 2.6.32-358.el6.x86\_64  
 C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux;  
 Fortran: Version 14.0.0.080 of Intel Fortran Studio XE for Linux  
 Auto Parallel: No  
 File System: ext4  
 Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Sugon**

**SPECfp\_rate2006 = 388**

I620-G15 (Intel Xeon E5-2637 v2, 3.50 GHz)

**SPECfp\_rate\_base2006 = 383**

**CPU2006 license:** 9046

**Test date:** Jan-2014

**Test sponsor:** Sugon

**Hardware Availability:** Jan-2014

**Tested by:** Sugon

**Software Availability:** Jan-2014

L3 Cache: 15 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 256 GB (16 x 16 GB 2Rx4 PC3-14900R-13, ECC)  
 Disk Subsystem: 1 X 2 TB SATA 7200 RPM, RAID 0  
 Other Hardware: None

System State: Run level 3 (Full multiuser with network)  
 Base Pointers: 32/64-bit  
 Peak Pointers: 32/64-bit  
 Other Software: None

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	16	<b>471</b>	<b>462</b>	473	460	465	467	16	<b>471</b>	<b>462</b>	473	460	465	467
416.gamess	16	<b>972</b>	<b>322</b>	974	322	972	322	16	958	327	<b>958</b>	<b>327</b>	958	327
433.milc	16	326	450	<b>326</b>	<b>451</b>	325	452	16	325	451	324	453	<b>325</b>	<b>452</b>
434.zeusmp	16	356	409	<b>355</b>	<b>410</b>	354	411	16	356	409	<b>355</b>	<b>410</b>	354	411
435.gromacs	16	284	402	<b>286</b>	<b>400</b>	288	397	16	281	406	<b>282</b>	<b>406</b>	282	405
436.cactusADM	16	<b>462</b>	<b>414</b>	462	414	467	409	16	<b>462</b>	<b>414</b>	462	414	467	409
437.leslie3d	16	<b>566</b>	<b>266</b>	566	266	566	266	8	234	322	<b>233</b>	<b>323</b>	233	323
444.namd	16	516	249	508	253	<b>509</b>	<b>252</b>	16	502	256	<b>501</b>	<b>256</b>	500	256
447.dealII	16	<b>317</b>	<b>577</b>	317	577	317	577	16	<b>317</b>	<b>577</b>	317	577	317	577
450.soplex	16	463	288	<b>463</b>	<b>288</b>	462	289	8	<b>257</b>	<b>260</b>	257	259	257	260
453.povray	16	<b>191</b>	<b>446</b>	190	447	191	445	16	167	511	165	515	<b>166</b>	<b>513</b>
454.calculix	16	269	491	<b>268</b>	<b>492</b>	268	492	16	269	491	<b>268</b>	<b>492</b>	268	492
459.GemsFDTD	16	<b>717</b>	<b>237</b>	717	237	717	237	16	<b>717</b>	<b>237</b>	717	237	717	237
465.tonto	16	395	398	<b>399</b>	<b>394</b>	399	394	16	377	418	373	423	<b>376</b>	<b>419</b>
470.lbm	16	548	402	544	404	<b>545</b>	<b>403</b>	16	548	402	544	404	<b>545</b>	<b>403</b>
481.wrf	16	355	503	353	506	<b>354</b>	<b>506</b>	16	348	514	351	509	<b>351</b>	<b>510</b>
482.sphinx3	16	795	392	790	395	<b>793</b>	<b>393</b>	16	903	345	906	344	<b>906</b>	<b>344</b>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

BIOS Configuration:  
 Intel Virtualization technology set to disabled  
 Power Technology set to performance

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Sugon

I620-G15 (Intel Xeon E5-2637 v2, 3.50 GHz)

**SPECfp\_rate2006 = 388**

CPU2006 license: 9046

Test date: Jan-2014

Test sponsor: Sugon

Hardware Availability: Jan-2014

Tested by: Sugon

Software Availability: Jan-2014

## Platform Notes (Continued)

```
Turbo boost set to enabled
DDR Speed set to force 1866
Sysinfo program /home/cpu2006/config/sysinfo.rev6874
$Rev: 6874 $ $Date:: 2013-11-20 ## 654bd3fcf53b06faef0efe54ed011998
running on cpu2006 Wed Jan  8 05:12:52 2014
```

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:  
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E5-2637 v2 @ 3.50GHz
        2 "physical id"s (chips)
        16 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
        cpu cores : 4
        siblings : 8
        physical 0: cores 1 2 3 4
        physical 1: cores 1 2 3 4
cache size : 15360 KB
```

```
From /proc/meminfo
MemTotal:      264504588 kB
HugePages_Total:      0
Hugepagesize:     2048 kB
```

```
/usr/bin/lsb_release -d
Red Hat Enterprise Linux Server release 6.4 (Santiago)
```

```
From /etc/*release* /etc/*version*
redhat-release: Red Hat Enterprise Linux Server release 6.4 (Santiago)
system-release: Red Hat Enterprise Linux Server release 6.4 (Santiago)
system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server
```

```
uname -a:
Linux cpu2006 2.6.32-358.el6.x86_64 #1 SMP Tue Jan 29 11:47:41 EST 2013
x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 Jan 7 20:08
```

```
SPEC is set to: /home/cpu2006
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/mapper/vg_cpu2006-lv_home
                  ext4   1.8T   98G  1.6T   6%  /home
```

Additional information from dmidecode:

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Sugon**

I620-G15 (Intel Xeon E5-2637 v2, 3.50 GHz)

**SPECfp\_rate2006 = 388**

**CPU2006 license:** 9046

**Test date:** Jan-2014

**Test sponsor:** Sugon

**Hardware Availability:** Jan-2014

**Tested by:** Sugon

**Software Availability:** Jan-2014

## Platform Notes (Continued)

BIOS American Megatrends Inc. V8.100A 10/31/2013

Memory:

16x Hynix Semiconductor HMT42GR7AFR4C-RD 16 GB 1 rank 1866 MHz

(End of data from sysinfo program)

## General Notes

Environment variables set by runspec before the start of the run:

LD\_LIBRARY\_PATH = "/home/cpu2006/libs/32:/home/cpu2006/libs/64:/home/cpu2006/sh"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB memory using RedHat EL 6.4

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/redhat\_transparent\_hugepage/enabled

Filesystem page cache cleared with:

echo 1> /proc/sys/vm/drop\_caches

runspec command invoked through numactl i.e.:

numactl --interleave=all runspec <etc>

## Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.dealII: -DSPEC\_CPU\_LP64

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Sugon

I620-G15 (Intel Xeon E5-2637 v2, 3.50 GHz)

**SPECfp\_rate2006 = 388**

CPU2006 license: 9046

Test date: Jan-2014

Test sponsor: Sugon

Hardware Availability: Jan-2014

Tested by: Sugon

Software Availability: Jan-2014

## Base Portability Flags (Continued)

```
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64
```

## Base Optimization Flags

C benchmarks:

```
-xAVX -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -ansi-alias
-opt-mem-layout-trans=3
```

C++ benchmarks:

```
-xAVX -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -ansi-alias
-opt-mem-layout-trans=3
```

Fortran benchmarks:

```
-xAVX -ipo -O3 -no-prec-div -opt-prefetch
```

Benchmarks using both Fortran and C:

```
-xAVX -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -ansi-alias
-opt-mem-layout-trans=3
```

## Peak Compiler Invocation

C benchmarks (except as noted below):

```
icc -m64
```

482.sphinx3: icc -m32

C++ benchmarks (except as noted below):

```
icpc -m64
```

450.soplex: icpc -m32

Fortran benchmarks:

```
ifort -m64
```

Benchmarks using both Fortran and C:

```
icc -m64 ifort -m64
```



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Sugon**

I620-G15 (Intel Xeon E5-2637 v2, 3.50 GHz)

**SPECfp\_rate2006 = 388**

**CPU2006 license:** 9046

**Test date:** Jan-2014

**Test sponsor:** Sugon

**Hardware Availability:** Jan-2014

**Tested by:** Sugon

**Software Availability:** Jan-2014

## Peak Portability Flags

```
410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
    433.milc: -DSPEC_CPU_LP64
    434.zeusmp: -DSPEC_CPU_LP64
    435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
    444.namd: -DSPEC_CPU_LP64
    447.dealII: -DSPEC_CPU_LP64
    453.povray: -DSPEC_CPU_LP64
    454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
    465.tonto: -DSPEC_CPU_LP64
    470.lbm: -DSPEC_CPU_LP64
    481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
```

## Peak Optimization Flags

C benchmarks:

```
433.milc: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
    -no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
    -prof-use(pass 2) -auto-ilp32
```

470.lbm: basepeak = yes

```
482.sphinx3: -xAVX -ipo -O3 -no-prec-div -opt-mem-layout-trans=3
    -unroll2
```

C++ benchmarks:

```
444.namd: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
    -no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
    -prof-use(pass 2) -fno-alias -auto-ilp32
```

447.dealII: basepeak = yes

```
450.soplex: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
    -no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
    -prof-use(pass 2) -opt-malloc-options=3
```

```
453.povray: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
    -no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
    -prof-use(pass 2) -unroll4 -ansi-alias
```

Fortran benchmarks:

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Sugon

I620-G15 (Intel Xeon E5-2637 v2, 3.50 GHz)

**SPECfp\_rate2006 = 388**

**CPU2006 license:** 9046

**Test date:** Jan-2014

**Test sponsor:** Sugon

**Hardware Availability:** Jan-2014

**Tested by:** Sugon

**Software Availability:** Jan-2014

## Peak Optimization Flags (Continued)

410.bwaves: basepeak = yes

416.gamess: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2  
-inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: -xAVX -ipo -O3 -no-prec-div -opt-prefetch

459.GemsFDTD: basepeak = yes

465.tonto: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll14 -auto  
-inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)  
-prof-use(pass 2) -opt-prefetch -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: -xAVX -ipo -O3 -no-prec-div -auto-ilp32

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.html>  
<http://www.spec.org/cpu2006/flags/Sugon-Platform-Settings-V1.2-IVB.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.xml>  
<http://www.spec.org/cpu2006/flags/Sugon-Platform-Settings-V1.2-IVB.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.

Report generated on Thu Jul 24 21:04:07 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 28 January 2014.