



SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp®2006 = 76.0

PowerEdge R520 (Intel Xeon E5-2430 v2, 2.50 GHz)

SPECfp_base2006 = 73.2

CPU2006 license: 55


Test date: Oct-2013

Test sponsor: Dell Inc.

Hardware Availability: Jan-2014

Tested by: Dell Inc.

Software Availability: Sep-2013

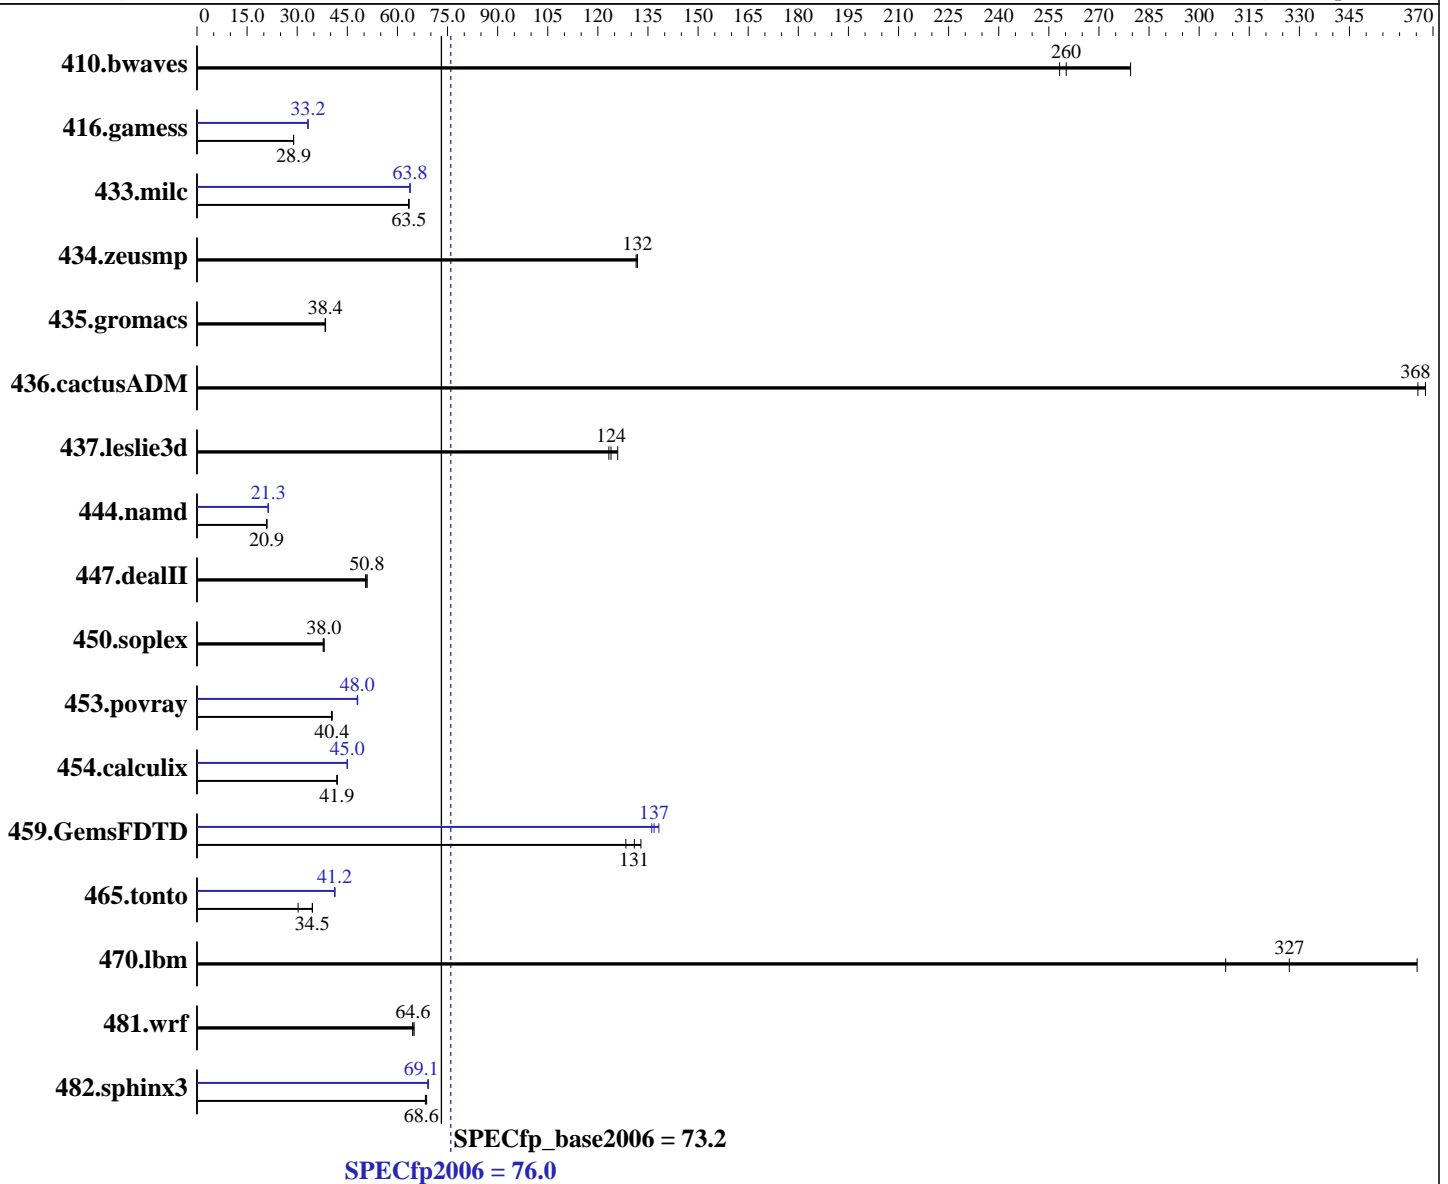

Hardware

CPU Name: Intel Xeon E5-2430 v2
 CPU Characteristics: Intel Turbo Boost Technology up to 3.00 GHz
 CPU MHz: 2500
 FPU: Integrated
 CPU(s) enabled: 12 cores, 2 chips, 6 cores/chip
 CPU(s) orderable: 1,2 chip
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

Software

Operating System: SUSE Linux Enterprise Server 11 (x86_64)
 3.0.76-0.11-default
 Compiler: C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux;
 Fortran: Version 14.0.0.080 of Intel Fortran Studio XE for Linux
 Auto Parallel: Yes
 File System: ext2
 System State: Run level 3 (multi-user)

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp2006 = 76.0

PowerEdge R520 (Intel Xeon E5-2430 v2, 2.50 GHz)

SPECfp_base2006 = 73.2

CPU2006 license: 55

Test date: Oct-2013

Test sponsor: Dell Inc.

Hardware Availability: Jan-2014

Tested by: Dell Inc.

Software Availability: Sep-2013

L3 Cache: 15 MB I+D on chip per chip
 Other Cache: None
 Memory: 192 GB (12 x 16 GB 2Rx4 PC3L-12800R-11, ECC)
 Disk Subsystem: 1 x 300 GB 15000 RPM SAS
 Other Hardware: None

Base Pointers: 64-bit
 Peak Pointers: 32/64-bit
 Other Software: None

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	<u>52.2</u>	260	52.6	258	48.6	279	<u>52.2</u>	260	52.6	258	48.6	279
416.gamess	678	<u>28.9</u>	678	28.9	676	29.0	<u>589</u>	33.2	590	33.2	589	33.2
433.milc	145	63.5	145	63.5	145	63.3	144	63.8	144	63.7	144	63.8
434.zeusmp	69.2	131	69.0	132	69.0	132	69.2	131	69.0	132	69.0	132
435.gromacs	186	38.5	186	38.4	186	38.4	186	38.5	186	38.4	186	38.4
436.cactusADM	32.7	365	<u>32.5</u>	368	32.5	368	32.7	365	<u>32.5</u>	368	32.5	368
437.leslie3d	74.6	126	75.8	124	76.2	123	74.6	126	75.8	124	76.2	123
444.namd	384	20.9	384	20.9	384	20.9	376	21.3	376	21.3	376	21.3
447.dealII	225	50.9	227	50.4	<u>225</u>	50.8	225	50.9	227	50.4	<u>225</u>	50.8
450.soplex	<u>219</u>	38.0	221	37.8	219	38.0	<u>219</u>	38.0	221	37.8	219	38.0
453.povray	132	40.4	131	40.5	132	40.3	111	48.0	111	48.0	111	48.1
454.calculix	196	42.0	197	41.9	197	41.9	183	45.0	183	45.0	183	45.0
459.GemsFDTD	81.0	131	82.6	128	79.8	133	76.7	138	77.9	136	77.5	137
465.tonto	285	34.5	325	30.3	285	34.5	239	41.1	238	41.3	239	41.2
470.lbm	37.6	365	42.0	327	44.6	308	37.6	365	42.0	327	44.6	308
481.wrf	172	65.0	173	64.6	173	64.6	172	65.0	173	64.6	173	64.6
482.sphinx3	285	68.4	284	68.7	284	68.6	282	69.1	281	69.3	282	69.1

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

BIOS settings:
 Virtualization Technology disabled
 Execute Disable disabled
 Logical Processor disabled
 System Profile set to Performance
 Sysinfo program /root/cpu2006-1.2/config/sysinfo.rev6818
 \$Rev: 6818 \$ \$Date:: 2012-07-17 #\$ e86d102572650a6e4d596a3cee98f191
 running on linux Thu Oct 24 04:37:38 2013

This section contains SUT (System Under Test) info as seen by
Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp2006 = 76.0

PowerEdge R520 (Intel Xeon E5-2430 v2, 2.50 GHz)

SPECfp_base2006 = 73.2

CPU2006 license: 55

Test date: Oct-2013

Test sponsor: Dell Inc.

Hardware Availability: Jan-2014

Tested by: Dell Inc.

Software Availability: Sep-2013

Platform Notes (Continued)

some common utilities. To remove or add to this section, see:
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```

From /proc/cpuinfo
  model name : Intel(R) Xeon(R) CPU E5-2430 v2 @ 2.50GHz
  2 "physical id"s (chips)
  12 "processors"
  cores, siblings (Caution: counting these is hw and system dependent. The
  following excerpts from /proc/cpuinfo might not be reliable. Use with
  caution.)
    cpu cores : 6
    siblings  : 6
    physical 0: cores 0 1 2 3 4 5
    physical 1: cores 0 1 2 3 4 5
  cache size : 15360 KB

```

```

From /proc/meminfo
MemTotal:      198410440 kB
HugePages_Total:    0
Hugepagesize:    2048 kB

```

```

/usr/bin/lsb_release -d
SUSE Linux Enterprise Server 11 (x86_64)

```

```

From /etc/*release* /etc/*version*
SuSE-release:
SUSE Linux Enterprise Server 11 (x86_64)
VERSION = 11
PATCHLEVEL = 3

```

```

uname -a:
Linux linux 3.0.76-0.11-default #1 SMP Fri Jun 14 08:21:43 UTC 2013 (ccab990)
x86_64 x86_64 x86_64 GNU/Linux

```

run-level 3 Oct 23 22:10 last=S

```

SPEC is set to: /root/cpu2006-1.2
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda2       ext2  267G  9.4G  257G   4% /

```

```

Additional information from dmidecode:
BIOS Dell Inc. 2.0.21 09/23/2013
Memory:
 1x 00AD00B300AD HMT42GR7MFR4A-PB 16 GB 1600 MHz
11x 00AD04B300AD HMT42GR7AFR4A-PB 16 GB 1600 MHz

```

(End of data from sysinfo program)



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp2006 = 76.0

PowerEdge R520 (Intel Xeon E5-2430 v2, 2.50 GHz)

SPECfp_base2006 = 73.2

CPU2006 license: 55

Test date: Oct-2013

Test sponsor: Dell Inc.

Hardware Availability: Jan-2014

Tested by: Dell Inc.

Software Availability: Sep-2013

General Notes

Environment variables set by runspec before the start of the run:

LD_LIBRARY_PATH = "/root/cpu2006-1.2/libs/32:/root/cpu2006-1.2/libs/64:/root/cpu2006-1.2/sh"
OMP_NUM_THREADS = "12"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB memory using RedHat EL 6.4

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled

Filesystem page cache cleared with:

echo 1> /proc/sys/vm/drop_caches

runspec command invoked through numactl i.e.:

numactl --interleave=all runspec <etc>

Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp2006 = 76.0

PowerEdge R520 (Intel Xeon E5-2430 v2, 2.50 GHz)

SPECfp_base2006 = 73.2

CPU2006 license: 55

Test date: Oct-2013

Test sponsor: Dell Inc.

Hardware Availability: Jan-2014

Tested by: Dell Inc.

Software Availability: Sep-2013

Base Optimization Flags

C benchmarks:

-xAVX -ipo -O3 -no-prec-div -parallel -opt-prefetch -ansi-alias

C++ benchmarks:

-xAVX -ipo -O3 -no-prec-div -opt-prefetch -ansi-alias

Fortran benchmarks:

-xAVX -ipo -O3 -no-prec-div -parallel -opt-prefetch

Benchmarks using both Fortran and C:

-xAVX -ipo -O3 -no-prec-div -parallel -opt-prefetch -ansi-alias

Peak Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

433.milc: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -auto-ilp32
-ansi-alias

470.lbm: basepeak = yes

482.sphinx3: -xAVX -ipo -O3 -no-prec-div -unroll2 -ansi-alias
-parallel

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp2006 = 76.0

PowerEdge R520 (Intel Xeon E5-2430 v2, 2.50 GHz)

SPECfp_base2006 = 73.2

CPU2006 license: 55

Test date: Oct-2013

Test sponsor: Dell Inc.

Hardware Availability: Jan-2014

Tested by: Dell Inc.

Software Availability: Sep-2013

Peak Optimization Flags (Continued)

C++ benchmarks:

444.namd: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -fno-alias
-auto-ilp32

447.dealIII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2
-inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2
-inline-level=0 -opt-prefetch -parallel

465.tonto: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -inline-calloc
-opt-malloc-options=3 -auto -unroll4

Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

454.calculix: -xAVX -ipo -O3 -no-prec-div -auto-ilp32 -ansi-alias

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.html>

<http://www.spec.org/cpu2006/flags/Dell-Platform-Settings-V1.2-revB.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.xml>

<http://www.spec.org/cpu2006/flags/Dell-Platform-Settings-V1.2-revB.xml>



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp2006 = 76.0

PowerEdge R520 (Intel Xeon E5-2430 v2, 2.50 GHz)

SPECfp_base2006 = 73.2

CPU2006 license: 55

Test date: Oct-2013

Test sponsor: Dell Inc.

Hardware Availability: Jan-2014

Tested by: Dell Inc.

Software Availability: Sep-2013

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Thu Jul 24 20:58:04 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 28 January 2014.