



SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

IBM BladeCenter HS23
(Intel Xeon E5-2697 v2, 2.70 GHz)

SPECfp®_rate2006 = 649

SPECfp_rate_base2006 = 631

CPU2006 license: 11


Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: Oct-2013

Hardware Availability: Dec-2013

Software Availability: Sep-2013

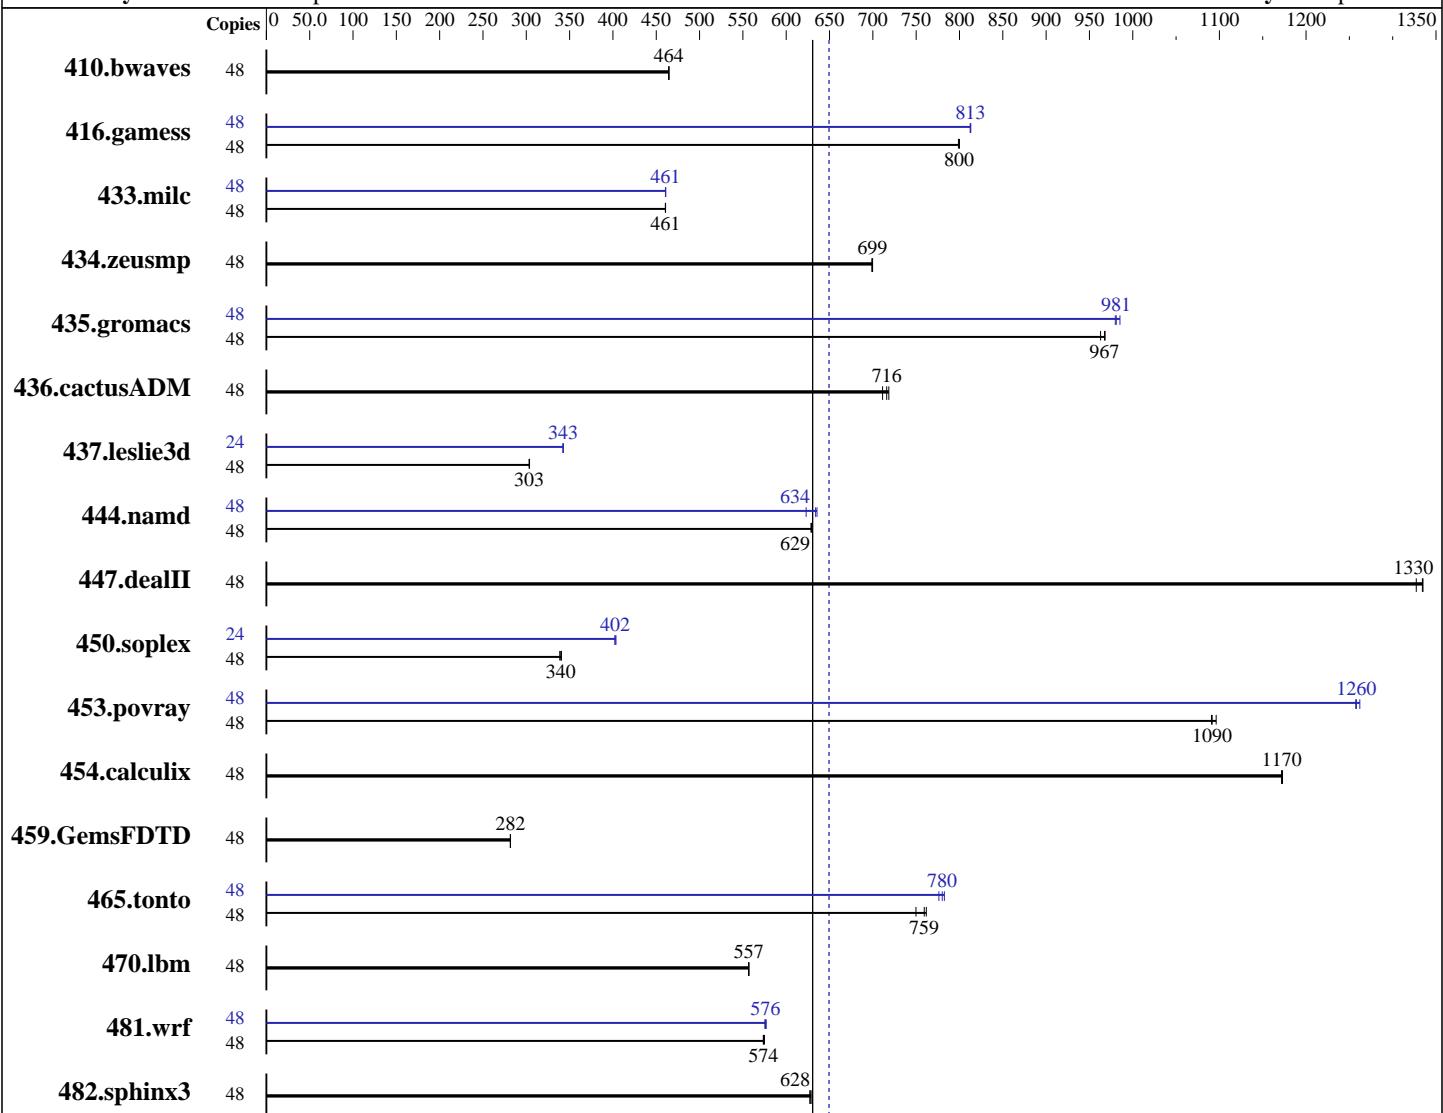

Hardware

CPU Name: Intel Xeon E5-2697 v2
CPU Characteristics: Intel Turbo Boost Technology up to 3.50 GHz
CPU MHz: 2700
FPU: Integrated
CPU(s) enabled: 24 cores, 2 chips, 12 cores/chip, 2 threads/core
CPU(s) orderable: 1,2 chips
Primary Cache: 32 KB I + 32 KB D on chip per core
Secondary Cache: 256 KB I+D on chip per core

Software

Operating System: Red Hat Enterprise Linux Server release 6.4 (Santiago)
Compiler: 2.6.32-358.el6.x86_64
C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux;
Fortran: Version 14.0.0.080 of Intel Fortran Studio XE for Linux
Auto Parallel: No
File System: ext4

Continued on next page

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

IBM BladeCenter HS23
(Intel Xeon E5-2697 v2, 2.70 GHz)

SPECfp_rate2006 = 649

SPECfp_rate_base2006 = 631

CPU2006 license: 11

Test date: Oct-2013

Test sponsor: IBM Corporation

Hardware Availability: Dec-2013

Tested by: IBM Corporation

Software Availability: Sep-2013

L3 Cache: 30 MB I+D on chip per chip
Other Cache: None
Memory: 128 GB (8 x 16 GB 2Rx4 PC3-14900R-13, ECC)
Disk Subsystem: 1 x 300 GB SAS, 10000 RPM
Other Hardware: None

System State: Run level 3 (multi-user)
Base Pointers: 32/64-bit
Peak Pointers: 32/64-bit
Other Software: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	48	1404	465	<u>1404</u>	464	1405	464	48	1404	465	<u>1404</u>	464	1405	464
416.gamess	48	1175	800	1177	799	<u>1175</u>	800	48	1156	813	1157	812	<u>1157</u>	813
433.milc	48	<u>957</u>	461	956	461	957	461	48	956	461	<u>956</u>	461	957	461
434.zeusmp	48	624	700	<u>624</u>	699	625	699	48	624	700	<u>624</u>	699	625	699
435.gromacs	48	354	968	356	963	<u>354</u>	967	48	348	985	<u>349</u>	981	350	980
436.cactusADM	48	<u>801</u>	716	798	718	806	711	48	<u>801</u>	716	798	718	806	711
437.leslie3d	48	1486	304	1487	303	<u>1487</u>	303	24	659	342	<u>659</u>	343	658	343
444.namd	48	<u>612</u>	629	612	629	612	629	48	606	636	<u>607</u>	634	618	623
447.dealII	48	411	1340	<u>412</u>	1330	414	1330	48	411	1340	<u>412</u>	1330	414	1330
450.soplex	48	1175	341	<u>1178</u>	340	1182	339	24	<u>497</u>	402	496	404	497	402
453.povray	48	<u>234</u>	1090	233	1100	234	1090	48	202	1260	203	1260	<u>203</u>	1260
454.calculix	48	338	1170	<u>338</u>	1170	338	1170	48	338	1170	<u>338</u>	1170	338	1170
459.GemsFDTD	48	1809	282	1808	282	<u>1808</u>	282	48	1809	282	1808	282	<u>1808</u>	282
465.tonto	48	<u>622</u>	759	630	750	620	762	48	604	783	608	776	<u>605</u>	780
470.lbm	48	1185	556	1184	557	<u>1184</u>	557	48	1185	556	1184	557	<u>1184</u>	557
481.wrf	48	<u>934</u>	574	933	575	935	574	48	<u>931</u>	576	929	577	932	575
482.sphinx3	48	1488	629	1491	627	<u>1491</u>	628	48	1488	629	1491	627	<u>1491</u>	628

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

Sysinfo program /cpu2006.1.2/config/sysinfo.rev6818
\$Rev: 6818 \$ \$Date:: 2012-07-17 #\\$ e86d102572650a6e4d596a3cee98f191
running on TS-IVB Wed Oct 23 02:12:42 2013

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

IBM BladeCenter HS23
(Intel Xeon E5-2697 v2, 2.70 GHz)

SPECfp_rate2006 = 649

SPECfp_rate_base2006 = 631

CPU2006 license: 11

Test date: Oct-2013

Test sponsor: IBM Corporation

Hardware Availability: Dec-2013

Tested by: IBM Corporation

Software Availability: Sep-2013

Platform Notes (Continued)

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E5-2697 v2 @ 2.70GHz
        2 "physical id"s (chips)
        48 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
    cpu cores : 12
    siblings : 24
    physical 0: cores 0 1 2 3 4 5 8 9 10 11 12 13
    physical 1: cores 0 1 2 3 4 5 8 9 10 11 12 13
cache size : 30720 KB
```

```
From /proc/meminfo
MemTotal:      132128324 kB
HugePages_Total:       0
Hugepagesize:     2048 kB
```

```
/usr/bin/lsb_release -d
Red Hat Enterprise Linux Server release 6.4 (Santiago)
```

```
From /etc/*release* /etc/*version*
redhat-release: Red Hat Enterprise Linux Server release 6.4 (Santiago)
system-release: Red Hat Enterprise Linux Server release 6.4 (Santiago)
system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server
```

```
uname -a:
Linux TS-IVB 2.6.32-358.el6.x86_64 #1 SMP Tue Jan 29 11:47:41 EST 2013 x86_64
x86_64 x86_64 GNU/Linux
```

```
run-level 3 Oct 22 13:54
```

```
SPEC is set to: /cpu2006.1.2
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/mapper/vg_tsivb-lv_root
                  ext4   265G  8.1G  244G   4%  /
```

```
Additional information from dmidecode:
BIOS IBM -[TKE135LUS-1.50]- 09/28/2013
Memory:
 8x Micron 36JDZS2G72PZ-1G9E1 16 GB 1867 MHz 2 rank
 8x Not Specified Not Specified
```

(End of data from sysinfo program)



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

IBM BladeCenter HS23
(Intel Xeon E5-2697 v2, 2.70 GHz)

SPECfp_rate2006 = 649

SPECfp_rate_base2006 = 631

CPU2006 license: 11

Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: Oct-2013

Hardware Availability: Dec-2013

Software Availability: Sep-2013

General Notes

Environment variables set by runspec before the start of the run:

```
LD_LIBRARY_PATH = "/cpu2006.1.2/lib32:/cpu2006.1.2/lib64:/cpu2006.1.2/sh"
```

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB

memory using RedHat EL 6.4

Transparent Huge Pages enabled with:

```
echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled
```

Filesystem page cache cleared with:

```
echo 1> /proc/sys/vm/drop_caches
```

runspec command invoked through numactl i.e.:

```
numactl --interleave=all runspec <etc>
```

Base Compiler Invocation

C benchmarks:

```
icc -m64
```

C++ benchmarks:

```
icpc -m64
```

Fortran benchmarks:

```
ifort -m64
```

Benchmarks using both Fortran and C:

```
icc -m64 ifort -m64
```

Base Portability Flags

```
410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64
```



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

IBM BladeCenter HS23
(Intel Xeon E5-2697 v2, 2.70 GHz)

SPECfp_rate2006 = 649

SPECfp_rate_base2006 = 631

CPU2006 license: 11

Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: Oct-2013

Hardware Availability: Dec-2013

Software Availability: Sep-2013

Base Optimization Flags

C benchmarks:

```
-xAVX -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -ansi-alias  
-opt-mem-layout-trans=3
```

C++ benchmarks:

```
-xAVX -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -ansi-alias  
-opt-mem-layout-trans=3
```

Fortran benchmarks:

```
-xAVX -ipo -O3 -no-prec-div -opt-prefetch
```

Benchmarks using both Fortran and C:

```
-xAVX -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -ansi-alias  
-opt-mem-layout-trans=3
```

Peak Compiler Invocation

C benchmarks:

```
icc -m64
```

C++ benchmarks (except as noted below):

```
icpc -m64
```

450.soplex: icpc -m32

Fortran benchmarks:

```
ifort -m64
```

Benchmarks using both Fortran and C:

```
icc -m64 ifort -m64
```

Peak Portability Flags

```
410.bwaves: -DSPEC_CPU_LP64  
416.gamess: -DSPEC_CPU_LP64  
433.milc: -DSPEC_CPU_LP64  
434.zeusmp: -DSPEC_CPU_LP64  
435.gromacs: -DSPEC_CPU_LP64 -nofor_main  
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main  
437.leslie3d: -DSPEC_CPU_LP64  
444.namd: -DSPEC_CPU_LP64  
447.dealII: -DSPEC_CPU_LP64  
453.povray: -DSPEC_CPU_LP64  
454.calculix: -DSPEC_CPU_LP64 -nofor_main  
459.GemsFDTD: -DSPEC_CPU_LP64
```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

IBM BladeCenter HS23
(Intel Xeon E5-2697 v2, 2.70 GHz)

SPECfp_rate2006 = 649

SPECfp_rate_base2006 = 631

CPU2006 license: 11

Test date: Oct-2013

Test sponsor: IBM Corporation

Hardware Availability: Dec-2013

Tested by: IBM Corporation

Software Availability: Sep-2013

Peak Portability Flags (Continued)

```
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64
```

Peak Optimization Flags

C benchmarks:

```
433.milc: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
           -no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
           -prof-use(pass 2) -auto-ilp32
```

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

```
444.namd: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
           -no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
           -prof-use(pass 2) -fno-alias -auto-ilp32
```

447.dealII: basepeak = yes

```
450.soplex: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
           -no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
           -prof-use(pass 2) -opt-malloc-options=3
```

```
453.povray: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
           -no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
           -prof-use(pass 2) -unroll14 -ansi-alias
```

Fortran benchmarks:

410.bwaves: basepeak = yes

```
416.gamess: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
           -no-prec-div(pass 2) -prof-use(pass 2) -unroll2
           -inline-level=0 -scalar-rep-
```

434.zeusmp: basepeak = yes

437.leslie3d: -xAVX -ipo -O3 -no-prec-div -opt-prefetch

459.GemsFDTD: basepeak = yes

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

IBM BladeCenter HS23
(Intel Xeon E5-2697 v2, 2.70 GHz)

SPECfp_rate2006 = 649

SPECfp_rate_base2006 = 631

CPU2006 license: 11

Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: Oct-2013

Hardware Availability: Dec-2013

Software Availability: Sep-2013

Peak Optimization Flags (Continued)

465.tonto: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -auto
-inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
-prof-use(pass 2) -opt-prefetch -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: -xAVX -ipo -O3 -no-prec-div -auto-ilp32

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/IBM-Platform-Flags-V1.2-IVB-A.html>

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/IBM-Platform-Flags-V1.2-IVB-A.xml>

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.

Report generated on Thu Jul 24 19:52:37 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 25 February 2014.