



# SPEC<sup>®</sup> CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Fujitsu

**SPECfp<sup>®</sup>2006 = 86.9**

PRIMERGY BX920 S4, Intel Xeon E5-2470 v2, 2.40 GHz

**SPECfp\_base2006 = 83.3**

CPU2006 license: 19


Test date: Dec-2013

Test sponsor: Fujitsu

Hardware Availability: Jan-2014

Tested by: Fujitsu

Software Availability: Sep-2013

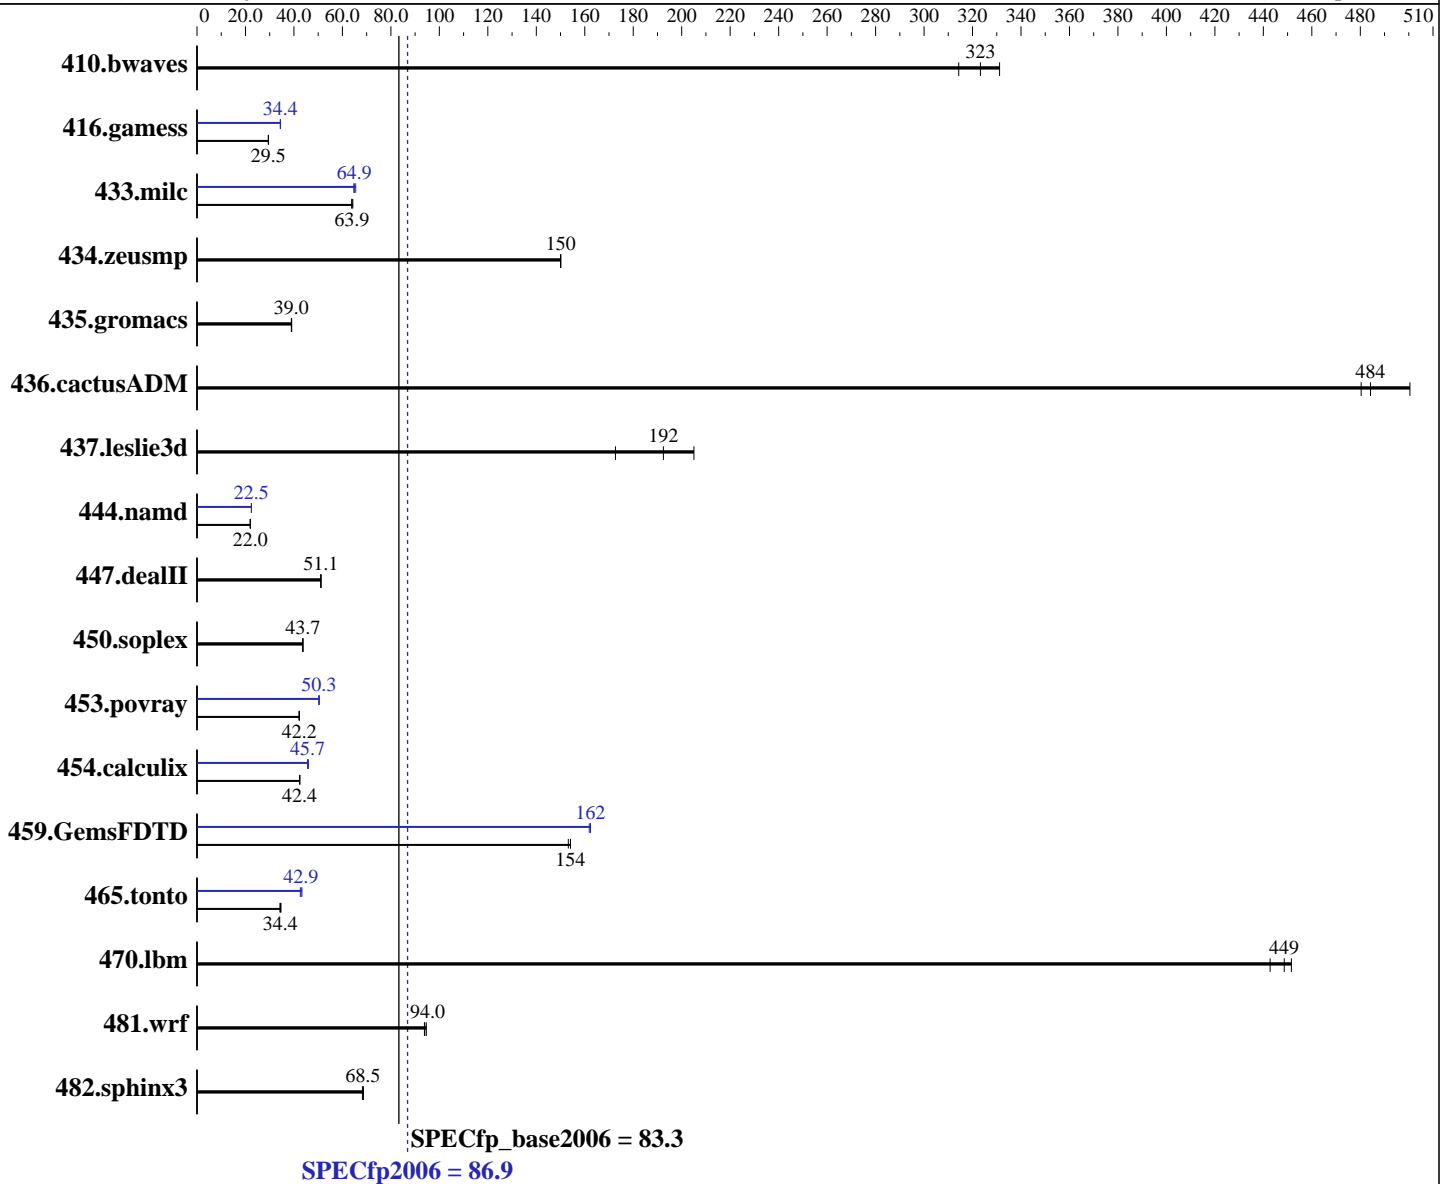

### Hardware

CPU Name: Intel Xeon E5-2470 v2  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.20 GHz  
 CPU MHz: 2400  
 FPU: Integrated  
 CPU(s) enabled: 20 cores, 2 chips, 10 cores/chip, 2 threads/core  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

### Software

Operating System: Red Hat Enterprise Linux Server release 6.4 (Santiago)  
 2.6.32-358.11.1.el6.x86\_64  
 Compiler: C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux;  
 Fortran: Version 14.0.0.080 of Intel Fortran Studio XE for Linux  
 Auto Parallel: Yes  
 File System: ext4

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Fujitsu

SPECfp2006 = **86.9**

PRIMERGY BX920 S4, Intel Xeon E5-2470 v2, 2.40 GHz

SPECfp\_base2006 = **83.3**

CPU2006 license: 19

Test date: Dec-2013

Test sponsor: Fujitsu

Hardware Availability: Jan-2014

Tested by: Fujitsu

Software Availability: Sep-2013

L3 Cache: 25 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 192 GB (12 x 16 GB 2Rx4 PC3L-12800R-11, ECC)  
 Disk Subsystem: 1 x SATA, 500 GB, 7200 RPM  
 Other Hardware: None

System State: Run level 5 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 32/64-bit  
 Other Software: None

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	43.2	314	41.0	331	<b>42.0</b>	<b>323</b>	43.2	314	41.0	331	<b>42.0</b>	<b>323</b>
416.gamess	<b>665</b>	<b>29.5</b>	664	29.5	665	29.5	569	34.4	<b>569</b>	<b>34.4</b>	568	34.5
433.milc	143	64.3	144	63.9	<b>144</b>	<b>63.9</b>	<b>141</b>	<b>64.9</b>	142	64.7	140	65.5
434.zeusmp	<b>60.6</b>	<b>150</b>	60.6	150	60.6	150	<b>60.6</b>	<b>150</b>	60.6	150	60.6	150
435.gromacs	183	38.9	<b>183</b>	<b>39.0</b>	183	39.1	183	38.9	<b>183</b>	<b>39.0</b>	183	39.1
436.cactusADM	23.9	500	<b>24.7</b>	<b>484</b>	24.9	480	23.9	500	<b>24.7</b>	<b>484</b>	24.9	480
437.leslie3d	54.4	173	<b>48.8</b>	<b>192</b>	45.8	205	54.4	173	<b>48.8</b>	<b>192</b>	45.8	205
444.namd	364	22.1	<b>365</b>	<b>22.0</b>	365	22.0	357	22.5	<b>357</b>	<b>22.5</b>	357	22.5
447.dealII	224	51.2	<b>224</b>	<b>51.1</b>	224	51.1	224	51.2	<b>224</b>	<b>51.1</b>	224	51.1
450.soplex	191	43.7	191	43.6	<b>191</b>	<b>43.7</b>	191	43.7	191	43.6	<b>191</b>	<b>43.7</b>
453.povray	126	42.3	<b>126</b>	<b>42.2</b>	126	42.1	<b>106</b>	<b>50.3</b>	106	50.3	105	50.5
454.calculix	195	42.4	195	42.4	<b>195</b>	<b>42.4</b>	<b>181</b>	<b>45.7</b>	179	46.0	181	45.7
459.GemsFDTD	68.9	154	69.3	153	<b>68.9</b>	<b>154</b>	65.6	162	65.3	162	<b>65.3</b>	<b>162</b>
465.tonto	<b>286</b>	<b>34.4</b>	287	34.2	284	34.7	<b>229</b>	<b>42.9</b>	227	43.3	231	42.6
470.lbm	<b>30.6</b>	<b>449</b>	30.4	452	31.0	443	<b>30.6</b>	<b>449</b>	30.4	452	31.0	443
481.wrf	119	93.8	<b>119</b>	<b>94.0</b>	118	94.6	119	93.8	<b>119</b>	<b>94.0</b>	118	94.6
482.sphinx3	286	68.3	284	68.6	<b>284</b>	<b>68.5</b>	286	68.3	284	68.6	<b>284</b>	<b>68.5</b>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

BIOS configuration:  
 Energy Performance = Performance  
 Utilization Profile = Unbalanced

## General Notes

Environment variables set by runspec before the start of the run:  
 KMP\_AFFINITY = "granularity=fine,compact,1,0"  
 LD\_LIBRARY\_PATH = "/SPECcpu2006/libs/32:/SPECcpu2006/libs/64:/SPECcpu2006/sh"

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Fujitsu**

**SPECfp2006 = 86.9**

PRIMERGY BX920 S4, Intel Xeon E5-2470 v2, 2.40 GHz

**SPECfp\_base2006 = 83.3**

**CPU2006 license:** 19

**Test date:** Dec-2013

**Test sponsor:** Fujitsu

**Hardware Availability:** Jan-2014

**Tested by:** Fujitsu

**Software Availability:** Sep-2013

## General Notes (Continued)

OMP\_NUM\_THREADS = "20"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB memory using RedHat EL 6.4

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/redhat\_transparent\_hugepage/enabled

For information about Fujitsu please visit: <http://www.fujitsu.com>

## Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
 416.gamess: -DSPEC\_CPU\_LP64  
 433.milc: -DSPEC\_CPU\_LP64  
 434.zeusmp: -DSPEC\_CPU\_LP64  
 435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
 436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
 437.leslie3d: -DSPEC\_CPU\_LP64  
 444.namd: -DSPEC\_CPU\_LP64  
 447.deallI: -DSPEC\_CPU\_LP64  
 450.soplex: -DSPEC\_CPU\_LP64  
 453.povray: -DSPEC\_CPU\_LP64  
 454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
 459.GemsFDTD: -DSPEC\_CPU\_LP64  
 465.tonto: -DSPEC\_CPU\_LP64  
 470.lbm: -DSPEC\_CPU\_LP64  
 481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
 482.sphinx3: -DSPEC\_CPU\_LP64



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Fujitsu**

**SPECfp2006 = 86.9**

PRIMERGY BX920 S4, Intel Xeon E5-2470 v2, 2.40 GHz

**SPECfp\_base2006 = 83.3**

CPU2006 license: 19

Test date: Dec-2013

Test sponsor: Fujitsu

Hardware Availability: Jan-2014

Tested by: Fujitsu

Software Availability: Sep-2013

## Base Optimization Flags

C benchmarks:

`-xAVX -ipo -O3 -no-prec-div -parallel -opt-prefetch -ansi-alias`

C++ benchmarks:

`-xAVX -ipo -O3 -no-prec-div -opt-prefetch -ansi-alias`

Fortran benchmarks:

`-xAVX -ipo -O3 -no-prec-div -parallel -opt-prefetch`

Benchmarks using both Fortran and C:

`-xAVX -ipo -O3 -no-prec-div -parallel -opt-prefetch -ansi-alias`

## Peak Compiler Invocation

C benchmarks:

`icc -m64`

C++ benchmarks:

`icpc -m64`

Fortran benchmarks:

`ifort -m64`

Benchmarks using both Fortran and C:

`icc -m64 ifort -m64`

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

433.milc: `-xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -auto-ilp32  
-ansi-alias`

470.lbm: `basepeak = yes`

482.sphinx3: `basepeak = yes`

C++ benchmarks:

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Fujitsu**

**SPECfp2006 = 86.9**

PRIMERGY BX920 S4, Intel Xeon E5-2470 v2, 2.40 GHz

**SPECfp\_base2006 = 83.3**

**CPU2006 license:** 19

**Test date:** Dec-2013

**Test sponsor:** Fujitsu

**Hardware Availability:** Jan-2014

**Tested by:** Fujitsu

**Software Availability:** Sep-2013

## Peak Optimization Flags (Continued)

444.namd: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -fno-alias  
-auto-ilp32

447.dealIII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -ansi-alias

### Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2  
-inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2  
-inline-level=0 -opt-prefetch -parallel

465.tonto: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -inline-calloc  
-opt-malloc-options=3 -auto -unroll4

### Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

454.calculix: -xAVX -ipo -O3 -no-prec-div -auto-ilp32 -ansi-alias

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Fujitsu-Platform.20131009.html>

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Fujitsu-Platform.20131009.xml>

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.xml>



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

SPECfp2006 = 86.9

PRIMERGY BX920 S4, Intel Xeon E5-2470 v2, 2.40 GHz

SPECfp\_base2006 = 83.3

CPU2006 license: 19

Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: Dec-2013

Hardware Availability: Jan-2014

Software Availability: Sep-2013

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Thu Jul 24 20:28:40 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 11 February 2014.