



# SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## IBM Corporation

IBM System x3650 M4  
(Intel Xeon E5-2637 v2, 3.50 GHz)

**SPECfp®\_rate2006 = 392**

**SPECfp\_rate\_base2006 = 384**

CPU2006 license: 11


Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: Jan-2014

Hardware Availability: Dec-2013

Software Availability: Sep-2013

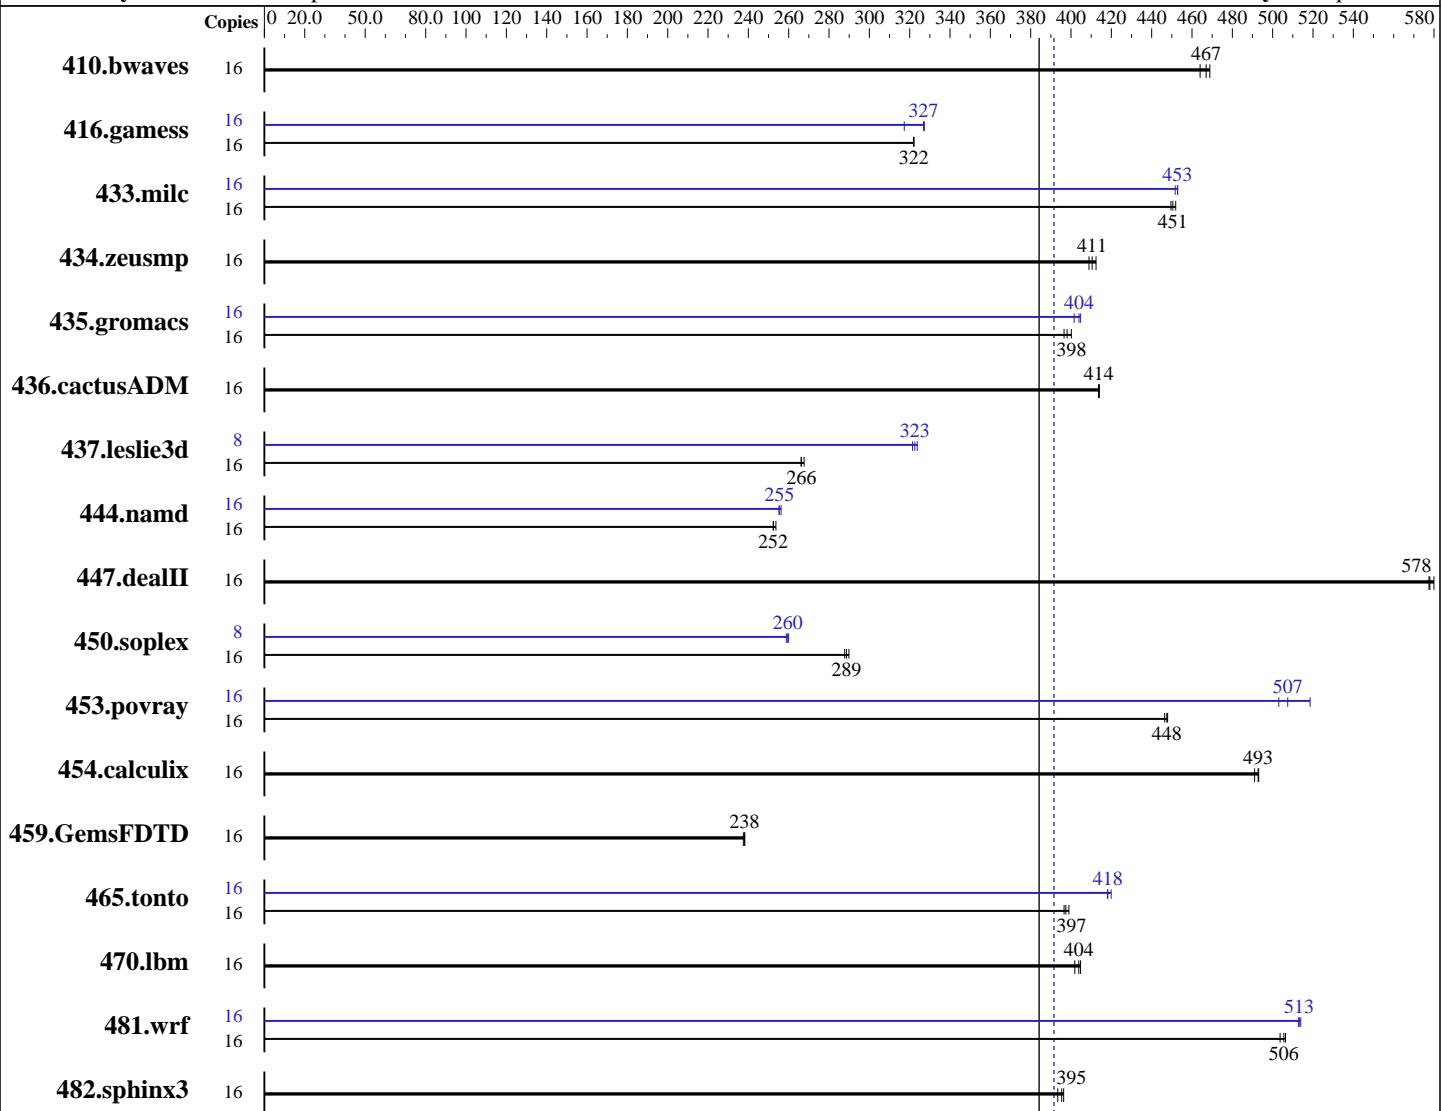

**SPECfp\_rate\_base2006 = 384**

**SPECfp\_rate2006 = 392**

### Hardware

CPU Name: Intel Xeon E5-2637 v2  
CPU Characteristics: Intel Turbo Boost Technology up to 3.80 GHz  
CPU MHz: 3500  
FPU: Integrated  
CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip, 2 threads/core  
CPU(s) orderable: 1,2 chips  
Primary Cache: 32 KB I + 32 KB D on chip per core  
Secondary Cache: 256 KB I+D on chip per core

### Software

Operating System: Red Hat Enterprise Linux Server release 6.4 (Santiago)  
Compiler: 2.6.32-358.el6.x86\_64  
C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux;  
Fortran: Version 14.0.0.080 of Intel Fortran Studio XE for Linux  
Auto Parallel: No  
File System: ext4

Continued on next page

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## IBM Corporation

IBM System x3650 M4  
(Intel Xeon E5-2637 v2, 3.50 GHz)

**SPECfp\_rate2006 = 392**

**SPECfp\_rate\_base2006 = 384**

CPU2006 license: 11

Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: Jan-2014

Hardware Availability: Dec-2013

Software Availability: Sep-2013

L3 Cache: 15 MB I+D on chip per chip  
Other Cache: None  
Memory: 256 GB (16 x 16 GB 2Rx4 PC3-14900R-13, ECC)  
Disk Subsystem: 1 x 400 GB SAS SSD, RAID 0  
Other Hardware: None

System State: Run level 3 (multi-user)  
Base Pointers: 32/64-bit  
Peak Pointers: 32/64-bit  
Other Software: None

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	16	469	464	<b>466</b>	<b>467</b>	464	469	16	469	464	<b>466</b>	<b>467</b>	464	469
416.gamess	16	973	322	973	322	<b>973</b>	<b>322</b>	16	987	317	957	327	<b>959</b>	<b>327</b>
433.milc	16	327	450	325	452	<b>326</b>	<b>451</b>	16	<b>324</b>	<b>453</b>	325	452	324	453
434.zeusmp	16	<b>355</b>	<b>411</b>	353	412	356	409	16	<b>355</b>	<b>411</b>	353	412	356	409
435.gromacs	16	288	397	<b>287</b>	<b>398</b>	285	400	16	<b>283</b>	<b>404</b>	282	405	285	402
436.cactusADM	16	<b>462</b>	<b>414</b>	462	414	462	414	16	<b>462</b>	<b>414</b>	462	414	462	414
437.leslie3d	16	562	268	565	266	<b>565</b>	<b>266</b>	8	234	321	232	324	<b>233</b>	<b>323</b>
444.namd	16	506	254	508	252	<b>508</b>	<b>252</b>	16	503	255	501	256	<b>502</b>	<b>255</b>
447.dealII	16	316	580	317	578	<b>317</b>	<b>578</b>	16	316	580	317	578	<b>317</b>	<b>578</b>
450.soplex	16	460	290	464	288	<b>462</b>	<b>289</b>	8	<b>257</b>	260	258	259	<b>257</b>	<b>260</b>
453.povray	16	<b>190</b>	<b>448</b>	191	446	190	448	16	169	503	<b>168</b>	<b>507</b>	164	519
454.calculix	16	268	493	<b>268</b>	<b>493</b>	269	491	16	268	493	<b>268</b>	<b>493</b>	269	491
459.GemsFDTD	16	715	238	<b>713</b>	<b>238</b>	713	238	16	715	238	<b>713</b>	<b>238</b>	713	238
465.tonto	16	397	397	395	399	<b>396</b>	<b>397</b>	16	375	420	377	418	<b>376</b>	<b>418</b>
470.lbm	16	543	405	547	402	<b>544</b>	<b>404</b>	16	543	405	547	402	<b>544</b>	<b>404</b>
481.wrf	16	355	504	<b>354</b>	<b>506</b>	353	506	16	348	514	348	513	<b>348</b>	<b>513</b>
482.sphinx3	16	<b>789</b>	<b>395</b>	793	393	787	396	16	<b>789</b>	<b>395</b>	793	393	787	396

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"  
Zone reclaim mode enabled with:  
echo 1 > /proc/sys/vm/zone\_reclaim\_mode



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## IBM Corporation

IBM System x3650 M4  
(Intel Xeon E5-2637 v2, 3.50 GHz)

**SPECfp\_rate2006 = 392**

**SPECfp\_rate\_base2006 = 384**

**CPU2006 license:** 11

**Test sponsor:** IBM Corporation

**Tested by:** IBM Corporation

**Test date:** Jan-2014

**Hardware Availability:** Dec-2013

**Software Availability:** Sep-2013

## Platform Notes

BIOS setting:

Operating Mode set to Maximum Performance  
Sysinfo program /home/SPECcpu-new/config/sysinfo.rev6818  
\$Rev: 6818 \$ \$Date:: 2012-07-17 #\$ e86d102572650a6e4d596a3cee98f191  
running on x3650M4 Thu Jan 16 22:48:53 2014

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:  
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo  
model name : Intel(R) Xeon(R) CPU E5-2637 v2 @ 3.50GHz  
2 "physical id"s (chips)  
16 "processors"  
cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)  
cpu cores : 4  
siblings : 8  
physical 0: cores 1 2 3 4  
physical 1: cores 1 2 3 4  
cache size : 15360 KB

From /proc/meminfo  
MemTotal: 264342644 kB  
HugePages\_Total: 0  
Hugepagesize: 2048 kB

/usr/bin/lsb\_release -d  
Red Hat Enterprise Linux Server release 6.4 (Santiago)

From /etc/\*release\* /etc/\*version\*  
redhat-release: Red Hat Enterprise Linux Server release 6.4 (Santiago)  
system-release: Red Hat Enterprise Linux Server release 6.4 (Santiago)  
system-release-cpe: cpe:/o:redhat:enterprise\_linux:6server:ga:server

uname -a:  
Linux x3650M4 2.6.32-358.18.1.el6.x86\_64 #1 SMP Fri Aug 2 17:04:38 EDT 2013  
x86\_64 x86\_64 x86\_64 GNU/Linux

run-level 3 Jan 16 12:48

SPEC is set to: /home/SPECcpu-new  
Filesystem Type Size Used Avail Use% Mounted on  
/dev/mapper/vg\_x3650m4-lv\_home ext4 313G 215G 83G 73% /home

Additional information from dmidecode:

BIOS IBM -[TESTBUILD-1.50]- 08/09/2013

Memory:

8x Not Specified Not Specified  
16x Samsung M393B2G70QH0-CMA 16 GB 1867 MHz 2 rank  
Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## IBM Corporation

IBM System x3650 M4  
(Intel Xeon E5-2637 v2, 3.50 GHz)

**SPECfp\_rate2006 = 392**

**SPECfp\_rate\_base2006 = 384**

CPU2006 license: 11

Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: Jan-2014

Hardware Availability: Dec-2013

Software Availability: Sep-2013

## Platform Notes (Continued)

(End of data from sysinfo program)

"Not Specified" memory information from dmidecode indicates unused DIMM slots.

The BIOS IBM -[TESTBUILD-1.50] is equivalent to production version [VVE134TUS-1.51]

## General Notes

Environment variables set by runspec before the start of the run:

LD\_LIBRARY\_PATH = "/home/SPECCpu-new/libs/32:/home/SPECCpu-new/libs/64:/home/SPECCpu-new/sh"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB  
memory using RedHat EL 6.4

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/redhat\_transparent\_hugepage/enabled

Filesystem page cache cleared with:

echo 1> /proc/sys/vm/drop\_caches

runspec command invoked through numactl i.e.:

numactl --interleave=all runspec <etc>

## Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.dealII: -DSPEC\_CPU\_LP64  
450.soplex: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## IBM Corporation

IBM System x3650 M4  
(Intel Xeon E5-2637 v2, 3.50 GHz)

**SPECfp\_rate2006 = 392**

**SPECfp\_rate\_base2006 = 384**

CPU2006 license: 11

Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: Jan-2014

Hardware Availability: Dec-2013

Software Availability: Sep-2013

## Base Portability Flags (Continued)

```
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64
```

## Base Optimization Flags

C benchmarks:

```
-xAVX -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -ansi-alias
-opt-mem-layout-trans=3
```

C++ benchmarks:

```
-xAVX -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -ansi-alias
-opt-mem-layout-trans=3
```

Fortran benchmarks:

```
-xAVX -ipo -O3 -no-prec-div -opt-prefetch
```

Benchmarks using both Fortran and C:

```
-xAVX -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -ansi-alias
-opt-mem-layout-trans=3
```

## Peak Compiler Invocation

C benchmarks:

```
icc -m64
```

C++ benchmarks (except as noted below):

```
icpc -m64
```

450.soplex: icpc -m32

Fortran benchmarks:

```
ifort -m64
```

Benchmarks using both Fortran and C:

```
icc -m64 ifort -m64
```

## Peak Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## IBM Corporation

IBM System x3650 M4  
(Intel Xeon E5-2637 v2, 3.50 GHz)

**SPECfp\_rate2006 = 392**

**SPECfp\_rate\_base2006 = 384**

**CPU2006 license:** 11

**Test sponsor:** IBM Corporation

**Tested by:** IBM Corporation

**Test date:** Jan-2014

**Hardware Availability:** Dec-2013

**Software Availability:** Sep-2013

## Peak Portability Flags (Continued)

```

416.gamess: -DSPEC_CPU_LP64
 433.milc: -DSPEC_CPU_LP64
 434.zeusmp: -DSPEC_CPU_LP64
 435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
 437.leslie3d: -DSPEC_CPU_LP64
 444.namd: -DSPEC_CPU_LP64
 447.dealII: -DSPEC_CPU_LP64
 453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
 465.tonto: -DSPEC_CPU_LP64
 470.lbm: -DSPEC_CPU_LP64
 481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

```

## Peak Optimization Flags

C benchmarks:

```

433.milc: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
  -no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
  -prof-use(pass 2) -auto-ilp32

```

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

```

444.namd: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
  -no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
  -prof-use(pass 2) -fno-alias -auto-ilp32

```

447.dealII: basepeak = yes

```

450.soplex: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
  -no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
  -prof-use(pass 2) -opt-malloc-options=3

```

```

453.povray: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
  -no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
  -prof-use(pass 2) -unroll14 -ansi-alias

```

Fortran benchmarks:

410.bwaves: basepeak = yes

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## IBM Corporation

IBM System x3650 M4  
(Intel Xeon E5-2637 v2, 3.50 GHz)

**SPECfp\_rate2006 = 392**

**SPECfp\_rate\_base2006 = 384**

**CPU2006 license:** 11

**Test sponsor:** IBM Corporation

**Tested by:** IBM Corporation

**Test date:** Jan-2014

**Hardware Availability:** Dec-2013

**Software Availability:** Sep-2013

## Peak Optimization Flags (Continued)

416.gamess: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2  
-inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: -xAVX -ipo -O3 -no-prec-div -opt-prefetch

459.GemsFDTD: basepeak = yes

465.tonto: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -auto  
-inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)  
-prof-use(pass 2) -opt-prefetch -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: -xAVX -ipo -O3 -no-prec-div -auto-ilp32

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.html>  
<http://www.spec.org/cpu2006/flags/IBM-Platform-Flags-V1.2-IVB-A.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.xml>  
<http://www.spec.org/cpu2006/flags/IBM-Platform-Flags-V1.2-IVB-A.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.

Report generated on Thu Jul 24 20:30:36 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 11 February 2014.