



SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

SPECfp®2006 = 78.3

PRIMERGY CX250 S2, Intel Xeon E5-2640 v2, 2.00 GHz

SPECfp_base2006 = 75.4

CPU2006 license: 19


Test date: Jan-2014

Test sponsor: Fujitsu

Hardware Availability: Sep-2013

Tested by: Fujitsu

Software Availability: Sep-2013

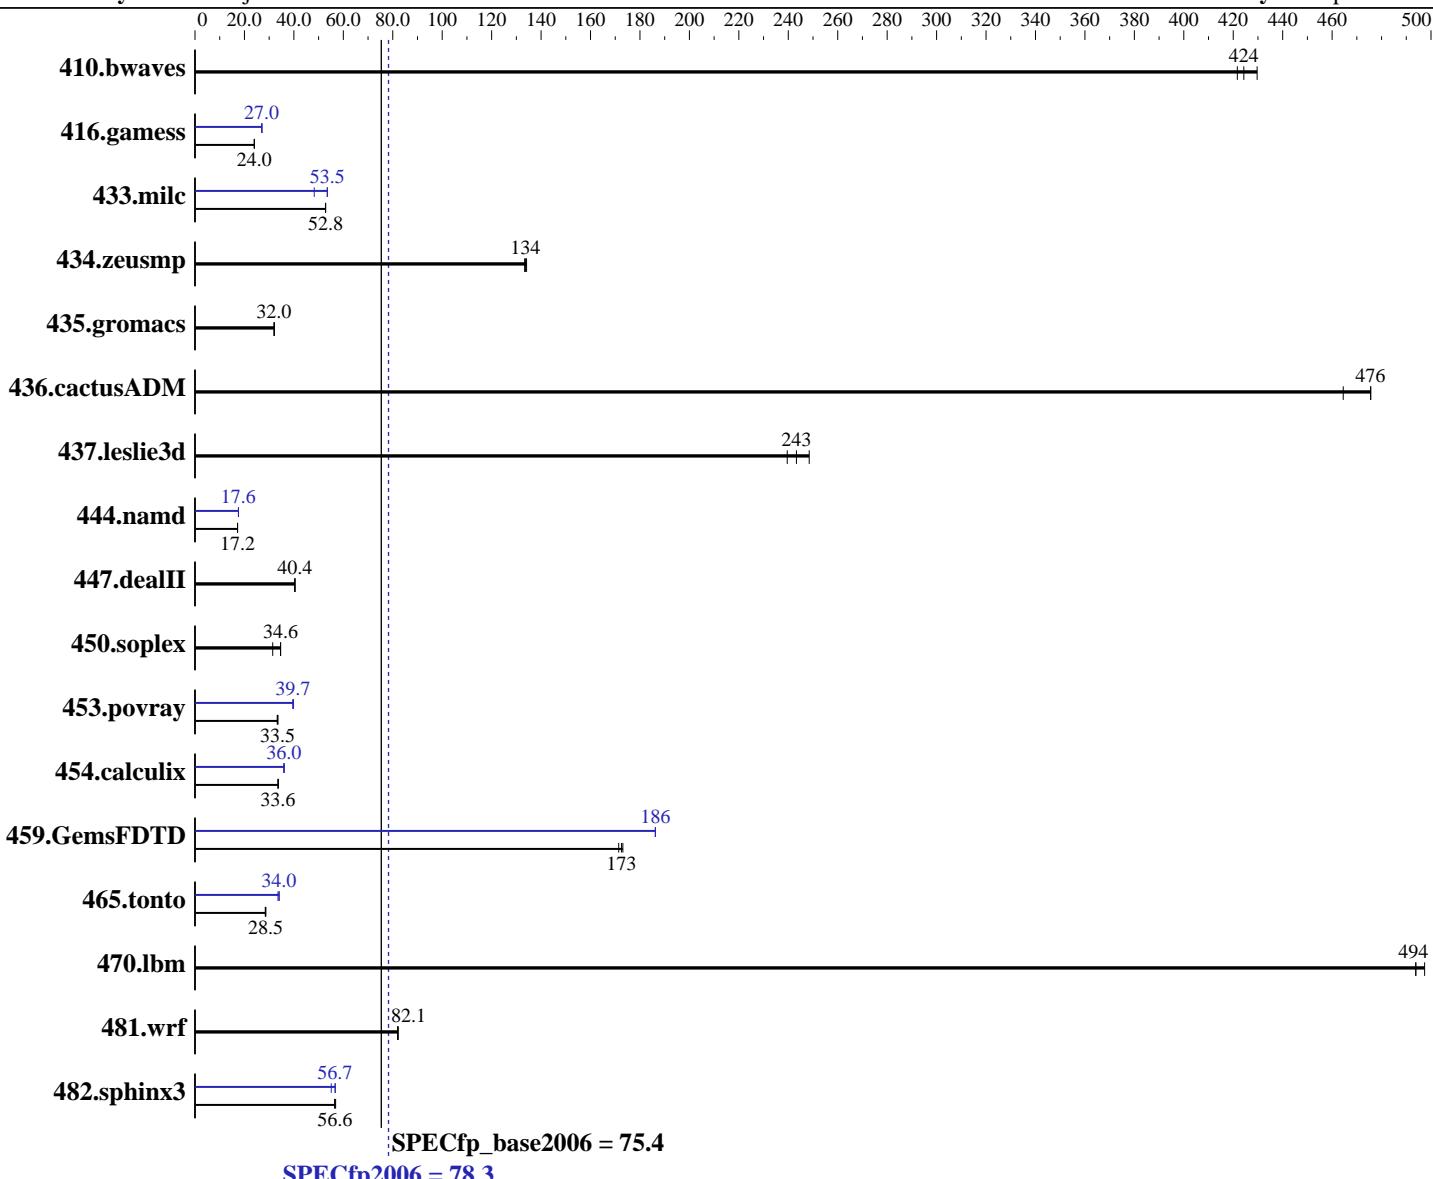

Hardware

CPU Name: Intel Xeon E5-2640 v2
CPU Characteristics: Intel Turbo Boost Technology up to 2.50 GHz
CPU MHz: 2000
FPU: Integrated
CPU(s) enabled: 16 cores, 2 chips, 8 cores/chip, 2 threads/core
CPU(s) orderable: 1,2 chips
Primary Cache: 32 KB I + 32 KB D on chip per core
Secondary Cache: 256 KB I+D on chip per core

Continued on next page

Software

Operating System: Red Hat Enterprise Linux Server release 6.4 (Santiago)
Compiler: 2.6.32-358.11.1.el6.x86_64
C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux;
Fortran: Version 14.0.0.080 of Intel Fortran Studio XE for Linux
Auto Parallel: Yes
File System: ext4

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY CX250 S2, Intel Xeon E5-2640 v2, 2.00 GHz

SPECfp2006 = 78.3

SPECfp_base2006 = 75.4

CPU2006 license: 19

Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: Jan-2014

Hardware Availability: Sep-2013

Software Availability: Sep-2013

L3 Cache: 20 MB I+D on chip per chip
 Other Cache: None
 Memory: 256 GB (16 x 16 GB 2Rx4 PC3-14900R-13, ECC, running at 1600 MHz and CL11)
 Disk Subsystem: 1 x SATA, 500 GB, 7200 RPM
 Other Hardware: None

System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 32/64-bit
 Other Software: None

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	31.6	430	<u>32.0</u>	<u>424</u>	32.2	422	31.6	430	<u>32.0</u>	<u>424</u>	32.2	422
416.gamess	814	24.0	816	24.0	<u>816</u>	<u>24.0</u>	725	27.0	723	27.1	<u>724</u>	<u>27.0</u>
433.milc	174	52.9	<u>174</u>	<u>52.8</u>	174	52.8	171	53.6	190	48.2	<u>172</u>	<u>53.5</u>
434.zeusmp	<u>68.0</u>	<u>134</u>	68.2	133	67.8	134	<u>68.0</u>	<u>134</u>	68.2	133	67.8	134
435.gromacs	222	32.1	223	32.0	<u>223</u>	<u>32.0</u>	222	32.1	223	32.0	<u>223</u>	<u>32.0</u>
436.cactusADM	<u>25.1</u>	<u>476</u>	25.1	476	25.7	464	<u>25.1</u>	<u>476</u>	25.1	476	25.7	464
437.leslie3d	<u>38.6</u>	<u>243</u>	39.2	240	37.8	248	<u>38.6</u>	<u>243</u>	39.2	240	37.8	248
444.namd	<u>466</u>	<u>17.2</u>	466	17.2	466	17.2	456	17.6	457	17.6	<u>456</u>	<u>17.6</u>
447.dealII	284	40.4	283	40.5	<u>283</u>	<u>40.4</u>	284	40.4	283	40.5	<u>283</u>	<u>40.4</u>
450.soplex	265	31.4	<u>241</u>	<u>34.6</u>	241	34.6	265	31.4	<u>241</u>	<u>34.6</u>	241	34.6
453.povray	159	33.5	<u>159</u>	<u>33.5</u>	160	33.3	133	39.9	<u>134</u>	<u>39.7</u>	134	39.6
454.calculix	246	33.6	<u>245</u>	<u>33.6</u>	245	33.7	229	36.1	<u>229</u>	<u>36.0</u>	230	35.9
459.GemsFDTD	61.9	171	<u>61.5</u>	<u>173</u>	61.3	173	57.0	186	<u>57.0</u>	<u>186</u>	57.0	186
465.tonto	346	28.4	343	28.7	<u>345</u>	<u>28.5</u>	293	33.6	<u>289</u>	<u>34.0</u>	289	34.0
470.lbm	27.8	494	<u>27.8</u>	<u>494</u>	27.6	497	27.8	494	<u>27.8</u>	<u>494</u>	27.6	497
481.wrf	<u>136</u>	<u>82.1</u>	136	82.2	136	82.0	<u>136</u>	<u>82.1</u>	136	82.2	136	82.0
482.sphinx3	<u>344</u>	<u>56.6</u>	345	56.5	343	56.9	<u>344</u>	<u>56.7</u>	354	55.1	343	56.8

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

BIOS configuration:

Energy Performance = Performance
 Utilization Profile = Unbalanced



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY CX250 S2, Intel Xeon E5-2640 v2, 2.00 GHz

SPECfp2006 = 78.3

SPECfp_base2006 = 75.4

CPU2006 license: 19

Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: Jan-2014

Hardware Availability: Sep-2013

Software Availability: Sep-2013

General Notes

Environment variables set by runspec before the start of the run:

KMP_AFFINITY = "granularity=fine,compact,1,0"

LD_LIBRARY_PATH = "/SPECcpu2006/libs/32:/SPECcpu2006/libs/64:/SPECcpu2006/sh"

OMP_NUM_THREADS = "16"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB memory using RedHat EL 6.4

Transparent Huge Pages enabled with:

```
echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled  
runspec command invoked through numactl i.e.:
```

```
numactl --interleave=all runspec <etc>
```

For information about Fujitsu please visit: <http://www.fujitsu.com>

Base Compiler Invocation

C benchmarks:

```
icc -m64
```

C++ benchmarks:

```
icpc -m64
```

Fortran benchmarks:

```
ifort -m64
```

Benchmarks using both Fortran and C:

```
icc -m64 ifort -m64
```

Base Portability Flags

```
410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
    433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
    437.leslie3d: -DSPEC_CPU_LP64
        444.namd: -DSPEC_CPU_LP64
        447.dealII: -DSPEC_CPU_LP64
        450.soplex: -DSPEC_CPU_LP64
        453.povray: -DSPEC_CPU_LP64
        454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
    465.tonto: -DSPEC_CPU_LP64
    470.lbm: -DSPEC_CPU_LP64
        481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64
```



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY CX250 S2, Intel Xeon E5-2640 v2, 2.00 GHz

SPECfp2006 = 78.3

SPECfp_base2006 = 75.4

CPU2006 license: 19

Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: Jan-2014

Hardware Availability: Sep-2013

Software Availability: Sep-2013

Base Optimization Flags

C benchmarks:

```
-xAVX -ipo -O3 -no-prec-div -parallel -opt-prefetch -ansi-alias
```

C++ benchmarks:

```
-xAVX -ipo -O3 -no-prec-div -opt-prefetch -ansi-alias
```

Fortran benchmarks:

```
-xAVX -ipo -O3 -no-prec-div -parallel -opt-prefetch
```

Benchmarks using both Fortran and C:

```
-xAVX -ipo -O3 -no-prec-div -parallel -opt-prefetch -ansi-alias
```

Peak Compiler Invocation

C benchmarks:

```
icc -m64
```

C++ benchmarks:

```
icpc -m64
```

Fortran benchmarks:

```
ifort -m64
```

Benchmarks using both Fortran and C:

```
icc -m64 ifort -m64
```

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

```
433.milc: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
          -no-prec-div(pass 2) -prof-use(pass 2) -auto-ilp32  
          -ansi-alias
```

```
470.lbm: basepeak = yes
```

```
482.sphinx3: -xAVX -ipo -O3 -no-prec-div -unroll12 -ansi-alias  
             -parallel
```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY CX250 S2, Intel Xeon E5-2640 v2, 2.00 GHz

SPECfp2006 = 78.3

SPECfp_base2006 = 75.4

CPU2006 license: 19

Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: Jan-2014

Hardware Availability: Sep-2013

Software Availability: Sep-2013

Peak Optimization Flags (Continued)

C++ benchmarks:

```
444.namd: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
           -no-prec-div(pass 2) -prof-use(pass 2) -fno-alias
           -auto-ilp32

447.dealII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
            -no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -ansi-alias
```

Fortran benchmarks:

```
410.bwaves: basepeak = yes

416.gamess: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
             -no-prec-div(pass 2) -prof-use(pass 2) -unroll2
             -inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
               -no-prec-div(pass 2) -prof-use(pass 2) -unroll2
               -inline-level=0 -opt-prefetch -parallel

465.tonto: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
            -no-prec-div(pass 2) -prof-use(pass 2) -inline-calloc
            -opt-malloc-options=3 -auto -unroll4
```

Benchmarks using both Fortran and C:

```
435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

454.calculix: -xAVX -ipo -O3 -no-prec-div -auto-ilp32 -ansi-alias

481.wrf: basepeak = yes
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.html>
<http://www.spec.org/cpu2006/flags/Fujitsu-Platform.20131009.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.xml>
<http://www.spec.org/cpu2006/flags/Fujitsu-Platform.20131009.xml>



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY CX250 S2, Intel Xeon E5-2640 v2, 2.00 GHz

SPECfp2006 = 78.3

SPECfp_base2006 = 75.4

CPU2006 license: 19

Test date: Jan-2014

Test sponsor: Fujitsu

Hardware Availability: Sep-2013

Tested by: Fujitsu

Software Availability: Sep-2013

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.

Report generated on Thu Jul 24 20:00:02 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 25 February 2014.