



# SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## NEC Corporation

**SPECfp®2006 = 47.4**

### Express5800/GT110f (Intel Celeron G1820)

**SPECfp\_base2006 = 46.9**

CPU2006 license: 9006


Test sponsor: NEC Corporation

Tested by: NEC Corporation

Test date: Jan-2014

Hardware Availability: Jan-2014

Software Availability: Sep-2013

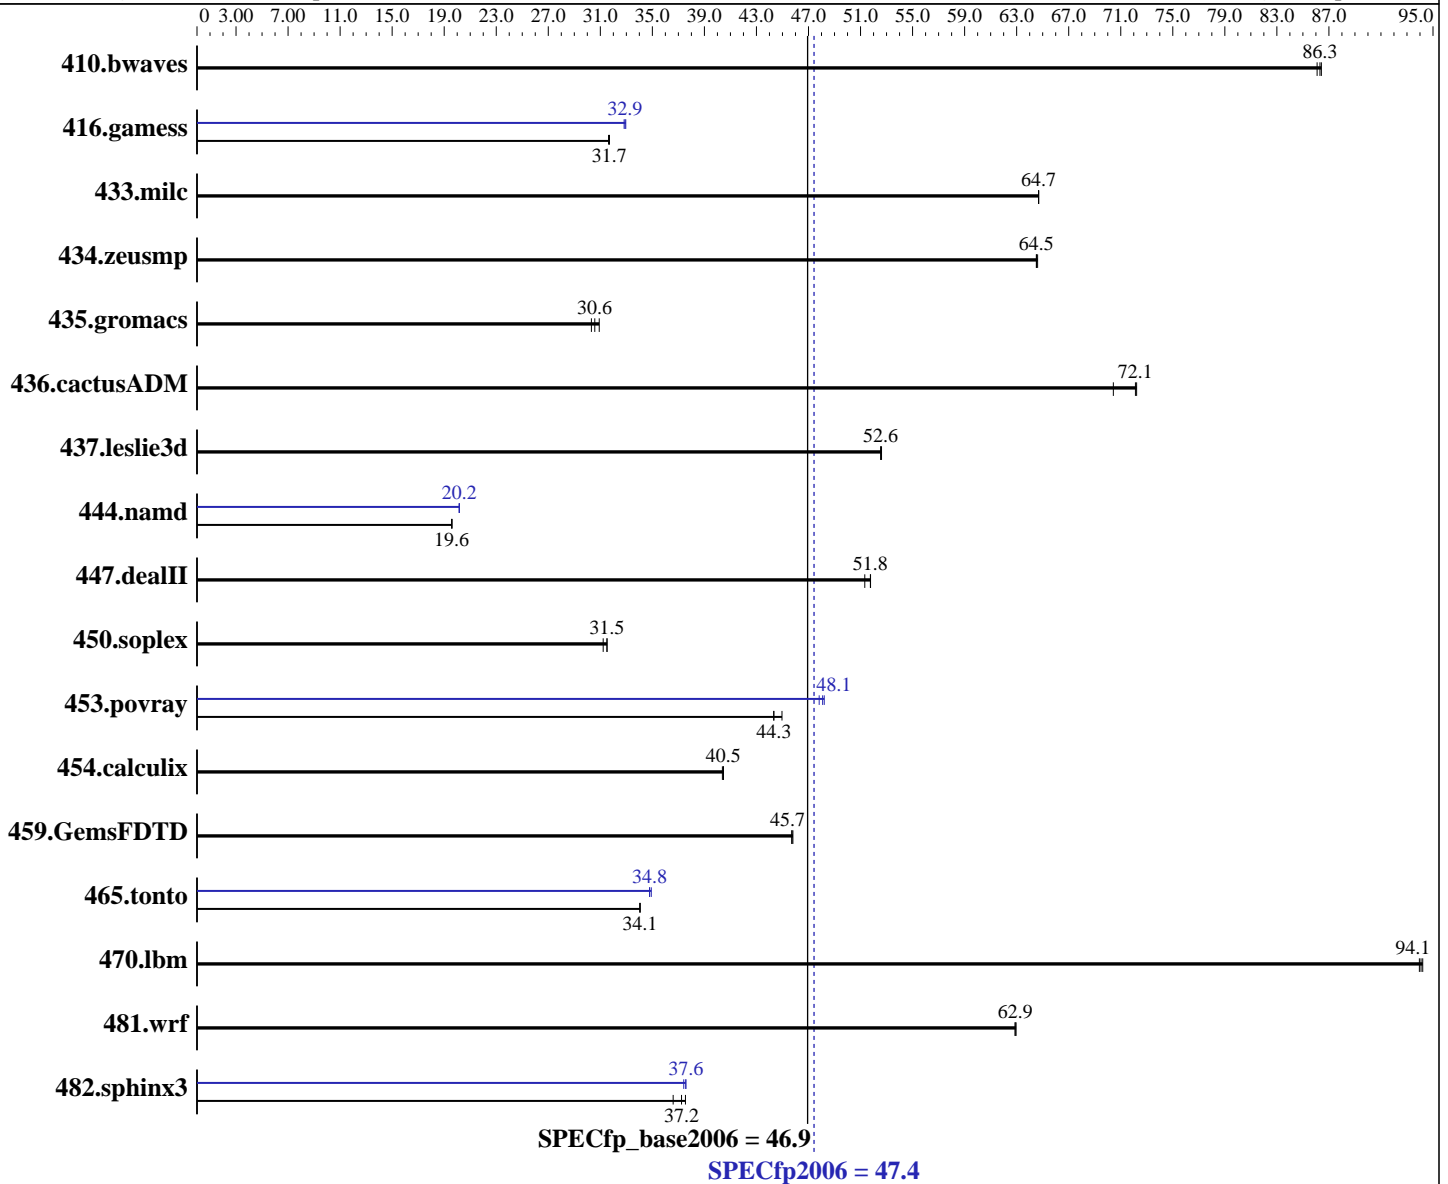

#### Hardware

CPU Name: Intel Celeron G1820  
 CPU Characteristics:  
 CPU MHz: 2700  
 FPU: Integrated  
 CPU(s) enabled: 2 cores, 1 chip, 2 cores/chip  
 CPU(s) orderable: 1 chip  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

#### Software

Operating System: Red Hat Enterprise Linux Server release 6.4 (Santiago)  
 Kernel 2.6.32-358.18.1.el6.x86\_64  
 Compiler: C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux;  
 Fortran: Version 14.0.0.080 of Intel Fortran Studio XE for Linux  
 Auto Parallel: Yes  
 File System: ext4

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## NEC Corporation

SPECfp2006 = **47.4**

## Express5800/GT110f (Intel Celeron G1820)

SPECfp\_base2006 = **46.9**

CPU2006 license: 9006

Test sponsor: NEC Corporation

Tested by: NEC Corporation

Test date: Jan-2014

Hardware Availability: Jan-2014

Software Availability: Sep-2013

L3 Cache: 2 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 16 GB (2 x 8 GB 2Rx8 PC3L-12800E-11, ECC, running at 1333 MHz and CL9)  
 Disk Subsystem: 1 x 500 GB SATA, 7200 RPM  
 Other Hardware: None

System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 32/64-bit  
 Other Software: None

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	158	86.1	<b>157</b>	<b>86.3</b>	157	86.4	158	86.1	<b>157</b>	<b>86.3</b>	157	86.4
416.gamess	<b>618</b>	<b>31.7</b>	618	31.7	619	31.6	<b>595</b>	<b>32.9</b>	594	33.0	596	32.8
433.milc	142	64.7	<b>142</b>	<b>64.7</b>	142	64.7	142	64.7	<b>142</b>	<b>64.7</b>	142	64.7
434.zeusmp	141	64.6	141	64.5	<b>141</b>	<b>64.5</b>	141	64.6	141	64.5	<b>141</b>	<b>64.5</b>
435.gromacs	<b>234</b>	<b>30.6</b>	236	30.3	231	30.9	<b>234</b>	<b>30.6</b>	236	30.3	231	30.9
436.cactusADM	165	72.2	170	70.4	<b>166</b>	<b>72.1</b>	165	72.2	170	70.4	<b>166</b>	<b>72.1</b>
437.leslie3d	179	52.6	179	52.6	<b>179</b>	<b>52.6</b>	179	52.6	179	52.6	<b>179</b>	<b>52.6</b>
444.namd	409	19.6	<b>409</b>	<b>19.6</b>	410	19.6	<b>398</b>	<b>20.2</b>	398	20.2	398	20.2
447.dealII	221	51.8	<b>221</b>	<b>51.8</b>	223	51.3	221	51.8	<b>221</b>	<b>51.8</b>	223	51.3
450.soplex	267	31.2	<b>265</b>	<b>31.5</b>	265	31.5	267	31.2	<b>265</b>	<b>31.5</b>	265	31.5
453.povray	120	44.3	<b>120</b>	<b>44.3</b>	118	45.0	110	48.2	<b>111</b>	<b>48.1</b>	111	47.8
454.calculix	<b>204</b>	<b>40.5</b>	204	40.5	204	40.4	<b>204</b>	<b>40.5</b>	204	40.5	204	40.4
459.GemsFDTD	232	45.7	<b>232</b>	<b>45.7</b>	232	45.8	232	45.7	<b>232</b>	<b>45.7</b>	232	45.8
465.tonto	289	34.0	289	34.1	<b>289</b>	<b>34.1</b>	283	34.8	282	34.9	<b>283</b>	<b>34.8</b>
470.lbm	146	94.2	<b>146</b>	<b>94.1</b>	146	94.0	146	94.2	<b>146</b>	<b>94.1</b>	146	94.0
481.wrf	177	63.0	<b>178</b>	<b>62.9</b>	178	62.9	177	63.0	<b>178</b>	<b>62.9</b>	178	62.9
482.sphinx3	<b>523</b>	<b>37.2</b>	519	37.5	533	36.6	<b>519</b>	<b>37.6</b>	521	37.4	519	37.6

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

BIOS Settings:  
Energy Performance: Performance

## General Notes

Environment variables set by runspec before the start of the run:  
 KMP\_AFFINITY = "granularity=fine,compact,1,0"  
 LD\_LIBRARY\_PATH = "/home/cpu2006/libs/32:/home/cpu2006/libs/64:/home/cpu2006/sh"  
 OMP\_NUM\_THREADS = "2"

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

SPECfp2006 = 47.4

Express5800/GT110f (Intel Celeron G1820)

SPECfp\_base2006 = 46.9

CPU2006 license: 9006

Test date: Jan-2014

Test sponsor: NEC Corporation

Hardware Availability: Jan-2014

Tested by: NEC Corporation

Software Availability: Sep-2013

## General Notes (Continued)

Added glibc-static-2.12-1.107.el6.x86\_64.rpm  
to enable static linking  
Transparent Huge Pages enabled with:  
echo always > /sys/kernel/mm/redhat\_transparent\_hugepage/enabled

## Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.deallI: -DSPEC\_CPU\_LP64  
450.soplex: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
482.sphinx3: -DSPEC\_CPU\_LP64

## Base Optimization Flags

C benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch  
-ansi-alias

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

SPECfp2006 = 47.4

Express5800/GT110f (Intel Celeron G1820)

SPECfp\_base2006 = 46.9

CPU2006 license: 9006

Test date: Jan-2014

Test sponsor: NEC Corporation

Hardware Availability: Jan-2014

Tested by: NEC Corporation

Software Availability: Sep-2013

## Base Optimization Flags (Continued)

C++ benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch -ansi-alias

Fortran benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

Benchmarks using both Fortran and C:

-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch  
-ansi-alias

## Peak Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: basepeak = yes

482.sphinx3: -xSSE4.2 -ipo -O3 -no-prec-div -unroll2 -ansi-alias  
-parallel

C++ benchmarks:

444.namd: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -fno-alias  
-auto-ilp32

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

SPECfp2006 = 47.4

Express5800/GT110f (Intel Celeron G1820)

SPECfp\_base2006 = 46.9

CPU2006 license: 9006

Test date: Jan-2014

Test sponsor: NEC Corporation

Hardware Availability: Jan-2014

Tested by: NEC Corporation

Software Availability: Sep-2013

## Peak Optimization Flags (Continued)

447.dealll: basepeak = yes

450.soplex: basepeak = yes

453.povray: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -ansi-alias

### Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2  
-inline-level=0 -scalar-rep- -static

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: basepeak = yes

465.tonto: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -inline-calloc  
-opt-malloc-options=3 -auto -unroll4

### Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.html>  
<http://www.spec.org/cpu2006/flags/NEC-Platform-Settings-V1.2-R120-RevB.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.xml>  
<http://www.spec.org/cpu2006/flags/NEC-Platform-Settings-V1.2-R120-RevB.xml>



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

SPECfp2006 = 47.4

Express5800/GT110f (Intel Celeron G1820)

SPECfp\_base2006 = 46.9

CPU2006 license: 9006

Test sponsor: NEC Corporation

Tested by: NEC Corporation

Test date: Jan-2014

Hardware Availability: Jan-2014

Software Availability: Sep-2013

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Thu Jul 24 19:58:03 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 25 February 2014.