



# SPEC<sup>®</sup> CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Dell Inc.

SPECfp<sup>®</sup>\_rate2006 = 1550

PowerEdge R920 (Intel Xeon E7-8880L v2, 2.20 GHz)

SPECfp\_rate\_base2006 = 1510

CPU2006 license: 55


Test date: Jan-2014

Test sponsor: Dell Inc.

Hardware Availability: Mar-2014

Tested by: Dell Inc.

Software Availability: Mar-2014

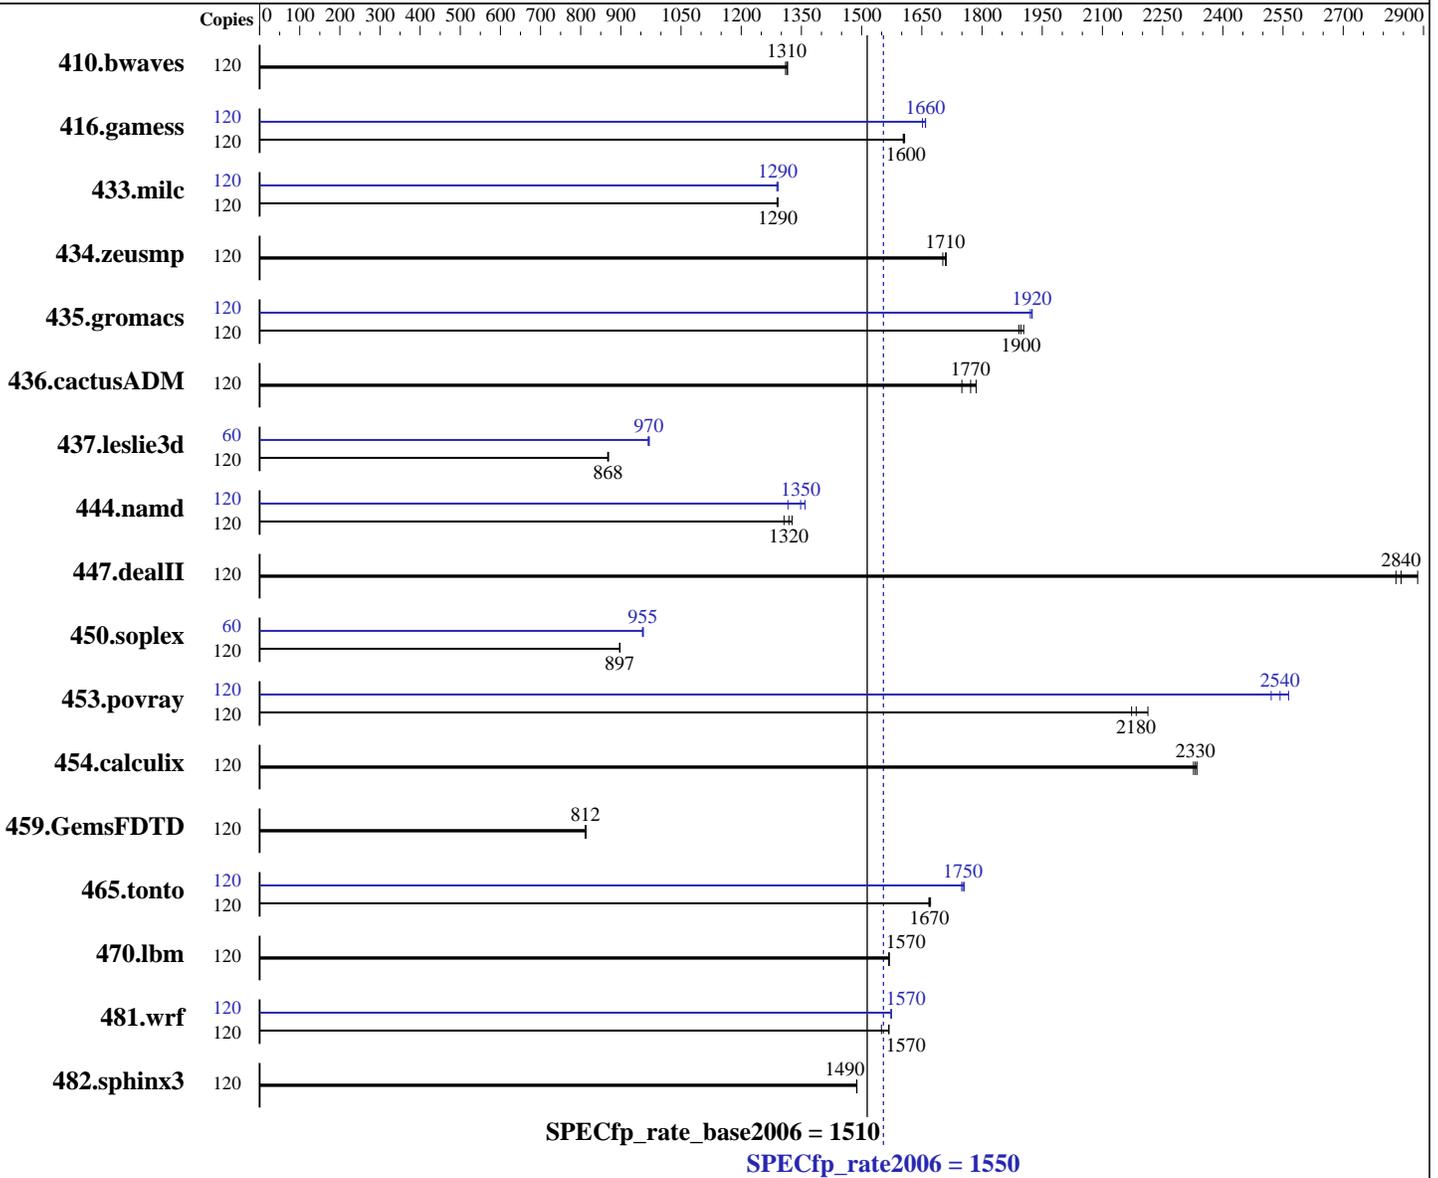

### Hardware

CPU Name: Intel Xeon E7-8880L v2  
 CPU Characteristics: Intel Turbo Boost Technology up to 2.80 GHz  
 CPU MHz: 2200  
 FPU: Integrated  
 CPU(s) enabled: 60 cores, 4 chips, 15 cores/chip, 2 threads/core  
 CPU(s) orderable: 2,4 chip  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

### Software

Operating System: SUSE Linux Enterprise Server 11 (x86\_64)  
 3.0.76-0.11-default  
 Compiler: C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux;  
 Fortran: Version 14.0.0.080 of Intel Fortran Studio XE for Linux  
 Auto Parallel: No  
 File System: ext2  
 System State: Run level 3 (multi-user)

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp\_rate2006 = 1550

PowerEdge R920 (Intel Xeon E7-8880L v2, 2.20 GHz)

SPECfp\_rate\_base2006 = 1510

CPU2006 license: 55

Test date: Jan-2014

Test sponsor: Dell Inc.

Hardware Availability: Mar-2014

Tested by: Dell Inc.

Software Availability: Mar-2014

L3 Cache: 37.5 MB I+D on chip per chip  
Other Cache: None  
Memory: 1 TB (58 x 16 GB 2Rx4 PC3L-12800R-11 + 6 x 16 GB 2Rx4 PC3-14900R-13, ECC)  
Disk Subsystem: 1 x 400 GB SAS6 SSD  
Other Hardware: None

Base Pointers: 32/64-bit  
Peak Pointers: 32/64-bit  
Other Software: None

## Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio		
410.bwaves	120	1244	1310	<b>1241</b>	<b>1310</b>	1239	1320	120	1244	1310	<b>1241</b>	<b>1310</b>	1239	1320		
416.gamess	120	1465	1600	<b>1464</b>	<b>1600</b>	1462	1610	120	<b>1416</b>	<b>1660</b>	1423	1650	1416	1660		
433.milc	120	<b>853</b>	<b>1290</b>	854	1290	853	1290	120	<b>853</b>	<b>1290</b>	853	1290	855	1290		
434.zeusmp	120	638	1710	<b>639</b>	<b>1710</b>	641	1700	120	638	1710	<b>639</b>	<b>1710</b>	641	1700		
435.gromacs	120	450	1900	<b>452</b>	<b>1900</b>	453	1890	120	445	1930	446	1920	<b>445</b>	<b>1920</b>		
436.cactusADM	120	<b>809</b>	<b>1770</b>	820	1750	803	1790	120	<b>809</b>	<b>1770</b>	820	1750	803	1790		
437.leslie3d	120	<b>1299</b>	<b>868</b>	1301	867	1297	869	60	<b>581</b>	<b>970</b>	581	971	583	968		
444.namd	120	737	1310	<b>730</b>	<b>1320</b>	725	1330	120	708	1360	731	1320	<b>714</b>	<b>1350</b>		
447.dealII	120	476	2890	<b>483</b>	<b>2840</b>	485	2830	120	476	2890	<b>483</b>	<b>2840</b>	485	2830		
450.soplex	120	1114	898	1116	897	<b>1115</b>	<b>897</b>	60	523	956	525	954	<b>524</b>	<b>955</b>		
453.povray	120	294	2170	<b>292</b>	<b>2180</b>	288	2210	120	<b>251</b>	<b>2540</b>	253	2520	249	2560		
454.calculix	120	424	2340	425	2330	<b>425</b>	<b>2330</b>	120	424	2340	425	2330	<b>425</b>	<b>2330</b>		
459.GemsFDTD	120	<b>1569</b>	<b>812</b>	1565	814	1569	811	120	<b>1569</b>	<b>812</b>	1565	814	1569	811		
465.tonto	120	706	1670	708	1670	<b>708</b>	<b>1670</b>	120	<b>674</b>	<b>1750</b>	675	1750	673	1760		
470.lbm	120	<b>1051</b>	<b>1570</b>	1051	1570	1051	1570	120	<b>1051</b>	<b>1570</b>	1051	1570	1051	1570		
481.wrf	120	865	1550	855	1570	<b>855</b>	<b>1570</b>	120	852	1570	<b>852</b>	<b>1570</b>	852	1570		
482.sphinx3	120	1571	1490	1572	1490	<b>1572</b>	<b>1490</b>	120	1571	1490	1572	1490	<b>1572</b>	<b>1490</b>		

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

BIOS settings:  
Virtualization Technology disabled  
Execute Disable disabled

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp\_rate2006 = 1550

PowerEdge R920 (Intel Xeon E7-8880L v2, 2.20 GHz)

SPECfp\_rate\_base2006 = 1510

CPU2006 license: 55

Test date: Jan-2014

Test sponsor: Dell Inc.

Hardware Availability: Mar-2014

Tested by: Dell Inc.

Software Availability: Mar-2014

## Platform Notes (Continued)

System Profile set to Custom  
 Memory Patrol Scrub set to disabled  
 Sysinfo program  
 /root/Desktop/Performance/ic14.0\_Oct17\_2013/config/sysinfo.rev6818  
 \$Rev: 6818 \$ \$Date:: 2012-07-17 #\$ e86d102572650a6e4d596a3cee98f191  
 running on slesperf2 Thu Jan 23 16:24:09 2014

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:  
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name      : Intel(R) Xeon(R) CPU E7-8880L v2 @ 2.20GHz
 4 "physical id"s (chips)
 120 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
  cpu cores    : 15
  siblings     : 30
  physical 0: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14
  physical 1: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14
  physical 2: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14
  physical 3: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14
cache size     : 38400 KB
```

```
From /proc/meminfo
MemTotal:      1058789108 kB
HugePages_Total: 0
Hugepagesize:  2048 kB
```

```
/usr/bin/lsb_release -d
SUSE Linux Enterprise Server 11 (x86_64)
```

```
From /etc/*release* /etc/*version*
SuSE-release:
SUSE Linux Enterprise Server 11 (x86_64)
VERSION = 11
PATCHLEVEL = 3
```

```
uname -a:
Linux slesperf2 3.0.76-0.11-default #1 SMP Fri Jun 14 08:21:43 UTC 2013
(ccab990) x86_64 x86_64 x86_64 GNU/Linux
```

run-level 3 Jan 23 16:13 last=S

```
SPEC is set to: /root/Desktop/Performance/ic14.0_Oct17_2013
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda2        ext2  365G  190G  174G  53% /
```

Additional information from dmidecode:  
 BIOS Dell Inc. 1.0.0 12/16/2013

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp\_rate2006 = 1550

PowerEdge R920 (Intel Xeon E7-8880L v2, 2.20 GHz)

SPECfp\_rate\_base2006 = 1510

CPU2006 license: 55

Test date: Jan-2014

Test sponsor: Dell Inc.

Hardware Availability: Mar-2014

Tested by: Dell Inc.

Software Availability: Mar-2014

## Platform Notes (Continued)

### Memory:

41x 00CE00B300CE M393B2G70BH0-YK0 16 GB 1333 MHz  
 6x 00CE00B300CE M393B2G70CB0-CMA 16 GB 1333 MHz  
 11x 00CE04B300CE M393B2G70BH0-YK0 16 GB 1333 MHz  
 6x 00CE04B300CE M393B2G70CB0-YK0 16 GB 1333 MHz

(End of data from sysinfo program)

Regarding the sysinfo display about the memory installed, although the information is accurate, two different types of DIMMs were used in the configuration and it may not be easy to immediately tell the difference. The following has been provided to help make the situation more clear.

DIMMs with "M393B2G70BH0-YK0" in the name are 16 GB PC3L-12800R-11 DIMMs  
 DIMMs with "M393B2G70CB0-CMA" in the name are 16 GB PC3-14900R-13 DIMMs

## General Notes

Environment variables set by runspec before the start of the run:

LD\_LIBRARY\_PATH = \*/root/Desktop/Performance/ic14.0\_Oct17\_2013/libs/32:/root/Desktop/Performance/ic14.0\_Oct17\_2013/libs/64:/root/Desktop/Performance/ic14.0\_Oct17\_2013/sh\*

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB memory using RedHat EL 6.4

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/transparent\_hugepage/enabled

Filesystem page cache cleared with:

echo 1> /proc/sys/vm/drop\_caches

runspec command invoked through numactl i.e.:

numactl --interleave=all runspec <etc>

## Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64

416.gamess: -DSPEC\_CPU\_LP64

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

http://www.spec.org/



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp\_rate2006 = 1550

PowerEdge R920 (Intel Xeon E7-8880L v2, 2.20 GHz)

SPECfp\_rate\_base2006 = 1510

CPU2006 license: 55

Test date: Jan-2014

Test sponsor: Dell Inc.

Hardware Availability: Mar-2014

Tested by: Dell Inc.

Software Availability: Mar-2014

## Base Portability Flags (Continued)

```

433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

```

## Base Optimization Flags

C benchmarks:  
 -xAVX -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -ansi-alias  
 -opt-mem-layout-trans=3

C++ benchmarks:  
 -xAVX -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -ansi-alias  
 -opt-mem-layout-trans=3

Fortran benchmarks:  
 -xAVX -ipo -O3 -no-prec-div -opt-prefetch

Benchmarks using both Fortran and C:  
 -xAVX -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -ansi-alias  
 -opt-mem-layout-trans=3

## Peak Compiler Invocation

C benchmarks:  
 icc -m64

C++ benchmarks (except as noted below):  
 icpc -m64

450.soplex: icpc -m32

Fortran benchmarks:  
 ifort -m64

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp\_rate2006 = 1550

PowerEdge R920 (Intel Xeon E7-8880L v2, 2.20 GHz)

SPECfp\_rate\_base2006 = 1510

CPU2006 license: 55

Test date: Jan-2014

Test sponsor: Dell Inc.

Hardware Availability: Mar-2014

Tested by: Dell Inc.

Software Availability: Mar-2014

## Peak Compiler Invocation (Continued)

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Peak Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
 416.gamess: -DSPEC\_CPU\_LP64  
 433.milc: -DSPEC\_CPU\_LP64  
 434.zeusmp: -DSPEC\_CPU\_LP64  
 435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
 436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
 437.leslie3d: -DSPEC\_CPU\_LP64  
 444.namd: -DSPEC\_CPU\_LP64  
 447.dealII: -DSPEC\_CPU\_LP64  
 453.povray: -DSPEC\_CPU\_LP64  
 454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
 459.GemsFDTD: -DSPEC\_CPU\_LP64  
 465.tonto: -DSPEC\_CPU\_LP64  
 470.lbm: -DSPEC\_CPU\_LP64  
 481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
 482.sphinx3: -DSPEC\_CPU\_LP64

## Peak Optimization Flags

C benchmarks:

433.milc: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
 -no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)  
 -prof-use(pass 2) -auto-ilp32

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

444.namd: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
 -no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)  
 -prof-use(pass 2) -fno-alias -auto-ilp32

447.dealII: basepeak = yes

450.soplex: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
 -no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)  
 -prof-use(pass 2) -opt-malloc-options=3

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp\_rate2006 = 1550

PowerEdge R920 (Intel Xeon E7-8880L v2, 2.20 GHz)

SPECfp\_rate\_base2006 = 1510

CPU2006 license: 55

Test date: Jan-2014

Test sponsor: Dell Inc.

Hardware Availability: Mar-2014

Tested by: Dell Inc.

Software Availability: Mar-2014

## Peak Optimization Flags (Continued)

453.povray: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)  
-prof-use(pass 2) -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2  
-inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: -xAVX -ipo -O3 -no-prec-div -opt-prefetch

459.GemsFDTD: basepeak = yes

465.tonto: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -auto  
-inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)  
-prof-use(pass 2) -opt-prefetch -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: -xAVX -ipo -O3 -no-prec-div -auto-ilp32

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.html>

<http://www.spec.org/cpu2006/flags/Dell-Platform-Settings-V1.2-revC.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.xml>

<http://www.spec.org/cpu2006/flags/Dell-Platform-Settings-V1.2-revC.xml>



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp\_rate2006 = 1550

PowerEdge R920 (Intel Xeon E7-8880L v2, 2.20 GHz)

SPECfp\_rate\_base2006 = 1510

CPU2006 license: 55

Test sponsor: Dell Inc.

Tested by: Dell Inc.

Test date: Jan-2014

Hardware Availability: Mar-2014

Software Availability: Mar-2014

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Thu Jul 24 21:45:54 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 11 March 2014.