



SPEC[®] CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECfp[®]2006 = 114

ProLiant DL580 Gen8
(3.20 GHz, Intel Xeon E7-8891 v2)

SPECfp_base2006 = 108

CPU2006 license: 3


Test date: Feb-2014

Test sponsor: Hewlett-Packard Company

Hardware Availability: Feb-2014

Tested by: Hewlett-Packard Company

Software Availability: Sep-2013

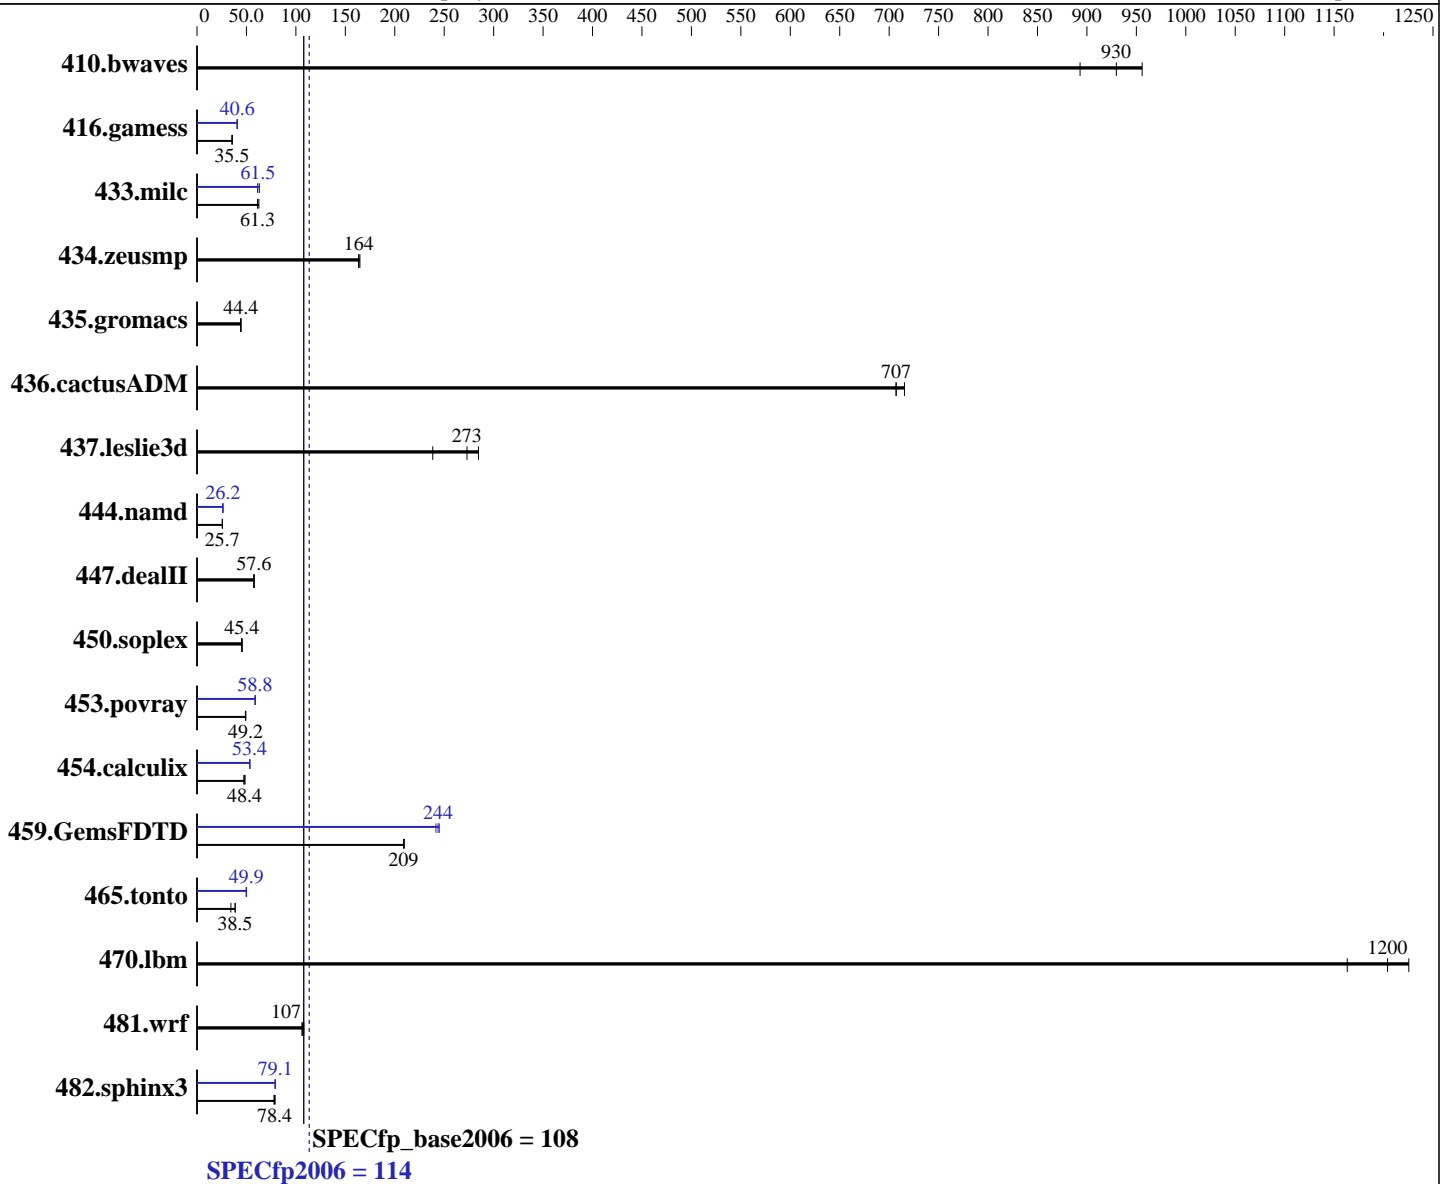

Hardware

CPU Name: Intel Xeon E7-8891 v2
 CPU Characteristics: Intel Turbo Boost Technology up to 3.70 GHz
 CPU MHz: 3200
 FPU: Integrated
 CPU(s) enabled: 40 cores, 4 chips, 10 cores/chip
 CPU(s) orderable: 2,4 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

Software

Operating System: SUSE Linux Enterprise Server 11 (x86_64) SP3
 Kernel 3.0.76-0.11-default
 Compiler: C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux;
 Fortran: Version 14.0.0.080 of Intel Fortran Studio XE for Linux
 Auto Parallel: Yes
 File System: ext3
 System State: Run level 3 (multi-user)

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECfp2006 = **114**

ProLiant DL580 Gen8
(3.20 GHz, Intel Xeon E7-8891 v2)

SPECfp_base2006 = **108**

CPU2006 license: 3	Test date: Feb-2014
Test sponsor: Hewlett-Packard Company	Hardware Availability: Feb-2014
Tested by: Hewlett-Packard Company	Software Availability: Sep-2013

L3 Cache: 37.5 MB I+D on chip per chip
 Other Cache: None
 Memory: 1 TB (64 x 16 GB 2Rx4 PC3-14900R-13, ECC, running at 1333 MHz and CL9)
 Disk Subsystem: 2 x 500 GB SAS, 10 K RPM, RAID 1
 Other Hardware: None

Base Pointers: 64-bit
 Peak Pointers: 32/64-bit
 Other Software: None

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	14.2	956	15.2	893	14.6	930	14.2	956	15.2	893	14.6	930
416.gamess	552	35.5	551	35.5	551	35.6	481	40.7	482	40.6	482	40.6
433.milc	147	62.6	150	61.3	150	61.3	145	63.2	150	61.3	149	61.5
434.zeusmp	55.6	164	55.6	164	55.2	165	55.6	164	55.6	164	55.2	165
435.gromacs	162	44.2	161	44.5	161	44.4	162	44.2	161	44.5	161	44.4
436.cactusADM	16.7	715	16.9	707	16.9	707	16.7	715	16.9	707	16.9	707
437.leslie3d	33.0	285	39.4	238	34.4	273	33.0	285	39.4	238	34.4	273
444.namd	312	25.7	312	25.7	312	25.7	306	26.2	306	26.2	306	26.2
447.dealII	200	57.3	198	57.6	198	57.9	200	57.3	198	57.6	198	57.9
450.soplex	184	45.4	185	45.2	182	45.7	184	45.4	185	45.2	182	45.7
453.povray	109	49.0	108	49.2	108	49.3	90.1	59.0	90.5	58.8	90.6	58.7
454.calculix	174	47.3	170	48.4	171	48.4	154	53.4	154	53.4	155	53.4
459.GemsFDTD	50.8	209	50.6	210	50.8	209	43.3	245	43.5	244	43.9	242
465.tonto	287	34.3	255	38.5	255	38.6	196	50.1	198	49.8	197	49.9
470.lbm	11.4	1200	11.2	1230	11.8	1160	11.4	1200	11.2	1230	11.8	1160
481.wrf	105	106	103	108	105	107	105	106	103	108	105	107
482.sphinx3	250	77.9	249	78.4	247	79.0	246	79.1	245	79.4	247	78.8

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"
 Transparent Huge Pages enabled with:
 echo always > /sys/kernel/mm/transparent_hugepage/enabled

Platform Notes

BIOS Configuration:
 HP Power Profile was set to Maximum Performance
 Intel Minimum Processor Idle Power State was set to C6 State
 Intel Minimum Processor Idle Power Package State was set to Package C6 State
 Intel Hyperthreading Options was set to Disabled
 Memory Double Refresh Rate was set to Disabled
 Processor Power and Utilization Monitoring was set to Disabled

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECfp2006 = 114

ProLiant DL580 Gen8
(3.20 GHz, Intel Xeon E7-8891 v2)

SPECfp_base2006 = 108

CPU2006 license: 3
Test sponsor: Hewlett-Packard Company
Tested by: Hewlett-Packard Company

Test date: Feb-2014
Hardware Availability: Feb-2014
Software Availability: Sep-2013

Platform Notes (Continued)

Memory Patrol Scrubbing was set to "Disabled"
Sysinfo program /home/cpu2006/config/sysinfo.rev6874.hp
\$Rev: 6874 \$ \$Date:: 2013-11-20 #\$ e05b96ddac6c3d74bfe176502a0a2391
running on dl580-rwen Sat Feb 22 06:59:39 2014

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E7-8891 v2 @ 3.20GHz
 4 "physical id"s (chips)
 40 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
  cpu cores : 10
  siblings  : 10
  physical 0: cores 2 3 4 5 6 7 8 10 11 12
  physical 1: cores 2 3 4 5 6 7 8 10 11 12
  physical 2: cores 2 3 4 5 6 7 8 10 11 12
  physical 3: cores 2 3 4 5 6 7 8 10 11 12
cache size : 38400 KB
```

```
From /proc/meminfo
MemTotal:      1058730268 kB
HugePages_Total:      0
Hugepagesize:    2048 kB
```

```
/usr/bin/lsb_release -d
SUSE Linux Enterprise Server 11 (x86_64)
```

```
From /etc/*release* /etc/*version*
SuSE-release:
SUSE Linux Enterprise Server 11 (x86_64)
VERSION = 11
PATCHLEVEL = 3
```

```
uname -a:
Linux dl580-rwen 3.0.76-0.11-default #1 SMP Fri Jun 14 08:21:43 UTC 2013
(ccab990) x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 Feb 21 20:20 last=S
```

```
SPEC is set to: /home/cpu2006
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sdb3       ext3  275G  8.7G  265G   4% /
```

Additional information from dmidecode:

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECfp2006 = 114

ProLiant DL580 Gen8
(3.20 GHz, Intel Xeon E7-8891 v2)

SPECfp_base2006 = 108

CPU2006 license: 3

Test date: Feb-2014

Test sponsor: Hewlett-Packard Company

Hardware Availability: Feb-2014

Tested by: Hewlett-Packard Company

Software Availability: Sep-2013

Platform Notes (Continued)

hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS HP P79 02/14/2014

Memory:

64x HP 712383-081 16 GB 1866 MHz, configured at 1333 MHz

32x UNKNOWN NOT AVAILABLE

(End of data from sysinfo program)

Regarding the sysinfo display about the memory installed, the correct amount of memory is 1 TB and the dmidecode description should have one line reading as:

64x HP 712383-081 16 GB 1866 MHz, configured at 1333 MHz

General Notes

Environment variables set by runspec before the start of the run:

KMP_AFFINITY = "granularity=fine,compact"

LD_LIBRARY_PATH = "/home/cpu2006/libs/32:/home/cpu2006/libs/64:/home/cpu2006/sh"

OMP_NUM_THREADS = "40"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB memory using RedHat EL 6.4

Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64

416.gamess: -DSPEC_CPU_LP64

433.milc: -DSPEC_CPU_LP64

434.zeusmp: -DSPEC_CPU_LP64

435.gromacs: -DSPEC_CPU_LP64 -nofor_main

436.cactusADM: -DSPEC_CPU_LP64 -nofor_main

437.leslie3d: -DSPEC_CPU_LP64

444.namd: -DSPEC_CPU_LP64

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

http://www.spec.org/

Page 4



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECfp2006 = 114

ProLiant DL580 Gen8
(3.20 GHz, Intel Xeon E7-8891 v2)

SPECfp_base2006 = 108

CPU2006 license: 3

Test date: Feb-2014

Test sponsor: Hewlett-Packard Company

Hardware Availability: Feb-2014

Tested by: Hewlett-Packard Company

Software Availability: Sep-2013

Base Portability Flags (Continued)

```

447.deallI: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

```

Base Optimization Flags

C benchmarks:
-xAVX -ipo -O3 -no-prec-div -parallel -opt-prefetch -ansi-alias

C++ benchmarks:
-xAVX -ipo -O3 -no-prec-div -opt-prefetch -ansi-alias

Fortran benchmarks:
-xAVX -ipo -O3 -no-prec-div -parallel -opt-prefetch

Benchmarks using both Fortran and C:
-xAVX -ipo -O3 -no-prec-div -parallel -opt-prefetch -ansi-alias

Peak Compiler Invocation

C benchmarks:
icc -m64

C++ benchmarks:
icpc -m64

Fortran benchmarks:
ifort -m64

Benchmarks using both Fortran and C:
icc -m64 ifort -m64

Peak Portability Flags

Same as Base Portability Flags



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECfp2006 = 114

ProLiant DL580 Gen8
(3.20 GHz, Intel Xeon E7-8891 v2)

SPECfp_base2006 = 108

CPU2006 license: 3

Test date: Feb-2014

Test sponsor: Hewlett-Packard Company

Hardware Availability: Feb-2014

Tested by: Hewlett-Packard Company

Software Availability: Sep-2013

Peak Optimization Flags

C benchmarks:

433.milc: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -auto-ilp32
-ansi-alias

470.lbm: basepeak = yes

482.sphinx3: -xAVX -ipo -O3 -no-prec-div -unroll2 -ansi-alias
-parallel

C++ benchmarks:

444.namd: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -fno-alias
-auto-ilp32

447.dealII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2
-inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2
-inline-level=0 -opt-prefetch -parallel

465.tonto: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -inline-calloc
-opt-malloc-options=3 -auto -unroll4

Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

ProLiant DL580 Gen8
(3.20 GHz, Intel Xeon E7-8891 v2)

SPECfp2006 = 114

SPECfp_base2006 = 108

CPU2006 license: 3

Test sponsor: Hewlett-Packard Company

Tested by: Hewlett-Packard Company

Test date: Feb-2014

Hardware Availability: Feb-2014

Software Availability: Sep-2013

Peak Optimization Flags (Continued)

454.calculix: -xAVX -ipo -O3 -no-prec-div -auto-ilp32 -ansi-alias

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.html>

<http://www.spec.org/cpu2006/flags/HP-Platform-Flags-Intel-V1.2-revB.20131009.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.xml>

<http://www.spec.org/cpu2006/flags/HP-Platform-Flags-Intel-V1.2-revB.20131009.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Thu Jul 24 21:24:05 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 11 March 2014.