



SPEC[®] CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECfp[®]_rate2006 = 1330

ProLiant BL660c Gen8
(2.40 GHz, Intel Xeon E5-4657L v2)

SPECfp_rate_base2006 = 1290

CPU2006 license: 3


Test sponsor: Hewlett-Packard Company

Tested by: Hewlett-Packard Company

Test date: Jan-2014

Hardware Availability: Mar-2014

Software Availability: Nov-2013

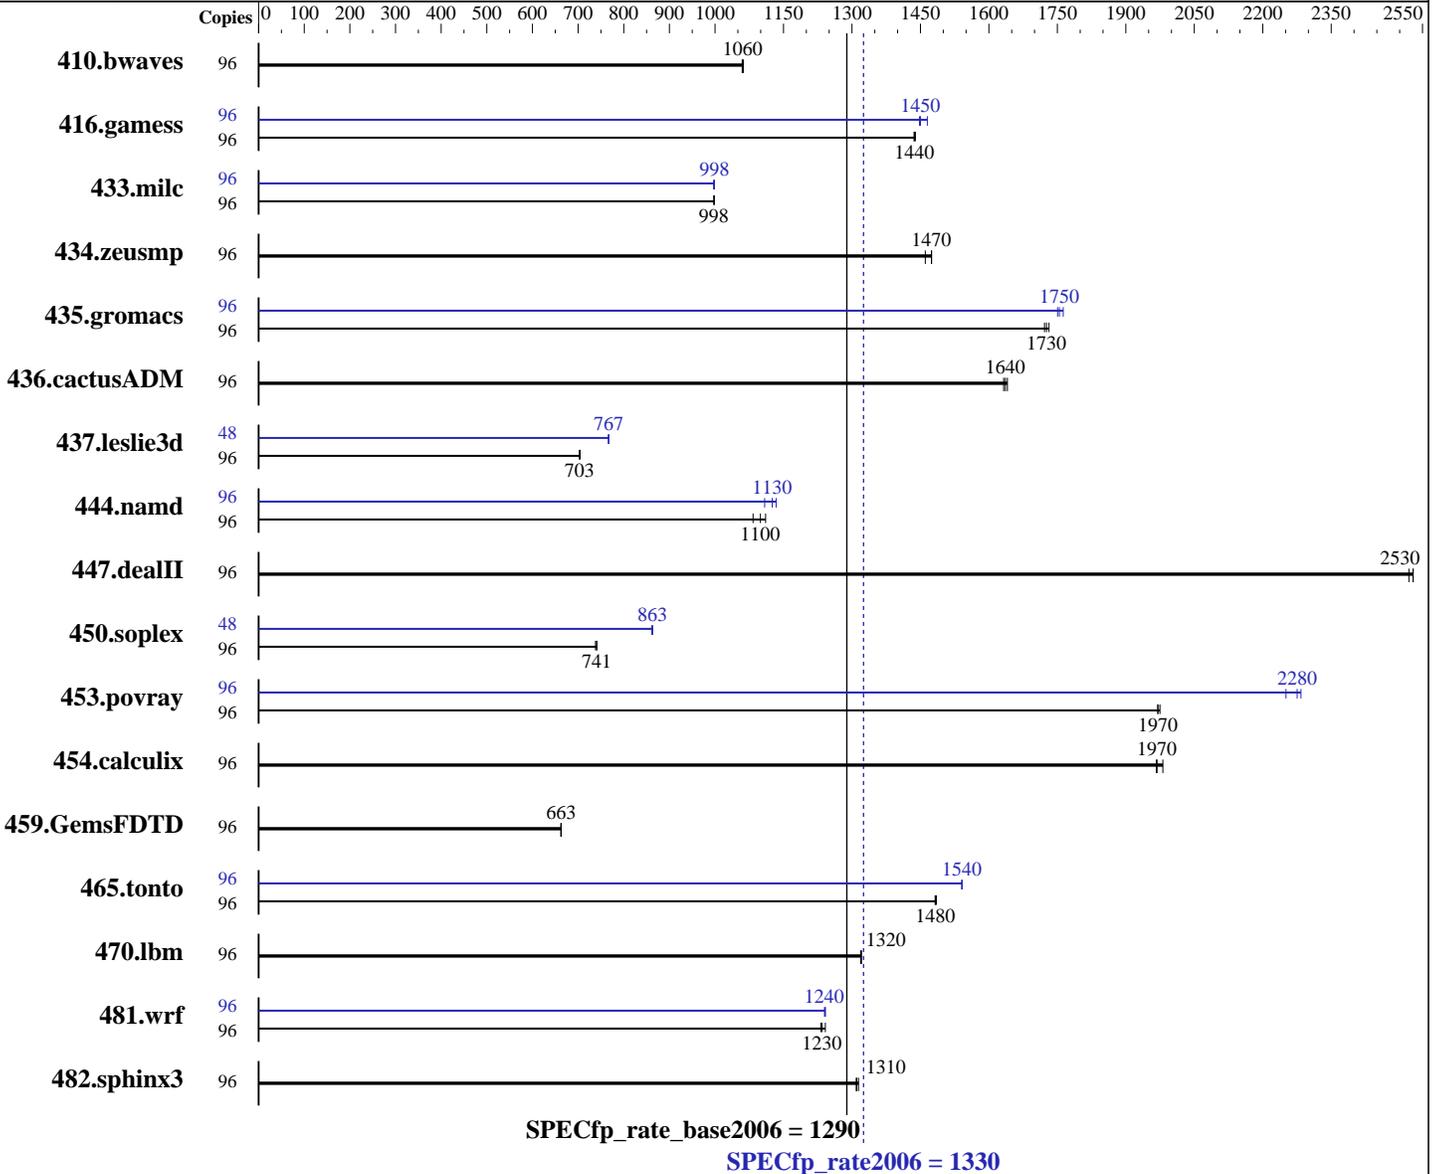

Hardware

CPU Name: Intel Xeon E5-4657L v2
 CPU Characteristics: Intel Turbo Boost Technology up to 2.90 GHz
 CPU MHz: 2400
 FPU: Integrated
 CPU(s) enabled: 48 cores, 4 chips, 12 cores/chip, 2 threads/core
 CPU(s) orderable: 2,4 chip
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

Software

Operating System: SUSE Linux Enterprise Server 11 (x86_64) SP3
 Kernel 3.0.76-0.11-default
 Compiler: C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux;
 Fortran: Version 14.0.0.080 of Intel Fortran Studio XE for Linux
 Auto Parallel: No
 File System: ext3
 System State: Run level 3 (multi-user)

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECfp_rate2006 = 1330

ProLiant BL660c Gen8
(2.40 GHz, Intel Xeon E5-4657L v2)

SPECfp_rate_base2006 = 1290

CPU2006 license: 3

Test date: Jan-2014

Test sponsor: Hewlett-Packard Company

Hardware Availability: Mar-2014

Tested by: Hewlett-Packard Company

Software Availability: Nov-2013

L3 Cache: 30 MB I+D on chip per chip
Other Cache: None
Memory: 256 GB (32 x 8 GB 2Rx4 PC3-14900R-13, ECC)
Disk Subsystem: 1 x 500 GB 7200 RPM SATA, RAID 0
Other Hardware: None

Base Pointers: 32/64-bit
Peak Pointers: 32/64-bit
Other Software: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	96	1229	1060	1231	1060	<u>1231</u>	<u>1060</u>	96	1229	1060	1231	1060	<u>1231</u>	<u>1060</u>
416.gamess	96	<u>1308</u>	<u>1440</u>	1309	1440	1306	1440	96	1283	1470	<u>1296</u>	<u>1450</u>	1298	1450
433.milc	96	883	998	883	998	<u>883</u>	<u>998</u>	96	884	997	<u>883</u>	<u>998</u>	883	999
434.zeusmp	96	<u>593</u>	<u>1470</u>	598	1460	593	1470	96	<u>593</u>	<u>1470</u>	598	1460	593	1470
435.gromacs	96	396	1730	<u>397</u>	<u>1730</u>	398	1720	96	<u>391</u>	<u>1750</u>	389	1760	392	1750
436.cactusADM	96	699	1640	703	1630	<u>701</u>	<u>1640</u>	96	699	1640	703	1630	<u>701</u>	<u>1640</u>
437.leslie3d	96	<u>1283</u>	<u>703</u>	1281	704	1284	703	48	588	767	<u>588</u>	<u>767</u>	589	766
444.namd	96	693	1110	<u>700</u>	<u>1100</u>	711	1080	96	679	1130	694	1110	<u>684</u>	<u>1130</u>
447.dealII	96	434	2530	<u>434</u>	<u>2530</u>	436	2520	96	434	2530	<u>434</u>	<u>2530</u>	436	2520
450.soplex	96	<u>1081</u>	<u>741</u>	1081	741	1085	738	48	<u>464</u>	<u>863</u>	465	861	464	863
453.povray	96	<u>259</u>	<u>1970</u>	259	1970	259	1970	96	224	2280	<u>224</u>	<u>2280</u>	227	2250
454.calculix	96	403	1970	<u>402</u>	<u>1970</u>	400	1980	96	403	1970	<u>402</u>	<u>1970</u>	400	1980
459.GemsFDTD	96	1538	662	1536	663	<u>1537</u>	<u>663</u>	96	1538	662	1536	663	<u>1537</u>	<u>663</u>
465.tonto	96	637	1480	636	1480	<u>637</u>	<u>1480</u>	96	613	1540	613	1540	<u>613</u>	<u>1540</u>
470.lbm	96	1000	1320	999	1320	<u>999</u>	<u>1320</u>	96	1000	1320	999	1320	<u>999</u>	<u>1320</u>
481.wrf	96	864	1240	<u>869</u>	<u>1230</u>	870	1230	96	<u>864</u>	<u>1240</u>	864	1240	865	1240
482.sphinx3	96	1424	1310	1429	1310	<u>1428</u>	<u>1310</u>	96	1424	1310	1429	1310	<u>1428</u>	<u>1310</u>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
Transparent Huge Pages enabled with:
echo always > /sys/kernel/mm/transparent_hugepage/enabled
Filesystem page cache cleared with:
echo 1 > /proc/sys/vm/drop_caches
runspec command invoked through numactl i.e.:
numactl --interleave=all runspec <etc>
```



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECfp_rate2006 = 1330

ProLiant BL660c Gen8
(2.40 GHz, Intel Xeon E5-4657L v2)

SPECfp_rate_base2006 = 1290

CPU2006 license: 3

Test date: Jan-2014

Test sponsor: Hewlett-Packard Company

Hardware Availability: Mar-2014

Tested by: Hewlett-Packard Company

Software Availability: Nov-2013

Platform Notes

BIOS Configuration:

HP Power Regulator was set to HP Static High Performance Mode
 HP Power Profile was set to Maximum Performance
 Memory Refresh Rate was set to 1x Refresh
 Sysinfo program /home/cpu2006/config/sysinfo.rev6874.hp
 \$Rev: 6874 \$ \$Date:: 2013-11-20 #\$ e05b96ddac6c3d74bfe176502a0a2391
 running on bl660-rwen-blade4 Sat Jan 25 11:16:18 2014

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see: <http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo

```

model name : Intel(R) Xeon(R) CPU E5-4657L v2 @ 2.40GHz
 4 "physical id"s (chips)
 96 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
  cpu cores : 12
  siblings  : 24
  physical 0: cores 0 1 2 3 4 5 8 9 10 11 12 13
  physical 1: cores 0 1 2 3 4 5 8 9 10 11 12 13
  physical 2: cores 0 1 2 3 4 5 8 9 10 11 12 13
  physical 3: cores 0 1 2 3 4 5 8 9 10 11 12 13
cache size : 30720 KB

```

From /proc/meminfo

```

MemTotal:      264505672 kB
HugePages_Total:      0
Hugepagesize:    2048 kB

```

/usr/bin/lsb_release -d

SUSE Linux Enterprise Server 11 (x86_64)

From /etc/*release* /etc/*version*

```

SuSE-release:
  SUSE Linux Enterprise Server 11 (x86_64)
  VERSION = 11
  PATCHLEVEL = 3

```

uname -a:

Linux bl660-rwen-blade4 3.0.76-0.11-default #1 SMP Fri Jun 14 08:21:43 UTC 2013 (ccab990) x86_64 x86_64 x86_64 GNU/Linux

run-level 3 Jan 24 22:16 last=S

SPEC is set to: /home/cpu2006

```

Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda2       ext3  274G   90G  183G   33% /

```

Additional information from dmidecode:

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECfp_rate2006 = 1330

ProLiant BL660c Gen8
(2.40 GHz, Intel Xeon E5-4657L v2)

SPECfp_rate_base2006 = 1290

CPU2006 license: 3
Test sponsor: Hewlett-Packard Company
Tested by: Hewlett-Packard Company

Test date: Jan-2014
Hardware Availability: Mar-2014
Software Availability: Nov-2013

Platform Notes (Continued)

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS HP I32 11/15/2013
Memory:
32x HP 712382-071 8 GB 1866 MHz

(End of data from sysinfo program)

General Notes

Environment variables set by runspec before the start of the run:
LD_LIBRARY_PATH = "/home/cpu2006/libs/32:/home/cpu2006/libs/64:/home/cpu2006/sh"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB
memory using RedHat EL 6.4

Base Compiler Invocation

C benchmarks:
icc -m64

C++ benchmarks:
icpc -m64

Fortran benchmarks:
ifort -m64

Benchmarks using both Fortran and C:
icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECfp_rate2006 = 1330

ProLiant BL660c Gen8
(2.40 GHz, Intel Xeon E5-4657L v2)

SPECfp_rate_base2006 = 1290

CPU2006 license: 3

Test date: Jan-2014

Test sponsor: Hewlett-Packard Company

Hardware Availability: Mar-2014

Tested by: Hewlett-Packard Company

Software Availability: Nov-2013

Base Portability Flags (Continued)

454.calculix: -DSPEC_CPU_LP64 -nofor_main
 459.GemsFDTD: -DSPEC_CPU_LP64
 465.tonto: -DSPEC_CPU_LP64
 470.lbm: -DSPEC_CPU_LP64
 481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
 482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:
 -xAVX -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -ansi-alias
 -opt-mem-layout-trans=3

C++ benchmarks:
 -xAVX -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -ansi-alias
 -opt-mem-layout-trans=3

Fortran benchmarks:
 -xAVX -ipo -O3 -no-prec-div -opt-prefetch

Benchmarks using both Fortran and C:
 -xAVX -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -ansi-alias
 -opt-mem-layout-trans=3

Peak Compiler Invocation

C benchmarks:
 icc -m64

C++ benchmarks (except as noted below):
 icpc -m64

450.soplex: icpc -m32

Fortran benchmarks:
 ifort -m64

Benchmarks using both Fortran and C:
 icc -m64 ifort -m64

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECfp_rate2006 = 1330

ProLiant BL660c Gen8
(2.40 GHz, Intel Xeon E5-4657L v2)

SPECfp_rate_base2006 = 1290

CPU2006 license: 3

Test date: Jan-2014

Test sponsor: Hewlett-Packard Company

Hardware Availability: Mar-2014

Tested by: Hewlett-Packard Company

Software Availability: Nov-2013

Peak Portability Flags (Continued)

```

416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

```

Peak Optimization Flags

C benchmarks:

```

433.milc: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
         -no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
         -prof-use(pass 2) -auto-ilp32

```

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

```

444.namd: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
         -no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
         -prof-use(pass 2) -fno-alias -auto-ilp32

```

447.dealII: basepeak = yes

```

450.soplex: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
         -no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
         -prof-use(pass 2) -opt-malloc-options=3

```

```

453.povray: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
         -no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
         -prof-use(pass 2) -unroll4 -ansi-alias

```

Fortran benchmarks:

410.bwaves: basepeak = yes

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECfp_rate2006 = 1330

ProLiant BL660c Gen8
(2.40 GHz, Intel Xeon E5-4657L v2)

SPECfp_rate_base2006 = 1290

CPU2006 license: 3
Test sponsor: Hewlett-Packard Company
Tested by: Hewlett-Packard Company

Test date: Jan-2014
Hardware Availability: Mar-2014
Software Availability: Nov-2013

Peak Optimization Flags (Continued)

416.gamess: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2
-inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: -xAVX -ipo -O3 -no-prec-div -opt-prefetch

459.GemsFDTD: basepeak = yes

465.tonto: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -auto
-inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
-prof-use(pass 2) -opt-prefetch -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: -xAVX -ipo -O3 -no-prec-div -auto-ilp32

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.html>
<http://www.spec.org/cpu2006/flags/HP-Platform-Flags-Intel-V1.2-revB.20131009.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.xml>
<http://www.spec.org/cpu2006/flags/HP-Platform-Flags-Intel-V1.2-revB.20131009.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Thu Jul 24 21:25:46 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 11 March 2014.