



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint®2006 = 59.7

PowerEdge R920 (Intel Xeon E7-4890 v2, 2.80 GHz)

SPECint_base2006 = 56.1

CPU2006 license: 55


Test date: Feb-2014

Test sponsor: Dell Inc.

Hardware Availability: Mar-2014

Tested by: Dell Inc.

Software Availability: Mar-2014

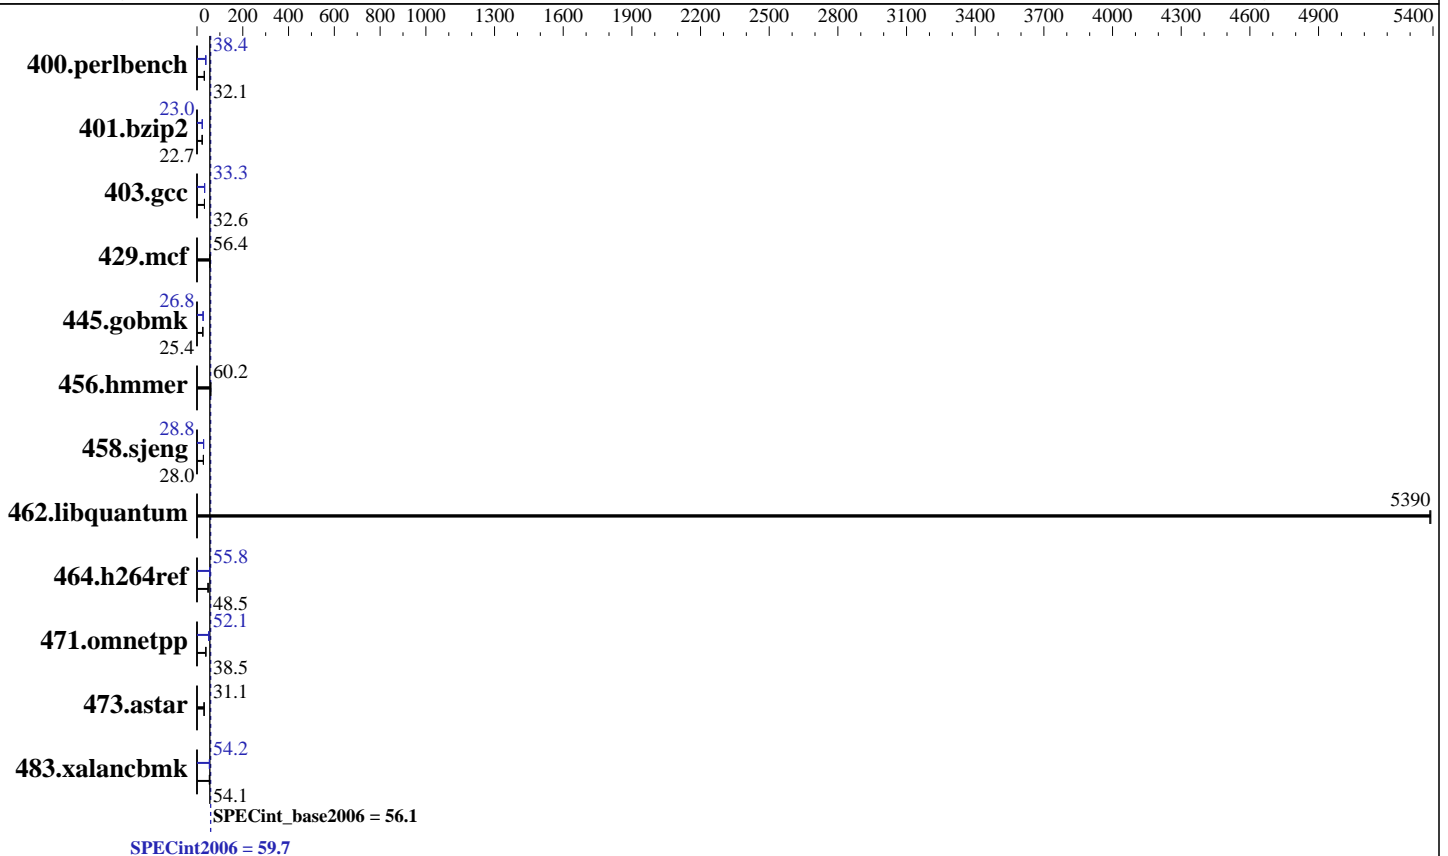

Hardware

CPU Name: Intel Xeon E7-4890 v2
 CPU Characteristics: Intel Turbo Boost Technology up to 3.40 GHz
 CPU MHz: 2800
 FPU: Integrated
 CPU(s) enabled: 60 cores, 4 chips, 15 cores/chip
 CPU(s) orderable: 2,4 chip
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core
 L3 Cache: 37.5 MB I+D on chip per chip
 Other Cache: None
 Memory: 1 TB (64 x 16 GB 2Rx4 PC3L-12800R-11, ECC)
 Disk Subsystem: 1 x 400 GB SAS6 SSD
 Other Hardware: None

Software

Operating System: SUSE Linux Enterprise Server 11 (x86_64)
 3.0.76-0.11-default
 Compiler: C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux
 Auto Parallel: Yes
 File System: ext2
 System State: Run level 3 (multi-user)
 Base Pointers: 32/64-bit
 Peak Pointers: 32/64-bit
 Other Software: Microquill SmartHeap V10.0



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint2006 = 59.7

PowerEdge R920 (Intel Xeon E7-4890 v2, 2.80 GHz)

SPECint_base2006 = 56.1

CPU2006 license: 55

Test date: Feb-2014

Test sponsor: Dell Inc.

Hardware Availability: Mar-2014

Tested by: Dell Inc.

Software Availability: Mar-2014

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	305	32.1	305	32.1	305	32.0	255	38.4	255	38.3	254	38.4
401.bzip2	425	22.7	425	22.7	425	22.7	419	23.0	418	23.1	419	23.0
403.gcc	247	32.6	247	32.6	247	32.6	242	33.3	242	33.3	242	33.3
429.mcf	162	56.4	162	56.5	162	56.2	162	56.4	162	56.5	162	56.2
445.gobmk	414	25.4	413	25.4	414	25.4	391	26.8	391	26.8	392	26.7
456.hammer	157	59.4	155	60.3	155	60.2	157	59.4	155	60.3	155	60.2
458.sjeng	432	28.0	432	28.0	432	28.0	420	28.8	421	28.8	420	28.8
462.libquantum	3.84	5390	3.85	5390	3.85	5390	3.84	5390	3.85	5390	3.85	5390
464.h264ref	457	48.5	457	48.4	456	48.5	396	55.8	396	55.8	397	55.7
471.omnetpp	162	38.5	161	38.7	163	38.4	120	52.3	120	52.1	123	51.0
473.astar	226	31.1	226	31.1	226	31.1	226	31.1	226	31.1	226	31.1
483.xalancbmk	127	54.1	128	54.0	126	54.8	127	54.1	127	54.4	127	54.2

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

BIOS settings:

Virtualization Technology disabled

Execute Disable disabled

Logical Processor disabled

System Profile set to Custom

Memory Patrol Scrub set to disabled

Sysinfo program

```
/root/Desktop/Performance/ic14.0_Oct17_2013/config/sysinfo.rev6818
$Rev: 6818 $ $Date:: 2012-07-17 #$ e86d102572650a6e4d596a3cee98f191
running on slesperf1 Fri Feb 7 20:46:07 2014
```

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:

<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name : Intel(R) Xeon(R) CPU E7-4890 v2 @ 2.80GHz
4 "physical id"s (chips)
60 "processors"
```

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint2006 = 59.7

PowerEdge R920 (Intel Xeon E7-4890 v2, 2.80 GHz)

SPECint_base2006 = 56.1

CPU2006 license: 55

Test date: Feb-2014

Test sponsor: Dell Inc.

Hardware Availability: Mar-2014

Tested by: Dell Inc.

Software Availability: Mar-2014

Platform Notes (Continued)

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

```

cpu cores : 15
siblings  : 15
physical 0: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14
physical 1: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14
physical 2: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14
physical 3: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14
cache size : 38400 KB

```

From /proc/meminfo

```

MemTotal:      1058789108 kB
HugePages_Total: 0
Hugepagesize:  2048 kB

```

/usr/bin/lbs_release -d

SUSE Linux Enterprise Server 11 (x86_64)

From /etc/*release* /etc/*version*

```

SuSE-release:
SUSE Linux Enterprise Server 11 (x86_64)
VERSION = 11
PATCHLEVEL = 3

```

uname -a:

```

Linux slesperf1 3.0.76-0.11-default #1 SMP Fri Jun 14 08:21:43 UTC 2013
(ccab990) x86_64 x86_64 x86_64 GNU/Linux

```

run-level 3 Feb 7 20:36 last=S

SPEC is set to: /root/Desktop/Performance/ic14.0_Oct17_2013

```

Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda2       ext2  365G   31G  333G   9% /

```

Additional information from dmidecode:

```

BIOS Dell Inc. 1.0.4 01/27/2014
Memory:
32x 00CE00B300CE M393B2G70BH0-YK0 16 GB 1333 MHz
10x 00CE00B300CE M393B2G70CB0-YK0 16 GB 1333 MHz
22x 00CE04B300CE M393B2G70CB0-YK0 16 GB 1333 MHz

```

(End of data from sysinfo program)

General Notes

Environment variables set by runspec before the start of the run:

KMP_AFFINITY = "granularity=fine,scatter"

LD_LIBRARY_PATH = "/root/Desktop/Performance/ic14.0_Oct17_2013/libs/32:/root/Desktop/Performance/ic14.0_Oct17_2013/libs/64:/root/Desktop/Performance/ic14.0_Oct17_2013/sh"

OMP_NUM_THREADS = "60"

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint2006 = 59.7

PowerEdge R920 (Intel Xeon E7-4890 v2, 2.80 GHz)

SPECint_base2006 = 56.1

CPU2006 license: 55

Test date: Feb-2014

Test sponsor: Dell Inc.

Hardware Availability: Mar-2014

Tested by: Dell Inc.

Software Availability: Mar-2014

General Notes (Continued)

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB memory using RedHat EL 6.4
Transparent Huge Pages enabled with:
echo always > /sys/kernel/mm/transparent_hugepage/enabled
runspec command invoked through numactl i.e.:
numactl --interleave=all runspec <etc>

Base Compiler Invocation

C benchmarks:
icc -m64

C++ benchmarks:
icpc -m64

Base Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
403.gcc: -DSPEC_CPU_LP64
429.mcf: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
471.omnetpp: -DSPEC_CPU_LP64
473.astar: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:
-xAVX -ipo -O3 -no-prec-div -parallel -opt-prefetch -auto-p32

C++ benchmarks:
-xAVX -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -Wl,-z,muldefs
-L/sh -lsmartheap64

Base Other Flags

C benchmarks:

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint2006 = 59.7

PowerEdge R920 (Intel Xeon E7-4890 v2, 2.80 GHz)

SPECint_base2006 = 56.1

CPU2006 license: 55

Test date: Feb-2014

Test sponsor: Dell Inc.

Hardware Availability: Mar-2014

Tested by: Dell Inc.

Software Availability: Mar-2014

Base Other Flags (Continued)

403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m64

400.perlbench: icc -m32

445.gobmk: icc -m32

464.h264ref: icc -m32

C++ benchmarks (except as noted below):

icpc -m32

473.astar: icpc -m64

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32

401.bzip2: -DSPEC_CPU_LP64

403.gcc: -DSPEC_CPU_LP64

429.mcf: -DSPEC_CPU_LP64

456.hmmer: -DSPEC_CPU_LP64

458.sjeng: -DSPEC_CPU_LP64

462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX

473.astar: -DSPEC_CPU_LP64

483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -opt-prefetch
-ansi-alias

401.bzip2: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div -prof-use(pass 2) -auto-ilp32 -opt-prefetch
-ansi-alias

403.gcc: -xAVX -ipo -O3 -no-prec-div -inline-calloc
-opt-malloc-options=3 -auto-ilp32

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint2006 = 59.7

PowerEdge R920 (Intel Xeon E7-4890 v2, 2.80 GHz)

SPECint_base2006 = 56.1

CPU2006 license: 55

Test date: Feb-2014

Test sponsor: Dell Inc.

Hardware Availability: Mar-2014

Tested by: Dell Inc.

Software Availability: Mar-2014

Peak Optimization Flags (Continued)

429.mcf: basepeak = yes

445.gobmk: -xAVX(pass 2) -prof-gen(pass 1) -prof-use(pass 2)
-ansi-alias

456.hmmmer: basepeak = yes

458.sjeng: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4

462.libquantum: basepeak = yes

464.h264ref: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2
-ansi-alias

C++ benchmarks:

471.omnetpp: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2)
-opt-ra-region-strategy=block -ansi-alias
-Wl,-z,muldefs -L/sh -lsmartheap

473.astar: basepeak = yes

483.xalancbmk: -xAVX -ipo -O3 -no-prec-div -opt-prefetch -ansi-alias
-Wl,-z,muldefs -L/sh -lsmartheap

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.html>

<http://www.spec.org/cpu2006/flags/Dell-Platform-Settings-V1.2-revC.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.xml>

<http://www.spec.org/cpu2006/flags/Dell-Platform-Settings-V1.2-revC.xml>



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint2006 = 59.7

PowerEdge R920 (Intel Xeon E7-4890 v2, 2.80 GHz)

SPECint_base2006 = 56.1

CPU2006 license: 55

Test date: Feb-2014

Test sponsor: Dell Inc.

Hardware Availability: Mar-2014

Tested by: Dell Inc.

Software Availability: Mar-2014

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Thu Jul 24 22:03:04 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 26 March 2014.