



# SPEC<sup>®</sup> CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp<sup>®</sup>2006 = 95.6

PowerEdge R920 (Intel Xeon E7-4880 v2, 2.50 GHz)

SPECfp\_base2006 = 90.9

CPU2006 license: 55


Test date: Mar-2014

Test sponsor: Dell Inc.

Hardware Availability: Mar-2014

Tested by: Dell Inc.

Software Availability: Mar-2014

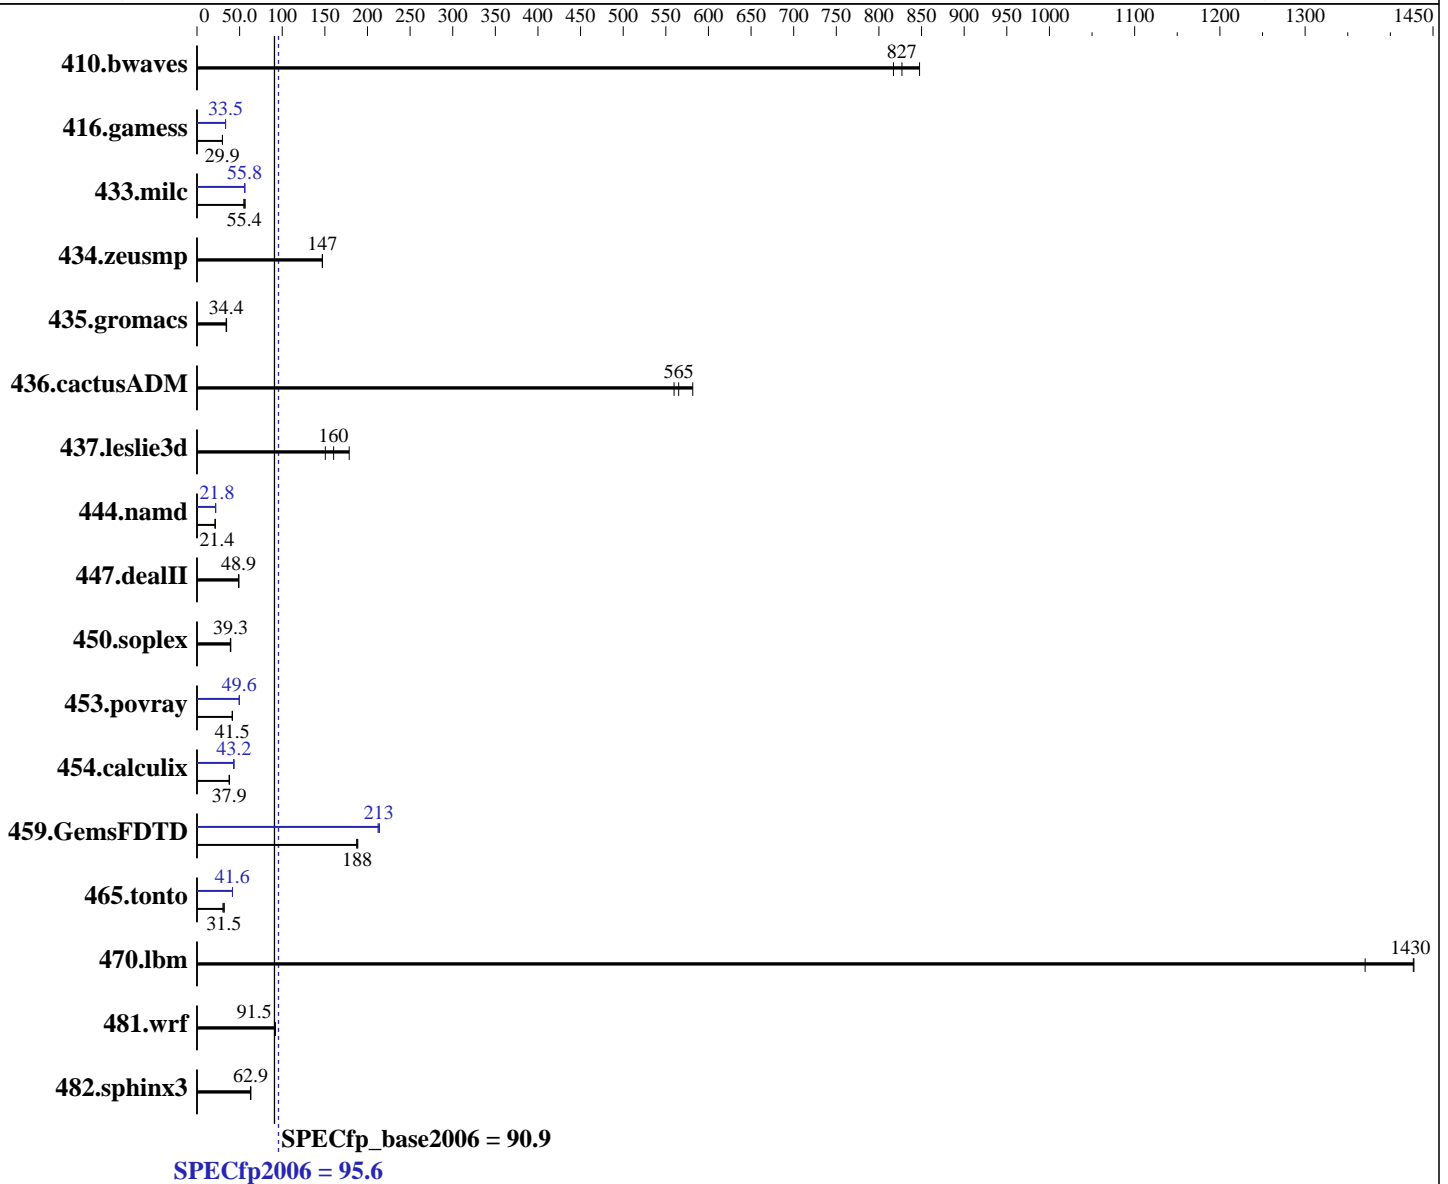

### Hardware

CPU Name: Intel Xeon E7-4880 v2  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.10 GHz  
 CPU MHz: 2500  
 FPU: Integrated  
 CPU(s) enabled: 60 cores, 4 chips, 15 cores/chip, 2 threads/core  
 CPU(s) orderable: 2,4 chip  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

### Software

Operating System: SUSE Linux Enterprise Server 11 (x86\_64)  
 3.0.76-0.11-default  
 Compiler: C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux;  
 Fortran: Version 14.0.0.080 of Intel Fortran Studio XE for Linux  
 Auto Parallel: Yes  
 File System: ext2  
 System State: Run level 3 (multi-user)

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp2006 = 95.6

PowerEdge R920 (Intel Xeon E7-4880 v2, 2.50 GHz)

SPECfp\_base2006 = 90.9

CPU2006 license: 55

Test date: Mar-2014

Test sponsor: Dell Inc.

Hardware Availability: Mar-2014

Tested by: Dell Inc.

Software Availability: Mar-2014

L3 Cache: 37.5 MB I+D on chip per chip  
Other Cache: None  
Memory: 1 TB (64 x 16 GB 2Rx4 PC3L-12800R-11, ECC)  
Disk Subsystem: 1 x 400 GB SAS6 SSD  
Other Hardware: None

Base Pointers: 64-bit  
Peak Pointers: 32/64-bit  
Other Software: None

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	16.0	848	16.6	817	<b>16.4</b>	<b>827</b>	16.0	848	16.6	817	<b>16.4</b>	<b>827</b>
416.gamess	<b>656</b>	<b>29.9</b>	656	29.8	655	29.9	585	33.5	584	33.5	<b>585</b>	<b>33.5</b>
433.milc	162	56.5	<b>166</b>	<b>55.4</b>	167	55.0	<b>165</b>	<b>55.8</b>	163	56.3	165	55.7
434.zeusmp	<b>61.9</b>	<b>147</b>	61.9	147	61.9	147	<b>61.9</b>	<b>147</b>	61.9	147	61.9	147
435.gromacs	208	34.3	206	34.7	<b>208</b>	<b>34.4</b>	208	34.3	206	34.7	<b>208</b>	<b>34.4</b>
436.cactusADM	20.5	582	21.4	560	<b>21.1</b>	<b>565</b>	20.5	582	21.4	560	<b>21.1</b>	<b>565</b>
437.leslie3d	52.6	179	<b>58.6</b>	<b>160</b>	62.4	151	52.6	179	<b>58.6</b>	<b>160</b>	62.4	151
444.namd	375	21.4	<b>375</b>	<b>21.4</b>	375	21.4	<b>367</b>	<b>21.8</b>	367	21.9	367	21.8
447.dealII	233	49.1	235	48.7	<b>234</b>	<b>48.9</b>	233	49.1	235	48.7	<b>234</b>	<b>48.9</b>
450.soplex	213	39.1	210	39.7	<b>212</b>	<b>39.3</b>	213	39.1	210	39.7	<b>212</b>	<b>39.3</b>
453.povray	129	41.3	<b>128</b>	<b>41.5</b>	128	41.6	<b>107</b>	<b>49.6</b>	107	49.7	107	49.6
454.calculix	218	37.8	<b>218</b>	<b>37.9</b>	216	38.2	<b>191</b>	<b>43.2</b>	191	43.1	191	43.2
459.GemsFDTD	<b>56.4</b>	<b>188</b>	56.6	187	56.2	189	49.5	214	<b>49.7</b>	<b>213</b>	49.9	212
465.tonto	323	30.4	<b>312</b>	<b>31.5</b>	308	31.9	237	41.6	<b>236</b>	<b>41.6</b>	236	41.7
470.lbm	<b>9.63</b>	<b>1430</b>	9.62	1430	10.0	1370	<b>9.63</b>	<b>1430</b>	9.62	1430	10.0	1370
481.wrf	123	90.9	<b>122</b>	<b>91.5</b>	121	92.1	123	90.9	<b>122</b>	<b>91.5</b>	121	92.1
482.sphinx3	311	62.7	<b>310</b>	<b>62.9</b>	309	63.1	311	62.7	<b>310</b>	<b>62.9</b>	309	63.1

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

BIOS settings:  
Virtualization Technology disabled  
Execute Disable disabled  
System Profile set to Custom  
ClE enabled  
C States enabled  
Memory Patrol Scrub set to disabled  
Sysinfo program  
/root/Desktop/Performance/ic14.0\_Oct17\_2013/config/sysinfo.rev6818  
\$Rev: 6818 \$ \$Date:: 2012-07-17 # \$ e86d102572650a6e4d596a3cee98f191

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp2006 = 95.6

PowerEdge R920 (Intel Xeon E7-4880 v2, 2.50 GHz)

SPECfp\_base2006 = 90.9

CPU2006 license: 55

Test date: Mar-2014

Test sponsor: Dell Inc.

Hardware Availability: Mar-2014

Tested by: Dell Inc.

Software Availability: Mar-2014

## Platform Notes (Continued)

running on slesperf1 Mon Mar 3 01:00:43 2014

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see: <http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo

```

model name : Intel(R) Xeon(R) CPU E7-4880 v2 @ 2.50GHz
 4 "physical id"s (chips)
 120 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
  cpu cores : 15
  siblings  : 30
 physical 0: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14
 physical 1: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14
 physical 2: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14
 physical 3: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14
 cache size : 38400 KB

```

From /proc/meminfo

```

MemTotal:      1058789108 kB
HugePages_Total:    0
Hugepagesize:     2048 kB

```

/usr/bin/lsb\_release -d

SUSE Linux Enterprise Server 11 (x86\_64)

From /etc/\*release\* /etc/\*version\*

```

SuSE-release:
 SUSE Linux Enterprise Server 11 (x86_64)
 VERSION = 11
 PATCHLEVEL = 3

```

uname -a:

Linux slesperf1 3.0.76-0.11-default #1 SMP Fri Jun 14 08:21:43 UTC 2013 (ccab990) x86\_64 x86\_64 x86\_64 GNU/Linux

run-level 3 Mar 2 22:32 last=S

SPEC is set to: /root/Desktop/Performance/ic14.0\_Oct17\_2013

```

Filesystem      Type  Size  Used Avail Use% Mounted on
 /dev/sda2      ext2  365G   31G  333G   9% /

```

Additional information from dmidecode:

BIOS Dell Inc. 1.0.4 01/27/2014

Memory:

```

32x 00CE00B300CE M393B2G70BH0-YK0 16 GB 1333 MHz
10x 00CE00B300CE M393B2G70CB0-YK0 16 GB 1333 MHz
22x 00CE04B300CE M393B2G70CB0-YK0 16 GB 1333 MHz

```

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp2006 = 95.6

PowerEdge R920 (Intel Xeon E7-4880 v2, 2.50 GHz)

SPECfp\_base2006 = 90.9

CPU2006 license: 55

Test date: Mar-2014

Test sponsor: Dell Inc.

Hardware Availability: Mar-2014

Tested by: Dell Inc.

Software Availability: Mar-2014

## Platform Notes (Continued)

(End of data from sysinfo program)

## General Notes

Environment variables set by runspec before the start of the run:

KMP\_AFFINITY = "granularity=fine,compact,1,0"

LD\_LIBRARY\_PATH = "/root/Desktop/Performance/icl4.0\_Oct17\_2013/libs/32:/root/Desktop/Performance/icl4.0\_Oct17\_2013/libs/64:/root/Desktop/Performance/icl4.0\_Oct17\_2013/sh"

OMP\_NUM\_THREADS = "60"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB memory using RedHat EL 6.4

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/transparent\_hugepage/enabled

runspec command invoked through numactl i.e.:

numactl --interleave=all runspec <etc>

## Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
 416.gamess: -DSPEC\_CPU\_LP64  
 433.milc: -DSPEC\_CPU\_LP64  
 434.zeusmp: -DSPEC\_CPU\_LP64  
 435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
 436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
 437.leslie3d: -DSPEC\_CPU\_LP64  
 444.namd: -DSPEC\_CPU\_LP64  
 447.dealII: -DSPEC\_CPU\_LP64  
 450.soplex: -DSPEC\_CPU\_LP64  
 453.povray: -DSPEC\_CPU\_LP64  
 454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
 459.GemsFDTD: -DSPEC\_CPU\_LP64  
 465.tonto: -DSPEC\_CPU\_LP64

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp2006 = 95.6

PowerEdge R920 (Intel Xeon E7-4880 v2, 2.50 GHz)

SPECfp\_base2006 = 90.9

CPU2006 license: 55

Test date: Mar-2014

Test sponsor: Dell Inc.

Hardware Availability: Mar-2014

Tested by: Dell Inc.

Software Availability: Mar-2014

## Base Portability Flags (Continued)

470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
482.sphinx3: -DSPEC\_CPU\_LP64

## Base Optimization Flags

C benchmarks:  
-xAVX -ipo -O3 -no-prec-div -parallel -opt-prefetch -ansi-alias  
C++ benchmarks:  
-xAVX -ipo -O3 -no-prec-div -opt-prefetch -ansi-alias  
Fortran benchmarks:  
-xAVX -ipo -O3 -no-prec-div -parallel -opt-prefetch  
Benchmarks using both Fortran and C:  
-xAVX -ipo -O3 -no-prec-div -parallel -opt-prefetch -ansi-alias

## Peak Compiler Invocation

C benchmarks:  
icc -m64  
C++ benchmarks:  
icpc -m64  
Fortran benchmarks:  
ifort -m64  
Benchmarks using both Fortran and C:  
icc -m64 ifort -m64

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:  
433.milc: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -auto-ilp32  
-ansi-alias

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp2006 = 95.6

PowerEdge R920 (Intel Xeon E7-4880 v2, 2.50 GHz)

SPECfp\_base2006 = 90.9

CPU2006 license: 55

Test date: Mar-2014

Test sponsor: Dell Inc.

Hardware Availability: Mar-2014

Tested by: Dell Inc.

Software Availability: Mar-2014

## Peak Optimization Flags (Continued)

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

### C++ benchmarks:

444.namd: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -fno-alias  
-auto-ilp32

447.dealIII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -ansi-alias

### Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2  
-inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2  
-inline-level=0 -opt-prefetch -parallel

465.tonto: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -inline-calloc  
-opt-malloc-options=3 -auto -unroll4

### Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

454.calculix: -xAVX -ipo -O3 -no-prec-div -auto-ilp32 -ansi-alias

481.wrf: basepeak = yes



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp2006 = 95.6

PowerEdge R920 (Intel Xeon E7-4880 v2, 2.50 GHz)

SPECfp\_base2006 = 90.9

CPU2006 license: 55

Test date: Mar-2014

Test sponsor: Dell Inc.

Hardware Availability: Mar-2014

Tested by: Dell Inc.

Software Availability: Mar-2014

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.html>

<http://www.spec.org/cpu2006/flags/Dell-Platform-Settings-V1.2-revC.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.xml>

<http://www.spec.org/cpu2006/flags/Dell-Platform-Settings-V1.2-revC.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Thu Jul 24 20:42:24 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 25 March 2014.