



# SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## IBM Corporation

IBM System x3630 M4  
(Intel Xeon E5-2430 v2, 2.50 GHz)

**SPECfp®2006 = 78.4**

**SPECfp\_base2006 = 75.7**

CPU2006 license: 11


Test sponsor: IBM Corporation

Tested by: IBM Corporation

**Test date:** Mar-2014

**Hardware Availability:** Mar-2014

**Software Availability:** Nov-2013

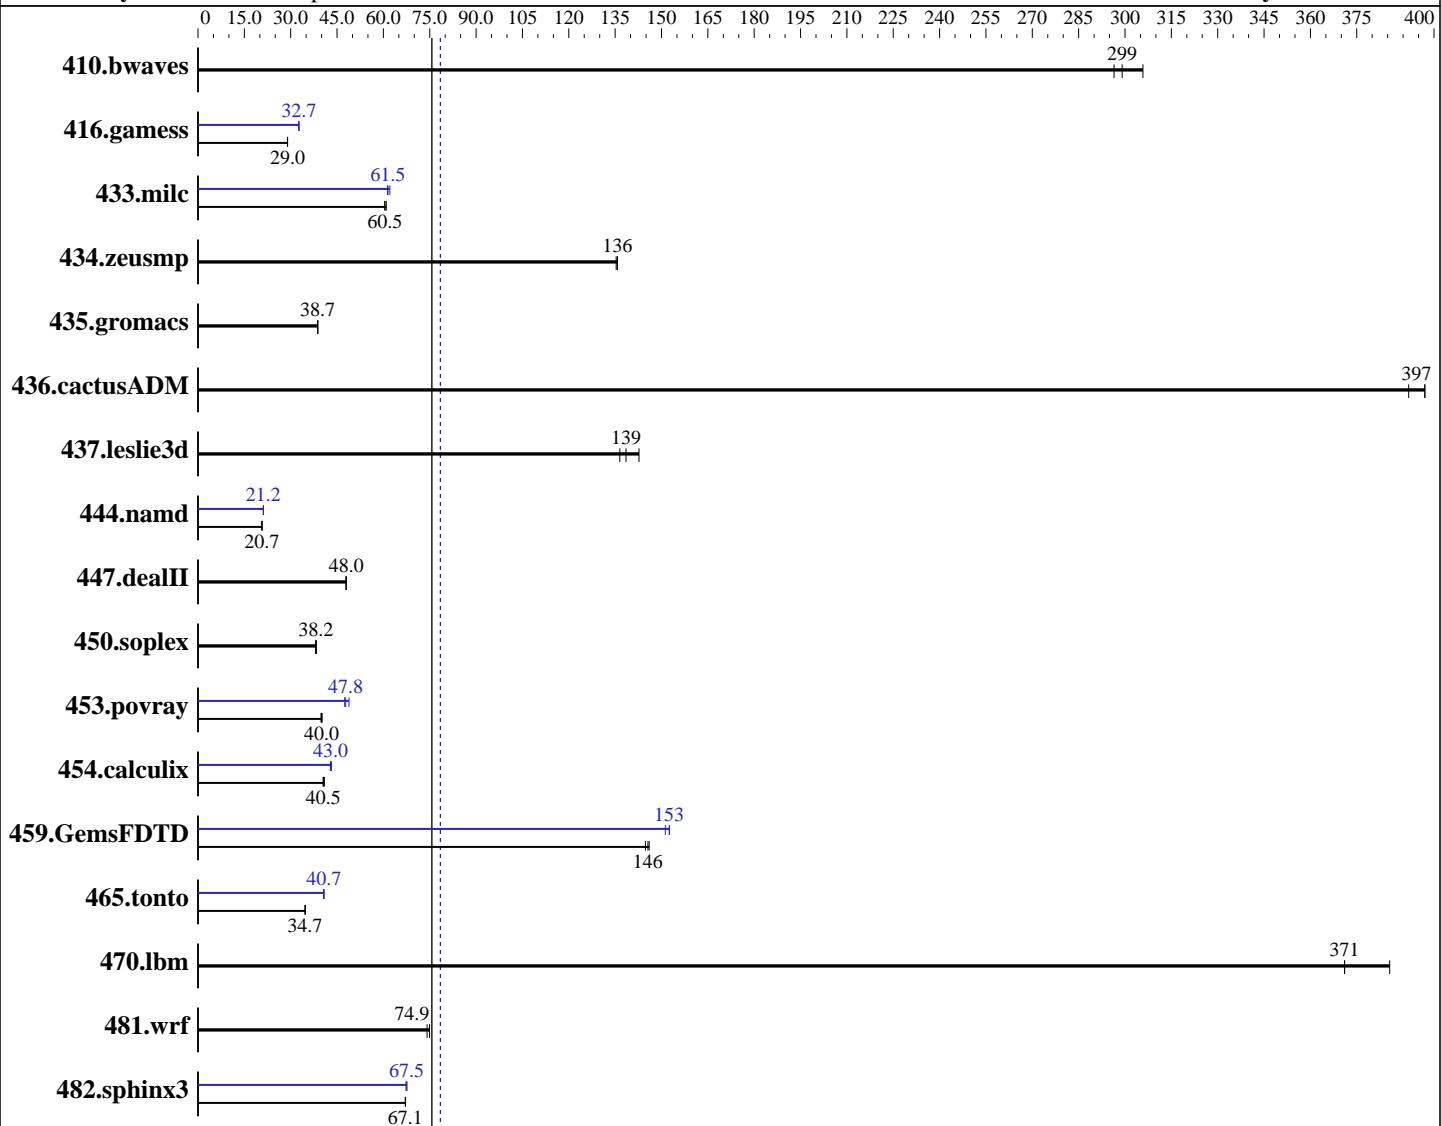

### Hardware

CPU Name: Intel Xeon E5-2430 v2  
CPU Characteristics: Intel Turbo Boost Technology up to 3.00 GHz  
CPU MHz: 2500  
FPU: Integrated  
CPU(s) enabled: 12 cores, 2 chips, 6 cores/chip, 2 threads/core  
CPU(s) orderable: 1,2 chips  
Primary Cache: 32 KB I + 32 KB D on chip per core  
Secondary Cache: 256 KB I+D on chip per core

### Software

Operating System: Red Hat Enterprise Linux Server release 6.5 (Santiago)  
Compiler: 2.6.32-431.el6.x86\_64  
C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux;  
Fortran: Version 14.0.0.080 of Intel Fortran Studio XE for Linux  
Auto Parallel: Yes  
File System: ext4

*Continued on next page*

*Continued on next page*



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## IBM Corporation

IBM System x3630 M4  
(Intel Xeon E5-2430 v2, 2.50 GHz)

**SPECfp2006 = 78.4**

**SPECfp\_base2006 = 75.7**

**CPU2006 license:** 11

**Test sponsor:** IBM Corporation

**Tested by:** IBM Corporation

**Test date:** Mar-2014

**Hardware Availability:** Mar-2014

**Software Availability:** Nov-2013

L3 Cache: 15 MB I+D on chip per chip  
Other Cache: None  
Memory: 192 GB (12 x 16 GB 2Rx4 PC3-12800R-11, ECC)  
Disk Subsystem: 1 x 2 TB SATA, 7200 RPM  
Other Hardware: None

System State: Run level 3 (multi-user)  
Base Pointers: 64-bit  
Peak Pointers: 32/64-bit  
Other Software: None

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio										
410.bwaves	45.8	296	<b>45.4</b>	<b>299</b>	44.4	306	<b>45.8</b>	<b>296</b>	<b>45.4</b>	<b>299</b>	44.4	306
416.gamess	<b>676</b>	<b>29.0</b>	675	29.0	676	29.0	<b>601</b>	<b>32.6</b>	<b>599</b>	<b>32.7</b>	<b>599</b>	<b>32.7</b>
433.milc	152	60.5	<b>152</b>	<b>60.5</b>	151	60.9	<b>150</b>	<b>61.3</b>	148	62.1	<b>149</b>	<b>61.5</b>
434.zeusmp	<b>67.0</b>	<b>136</b>	67.0	136	67.2	135	<b>67.0</b>	<b>136</b>	67.0	136	67.2	135
435.gromacs	185	38.7	<b>184</b>	<b>38.7</b>	184	38.8	<b>185</b>	<b>38.7</b>	<b>184</b>	<b>38.7</b>	184	38.8
436.cactusADM	30.1	397	30.5	392	<b>30.1</b>	<b>397</b>	30.1	397	30.5	392	<b>30.1</b>	<b>397</b>
437.leslie3d	68.9	137	65.9	143	<b>67.9</b>	<b>139</b>	68.9	137	65.9	143	<b>67.9</b>	<b>139</b>
444.namd	387	20.7	388	20.6	<b>388</b>	<b>20.7</b>	380	21.1	<b>379</b>	<b>21.2</b>	379	21.2
447.dealII	<b>239</b>	<b>48.0</b>	239	47.9	238	48.0	<b>239</b>	<b>48.0</b>	239	47.9	238	48.0
450.soplex	218	38.3	<b>218</b>	<b>38.2</b>	219	38.1	<b>218</b>	<b>38.3</b>	<b>218</b>	<b>38.2</b>	219	38.1
453.povray	132	40.2	<b>133</b>	<b>40.0</b>	134	39.8	<b>112</b>	<b>47.5</b>	109	48.9	<b>111</b>	<b>47.8</b>
454.calculix	202	40.9	204	40.5	<b>204</b>	<b>40.5</b>	193	42.8	191	43.2	<b>192</b>	<b>43.0</b>
459.GemsFDTD	72.7	146	<b>72.9</b>	<b>146</b>	73.3	145	<b>70.2</b>	<b>151</b>	69.6	153	<b>69.6</b>	<b>153</b>
465.tonto	284	34.7	<b>284</b>	<b>34.7</b>	283	34.7	<b>242</b>	<b>40.7</b>	241	40.8	242	40.6
470.lbm	35.6	386	<b>37.0</b>	<b>371</b>	37.0	371	<b>35.6</b>	<b>386</b>	<b>37.0</b>	<b>371</b>	37.0	371
481.wrf	151	74.1	149	74.9	<b>149</b>	<b>74.9</b>	151	74.1	149	74.9	<b>149</b>	<b>74.9</b>
482.sphinx3	<b>290</b>	<b>67.1</b>	290	67.2	291	67.1	<b>288</b>	<b>67.6</b>	<b>290</b>	<b>67.3</b>	<b>289</b>	<b>67.5</b>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"  
Zone reclaim mode enabled with:  
echo 1 > /proc/sys/vm/zone\_reclaim\_mode

## Platform Notes

BIOS setting:  
Operating Mode set to Maximum Performance



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## IBM Corporation

IBM System x3630 M4  
(Intel Xeon E5-2430 v2, 2.50 GHz)

**SPECfp2006 = 78.4**

**SPECfp\_base2006 = 75.7**

**CPU2006 license:** 11

**Test sponsor:** IBM Corporation

**Tested by:** IBM Corporation

**Test date:** Mar-2014

**Hardware Availability:** Mar-2014

**Software Availability:** Nov-2013

## General Notes

Environment variables set by runspec before the start of the run:

KMP\_AFFINITY = "granularity=fine,compact,1,0"

LD\_LIBRARY\_PATH = "/home/SPECcpu-new/libs/32:/home/SPECcpu-new/libs/64:/home/SPECcpu-new/sh"

OMP\_NUM\_THREADS = "12"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB memory using RedHat EL 6.4

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/redhat\_transparent\_hugepage/enabled

runspec command invoked through numactl i.e.:

numactl --interleave=all runspec <etc>

## Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.dealII: -DSPEC\_CPU\_LP64  
450.soplex: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
482.sphinx3: -DSPEC\_CPU\_LP64



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## IBM Corporation

IBM System x3630 M4  
(Intel Xeon E5-2430 v2, 2.50 GHz)

**SPECfp2006 = 78.4**

**SPECfp\_base2006 = 75.7**

CPU2006 license: 11

Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: Mar-2014

Hardware Availability: Mar-2014

Software Availability: Nov-2013

## Base Optimization Flags

C benchmarks:

-xAVX -ipo -O3 -no-prec-div -parallel -opt-prefetch -ansi-alias

C++ benchmarks:

-xAVX -ipo -O3 -no-prec-div -opt-prefetch -ansi-alias

Fortran benchmarks:

-xAVX -ipo -O3 -no-prec-div -parallel -opt-prefetch

Benchmarks using both Fortran and C:

-xAVX -ipo -O3 -no-prec-div -parallel -opt-prefetch -ansi-alias

## Peak Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

433.milc: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -auto-ilp32  
-ansi-alias

470.lbm: basepeak = yes

482.sphinx3: -xAVX -ipo -O3 -no-prec-div -unroll12 -ansi-alias  
-parallel

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## IBM Corporation

IBM System x3630 M4  
(Intel Xeon E5-2430 v2, 2.50 GHz)

**SPECfp2006 = 78.4**

**SPECfp\_base2006 = 75.7**

**CPU2006 license:** 11

**Test sponsor:** IBM Corporation

**Tested by:** IBM Corporation

**Test date:** Mar-2014

**Hardware Availability:** Mar-2014

**Software Availability:** Nov-2013

## Peak Optimization Flags (Continued)

C++ benchmarks:

```
444.namd: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
           -no-prec-div(pass 2) -prof-use(pass 2) -fno-alias
           -auto-ilp32
```

```
447.dealII: basepeak = yes
```

```
450.soplex: basepeak = yes
```

```
453.povray: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
            -no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -ansi-alias
```

Fortran benchmarks:

```
410.bwaves: basepeak = yes
```

```
416.gamess: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
             -no-prec-div(pass 2) -prof-use(pass 2) -unroll2
             -inline-level=0 -scalar-rep-
```

```
434.zeusmp: basepeak = yes
```

```
437.leslie3d: basepeak = yes
```

```
459.GemsFDTD: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
                -no-prec-div(pass 2) -prof-use(pass 2) -unroll2
                -inline-level=0 -opt-prefetch -parallel
```

```
465.tonto: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
            -no-prec-div(pass 2) -prof-use(pass 2) -inline-calloc
            -opt-malloc-options=3 -auto -unroll4
```

Benchmarks using both Fortran and C:

```
435.gromacs: basepeak = yes
```

```
436.cactusADM: basepeak = yes
```

```
454.calculix: -xAVX -ipo -O3 -no-prec-div -auto-ilp32 -ansi-alias
```

```
481.wrf: basepeak = yes
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.html>  
<http://www.spec.org/cpu2006/flags/IBM-Platform-Flags-V1.2-IVB-A.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.xml>  
<http://www.spec.org/cpu2006/flags/IBM-Platform-Flags-V1.2-IVB-A.xml>



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## IBM Corporation

IBM System x3630 M4  
(Intel Xeon E5-2430 v2, 2.50 GHz)

**SPECfp2006 = 78.4**

**SPECfp\_base2006 = 75.7**

**CPU2006 license:** 11

**Test date:** Mar-2014

**Test sponsor:** IBM Corporation

**Hardware Availability:** Mar-2014

**Tested by:** IBM Corporation

**Software Availability:** Nov-2013

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.

Report generated on Thu Jul 24 22:58:56 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 16 April 2014.