



SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS B260 M4 (Intel Xeon E7-8893 v2, 3.40 GHz)

SPECfp®2006 = 85.9

SPECfp_base2006 = 80.8

CPU2006 license: 9019


Test sponsor: Cisco Systems

Tested by: Cisco Systems

Test date: May-2014

Hardware Availability: May-2014

Software Availability: Sep-2013

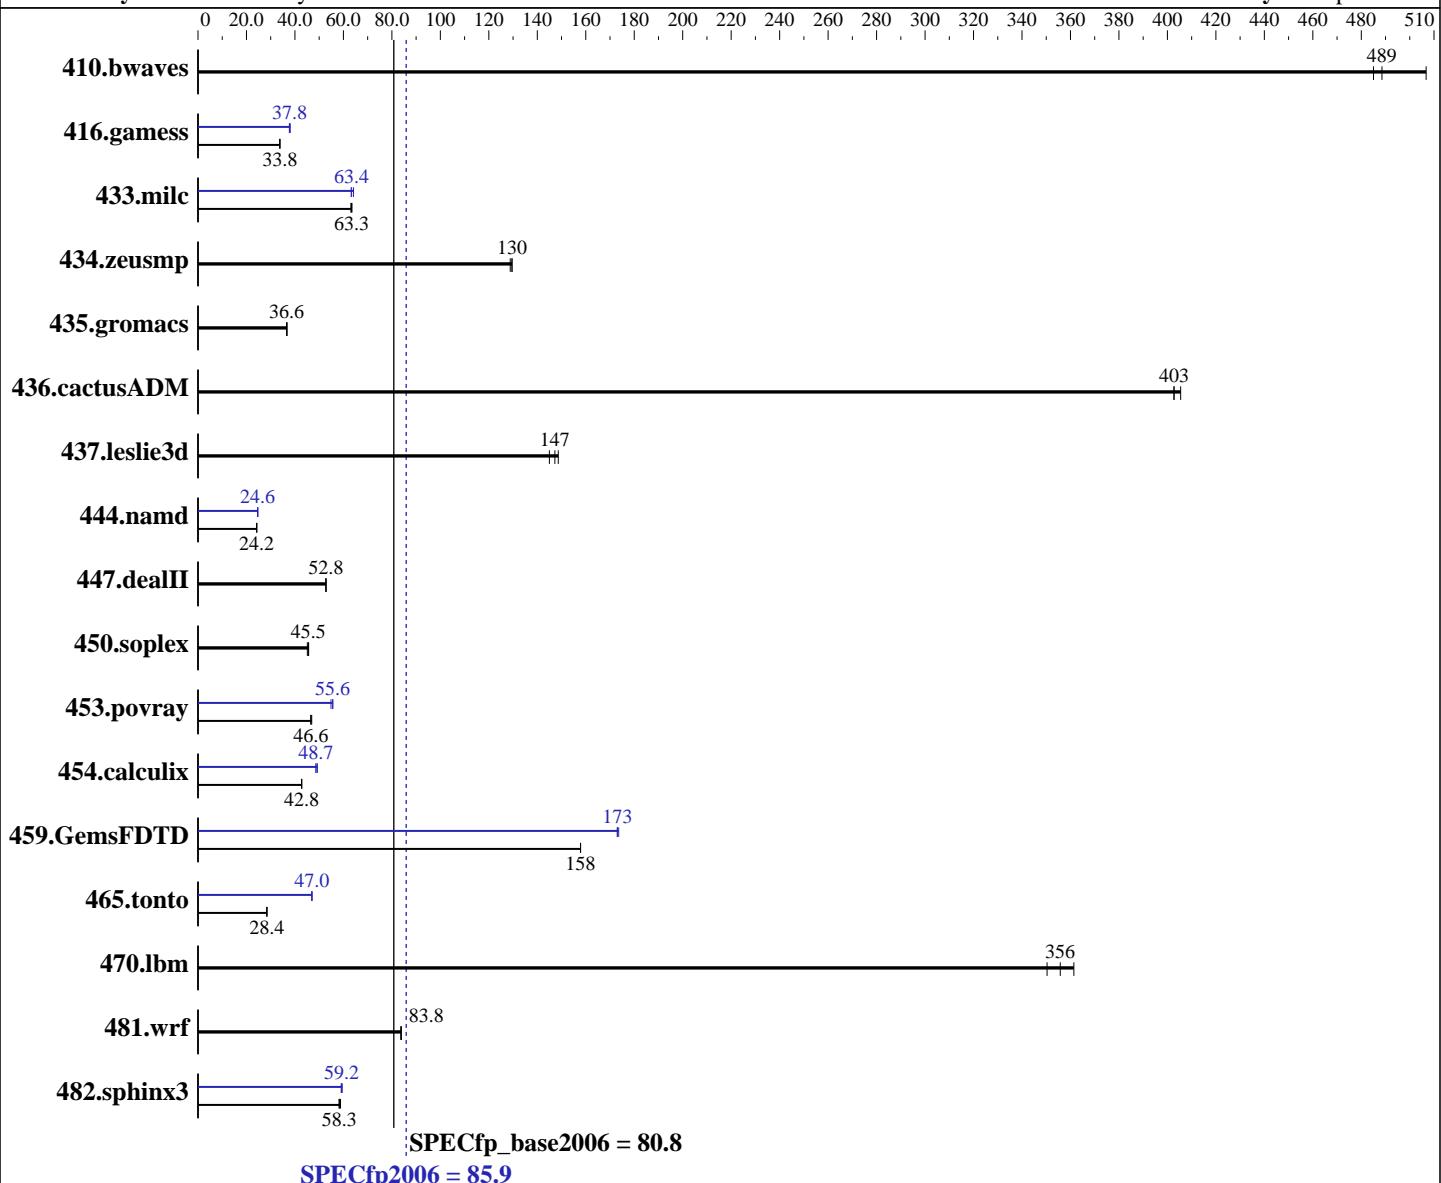

Hardware

CPU Name: Intel Xeon E7-8893 v2
 CPU Characteristics: Intel Turbo Boost Technology up to 3.70 GHz
 CPU MHz: 3400
 FPU: Integrated
 CPU(s) enabled: 12 cores, 2 chips, 6 cores/chip, 2 threads/core
 CPU(s) orderable: 1,2 chip
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

Software

Operating System: Red Hat Enterprise Linux Server release 6.4 (Santiago)
 Compiler: 2.6.32-358.el6.x86_64
 Auto Parallel: C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux;
 File System: Fortran: Version 14.0.0.080 of Intel Fortran Studio XE for Linux
 Software: ext4

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS B260 M4 (Intel Xeon E7-8893 v2, 3.40 GHz)

SPECfp2006 = 85.9

SPECfp_base2006 = 80.8

CPU2006 license: 9019

Test date: May-2014

Test sponsor: Cisco Systems

Hardware Availability: May-2014

Tested by: Cisco Systems

Software Availability: Sep-2013

L3 Cache: 37.5 MB I+D on chip per chip
 Other Cache: None
 Memory: 256 GB (32 x 8 GB 2Rx4 PC3L-12800R-11, ECC, running at 1333 MHz and CL11)
 Disk Subsystem: 1 X 300 GB 15000 RPM SAS
 Other Hardware: None

System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 32/64-bit
 Other Software: None

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio										
410.bwaves	28.0	485	26.8	507	<u>27.8</u>	<u>489</u>	28.0	485	26.8	507	<u>27.8</u>	<u>489</u>
416.gamess	579	33.8	<u>580</u>	<u>33.8</u>	580	33.7	<u>514</u>	<u>38.1</u>	<u>519</u>	<u>37.7</u>	<u>518</u>	<u>37.8</u>
433.milc	144	63.5	146	63.1	<u>145</u>	<u>63.3</u>	143	64.2	<u>145</u>	<u>63.4</u>	145	63.2
434.zeusmp	<u>70.2</u>	<u>130</u>	70.6	129	70.2	130	<u>70.2</u>	<u>130</u>	70.6	129	<u>70.2</u>	130
435.gromacs	194	36.7	195	36.6	<u>195</u>	<u>36.6</u>	194	36.7	195	36.6	<u>195</u>	<u>36.6</u>
436.cactusADM	29.7	403	<u>29.7</u>	<u>403</u>	29.5	405	29.7	403	<u>29.7</u>	<u>403</u>	29.5	405
437.leslie3d	63.2	149	64.8	145	<u>63.8</u>	<u>147</u>	63.2	149	64.8	145	<u>63.8</u>	<u>147</u>
444.namd	331	24.2	331	24.2	<u>331</u>	<u>24.2</u>	325	24.7	326	24.6	<u>326</u>	<u>24.6</u>
447.dealII	<u>217</u>	<u>52.8</u>	217	52.8	217	52.8	<u>217</u>	<u>52.8</u>	217	52.8	217	52.8
450.soplex	183	45.7	185	45.1	<u>183</u>	<u>45.5</u>	183	45.7	185	45.1	<u>183</u>	<u>45.5</u>
453.povray	113	46.9	<u>114</u>	<u>46.6</u>	114	46.5	<u>95.7</u>	<u>55.6</u>	96.9	54.9	95.6	55.6
454.calculix	<u>193</u>	<u>42.8</u>	193	42.7	193	42.8	<u>169</u>	<u>48.7</u>	169	48.7	167	49.3
459.GemsFDTD	67.2	158	67.2	158	<u>67.2</u>	<u>158</u>	61.1	174	<u>61.3</u>	<u>173</u>	61.3	173
465.tonto	<u>346</u>	<u>28.4</u>	346	28.4	347	28.4	<u>209</u>	<u>47.0</u>	210	47.0	209	47.1
470.lbm	39.2	350	<u>38.6</u>	<u>356</u>	38.0	361	<u>39.2</u>	<u>350</u>	<u>38.6</u>	<u>356</u>	38.0	361
481.wrf	<u>133</u>	<u>83.8</u>	133	83.7	133	83.8	<u>133</u>	<u>83.8</u>	133	83.7	133	83.8
482.sphinx3	<u>334</u>	<u>58.3</u>	335	58.2	331	58.8	<u>329</u>	<u>59.2</u>	<u>330</u>	<u>59.1</u>	327	59.5

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

Intel HT Technology = Enabled

CPU performance set to HPC

Power Technology set to Custom

CPU Power State C6 set to Disabled

CPU Power State C1 Enhanced set to Disabled

Memory RAS configuration set to Maximum Performance

DRAM Clock Throttling Set to Performance

Sysinfo program /opt/cpu2006-1.4/config/sysinfo.rev6818

\$Rev: 6818 \$ \$Date::: 2012-07-17 #\$ e86d102572650a6e4d596a3cee98f191

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS B260 M4 (Intel Xeon E7-8893 v2, 3.40 GHz)

SPECfp2006 = 85.9

SPECfp_base2006 = 80.8

CPU2006 license: 9019

Test date: May-2014

Test sponsor: Cisco Systems

Hardware Availability: May-2014

Tested by: Cisco Systems

Software Availability: Sep-2013

Platform Notes (Continued)

running on speccompcpu Mon May 5 05:14:57 2014

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:

<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
    model name : Intel(R) Xeon(R) CPU E7-8893 v2 @ 3.40GHz
        2 "physical id"s (chips)
        24 "processors"
    cores, siblings (Caution: counting these is hw and system dependent. The
    following excerpts from /proc/cpuinfo might not be reliable. Use with
    caution.)
        cpu cores : 6
        siblings : 12
        physical 0: cores 3 4 5 6 10 11
        physical 1: cores 3 4 5 6 10 11
    cache size : 38400 KB
```

```
From /proc/meminfo
MemTotal:      264106280 kB
HugePages_Total:       0
Hugepagesize:     2048 kB
```

```
/usr/bin/lsb_release -d
Red Hat Enterprise Linux Server release 6.4 (Santiago)
```

```
From /etc/*release* /etc/*version*
redhat-release: Red Hat Enterprise Linux Server release 6.4 (Santiago)
system-release: Red Hat Enterprise Linux Server release 6.4 (Santiago)
system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server
```

```
uname -a:
Linux speccompcpu 2.6.32-358.el6.x86_64 #1 SMP Tue Jan 29 11:47:41 EST 2013
x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 May 4 23:30
```

```
SPEC is set to: /opt/cpu2006-1.4
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sdal      ext4   275G   53G  209G  21%  /
```

```
Additional information from dmidecode:
BIOS Cisco Systems, Inc. EXM4-1.2.2.1.12.012920142034 01/29/2014
Memory:
32x 8 GB
32x 0xCE00 M393B1K70QB0-YK0 8 GB 1333 MHz 2 rank
16x NO DIMM NO DIMM
```

(End of data from sysinfo program)



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Cisco Systems	SPECfp2006 =	85.9
Cisco UCS B260 M4 (Intel Xeon E7-8893 v2, 3.40 GHz)	SPECfp_base2006 =	80.8
CPU2006 license: 9019	Test date:	May-2014
Test sponsor: Cisco Systems	Hardware Availability:	May-2014
Tested by: Cisco Systems	Software Availability:	Sep-2013

General Notes

Environment variables set by runspec before the start of the run:

```
KMP_AFFINITY = "granularity=fine,compact,1,0"
LD_LIBRARY_PATH = "/opt/cpu2006-1.4/libs/32:/opt/cpu2006-1.4/libs/64:/opt/cpu2006-1.4/sh"
OMP_NUM_THREADS = "24"
```

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB memory using RedHat EL 6.4

Transparent Huge Pages enabled with:
echo always > /sys/kernel/mm/redhat_transparent_hugepage/enable
runspec command invoked through numactl i.e.:
numactl --interleave=all runspec <etc>

Submitted_by: "Sheshgiri I (shei)" <shei@cisco.com>
Submitted: Wed May 28 03:16:44 EDT 2014
Submission: cpu2006-20140505-29488.sub

Base Compiler Invocation

C benchmarks:

```
icc -m64
```

C++ benchmarks:

```
icpc -m64
```

Fortran benchmarks:

```
ifort -m64
```

Benchmarks using both Fortran and C:

```
icc -m64 ifort -m64
```

Base Portability Flags

```
410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS B260 M4 (Intel Xeon E7-8893 v2, 3.40 GHz)

SPECfp2006 = 85.9

SPECfp_base2006 = 80.8

CPU2006 license: 9019

Test sponsor: Cisco Systems

Tested by: Cisco Systems

Test date: May-2014

Hardware Availability: May-2014

Software Availability: Sep-2013

Base Portability Flags (Continued)

481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:

-xAVX -ipo -O3 -no-prec-div -parallel -opt-prefetch -ansi-alias

C++ benchmarks:

-xAVX -ipo -O3 -no-prec-div -opt-prefetch -ansi-alias

Fortran benchmarks:

-xAVX -ipo -O3 -no-prec-div -parallel -opt-prefetch

Benchmarks using both Fortran and C:

-xAVX -ipo -O3 -no-prec-div -parallel -opt-prefetch -ansi-alias

Peak Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

433.milc: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -auto-ilp32
-ansi-alias

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS B260 M4 (Intel Xeon E7-8893 v2, 3.40 GHz)

SPECfp2006 = 85.9

SPECfp_base2006 = 80.8

CPU2006 license: 9019

Test date: May-2014

Test sponsor: Cisco Systems

Hardware Availability: May-2014

Tested by: Cisco Systems

Software Availability: Sep-2013

Peak Optimization Flags (Continued)

470.lbm: basepeak = yes

482.sphinx3: -xAVX -ipo -O3 -no-prec-div -unroll12 -ansi-alias
-parallel

C++ benchmarks:

444.namd: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -fno-alias
-auto-ilp32

447.dealII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll14 -ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll12
-inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll12
-inline-level=0 -opt-prefetch -parallel

465.tonto: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -inline-calloc
-opt-malloc-options=3 -auto -unroll14

Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

454.calculix: -xAVX -ipo -O3 -no-prec-div -auto-ilp32 -ansi-alias

481.wrf: basepeak = yes



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS B260 M4 (Intel Xeon E7-8893 v2, 3.40 GHz)

SPECfp2006 = 85.9

SPECfp_base2006 = 80.8

CPU2006 license: 9019

Test date: May-2014

Test sponsor: Cisco Systems

Hardware Availability: May-2014

Tested by: Cisco Systems

Software Availability: Sep-2013

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.html>

<http://www.spec.org/cpu2006/flags/Cisco-Platform-Settings-V1.2-revB.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.xml>

<http://www.spec.org/cpu2006/flags/Cisco-Platform-Settings-V1.2-revB.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.

Report generated on Thu Jul 24 23:56:20 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 9 June 2014.