



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## IBM Corporation


IBM System x3950 X6  
(Intel Xeon E7-8850 v2, 2.30 GHz)

SPECint®\_rate2006 = 3120

SPECint\_rate\_base2006 = 3040

CPU2006 license: 11  
Test sponsor: IBM Corporation  
Tested by: IBM Corporation

Test date: May-2014  
Hardware Availability: Jun-2014  
Software Availability: Nov-2013

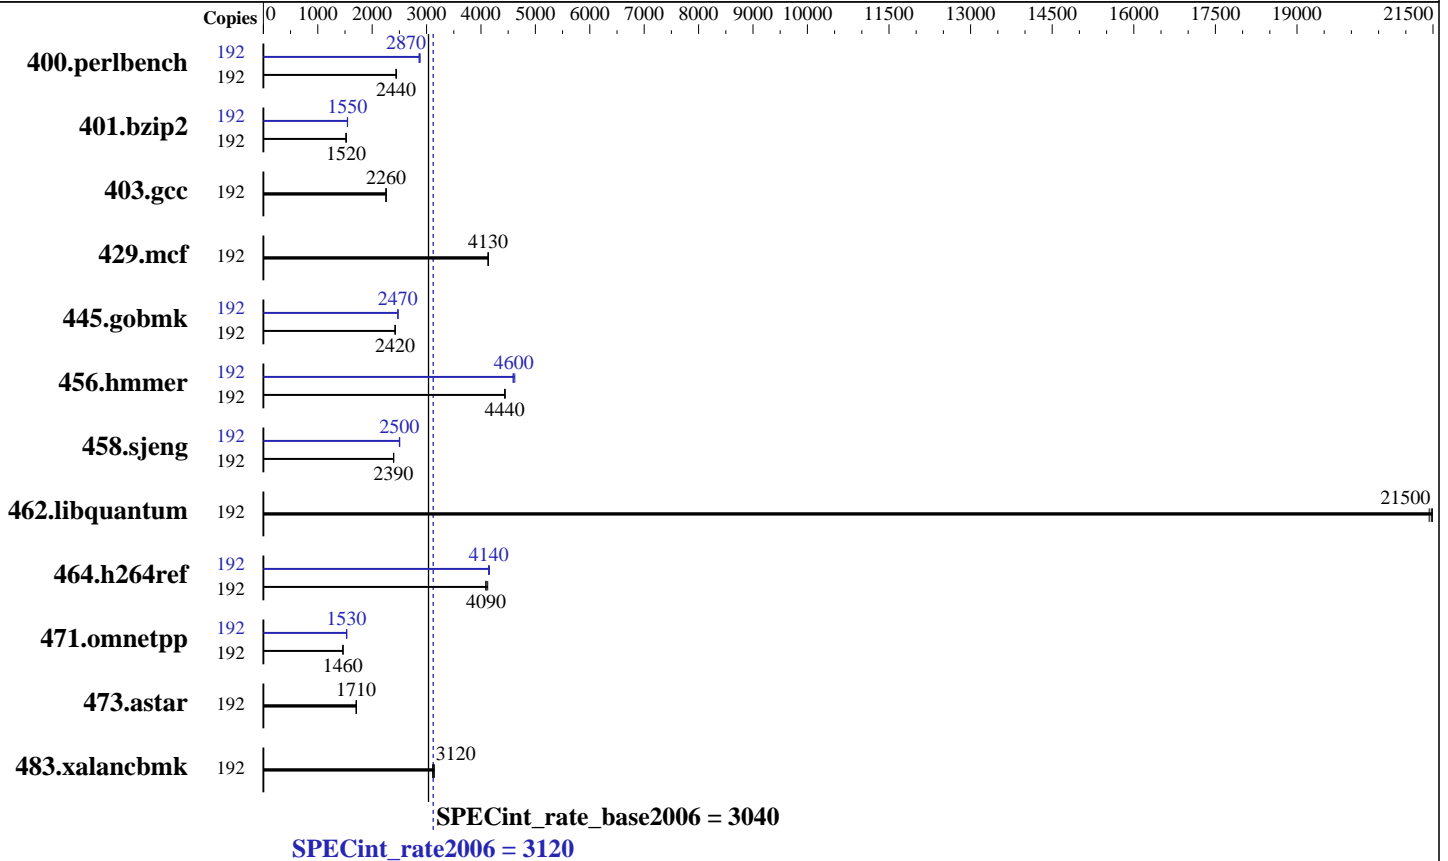

### Hardware

CPU Name: Intel Xeon E7-8850 v2  
 CPU Characteristics: Intel Turbo Boost Technology up to 2.80 GHz  
 CPU MHz: 2300  
 FPU: Integrated  
 CPU(s) enabled: 96 cores, 8 chips, 12 cores/chip, 2 threads/core  
 CPU(s) orderable: 4,6,8 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core  
 L3 Cache: 24 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 2 TB (128 x 16 GB 2Rx4 PC3L-12800R-11, ECC, running at 1066 MHz)  
 Disk Subsystem: 1 x 400 GB SATA, SSD  
 Other Hardware: None

### Software

Operating System: Red Hat Enterprise Linux Server release 6.5 (Santiago)  
 2.6.32-431.el6.x86\_64  
 Compiler: C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux  
 Auto Parallel: No  
 File System: ext4  
 System State: Run level 3 (multi-user)  
 Base Pointers: 32-bit  
 Peak Pointers: 32/64-bit  
 Other Software: Microquill SmartHeap V10.0



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## IBM Corporation

IBM System x3950 X6  
(Intel Xeon E7-8850 v2, 2.30 GHz)

SPECint\_rate2006 = 3120

SPECint\_rate\_base2006 = 3040

CPU2006 license: 11  
Test sponsor: IBM Corporation  
Tested by: IBM Corporation

Test date: May-2014  
Hardware Availability: Jun-2014  
Software Availability: Nov-2013

## Results Table

Benchmark	Base						Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	192	770	2440	766	2450	<b>768</b>	<b>2440</b>	192	656	2860	651	2880	<b>654</b>	<b>2870</b>
401.bzip2	192	<b>1216</b>	<b>1520</b>	1216	1520	1222	1520	192	1197	1550	<b>1198</b>	<b>1550</b>	1200	1540
403.gcc	192	686	2250	684	2260	<b>685</b>	<b>2260</b>	192	686	2250	684	2260	<b>685</b>	<b>2260</b>
429.mcf	192	424	4130	424	4130	<b>424</b>	<b>4130</b>	192	424	4130	424	4130	<b>424</b>	<b>4130</b>
445.gobmk	192	830	2430	832	2420	<b>832</b>	<b>2420</b>	192	814	2470	815	2470	<b>814</b>	<b>2470</b>
456.hammer	192	403	4440	404	4430	<b>403</b>	<b>4440</b>	192	388	4620	<b>389</b>	<b>4600</b>	390	4590
458.sjeng	192	970	2390	971	2390	<b>970</b>	<b>2390</b>	192	<b>928</b>	<b>2500</b>	930	2500	927	2510
462.libquantum	192	<b>185</b>	<b>21500</b>	186	21400	185	21500	192	<b>185</b>	<b>21500</b>	186	21400	185	21500
464.h264ref	192	<b>1038</b>	<b>4090</b>	1039	4090	1030	4120	192	<b>1025</b>	<b>4140</b>	1023	4160	1026	4140
471.omnetpp	192	821	1460	820	1460	<b>820</b>	<b>1460</b>	192	<b>784</b>	<b>1530</b>	784	1530	784	1530
473.astar	192	<b>789</b>	<b>1710</b>	789	1710	790	1710	192	<b>789</b>	<b>1710</b>	789	1710	790	1710
483.xalancbmk	192	<b>424</b>	<b>3120</b>	422	3140	426	3110	192	<b>424</b>	<b>3120</b>	422	3140	426	3110

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

Operating Mode set to Maximum Performance in BIOS  
Memory Data Scrambling Disabled  
Patrol Scrub Disabled  
Sysinfo program /cpu2006.1.2\_14\_aug2013/config/sysinfo.rev6818  
\$Rev: 6818 \$ \$Date:: 2012-07-17 # \$ e86d102572650a6e4d596a3cee98f191  
running on x3950x6 Tue May 20 16:21:36 2014

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:  
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo  
model name : Intel(R) Xeon(R) CPU E7-8850 v2 @ 2.30GHz  
8 "physical id"s (chips)  
192 "processors"  
cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with  
Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**IBM Corporation**

**SPECint\_rate2006 = 3120**

IBM System x3950 X6  
(Intel Xeon E7-8850 v2, 2.30 GHz)

**SPECint\_rate\_base2006 = 3040**

**CPU2006 license:** 11  
**Test sponsor:** IBM Corporation  
**Tested by:** IBM Corporation

**Test date:** May-2014  
**Hardware Availability:** Jun-2014  
**Software Availability:** Nov-2013

## Platform Notes (Continued)

```

caution.)
cpu cores : 12
siblings  : 24
physical 0: cores 0 1 2 3 4 5 8 9 10 11 12 13
physical 1: cores 0 1 2 3 4 5 8 9 10 11 12 13
physical 2: cores 0 1 2 3 4 5 8 9 10 11 12 13
physical 3: cores 0 1 2 3 4 5 8 9 10 11 12 13
physical 4: cores 0 1 2 3 4 5 8 9 10 11 12 13
physical 5: cores 0 1 2 3 4 5 8 9 10 11 12 13
physical 6: cores 0 1 2 3 4 5 8 9 10 11 12 13
physical 7: cores 0 1 2 3 4 5 8 9 10 11 12 13
cache size : 24576 KB

```

```

From /proc/meminfo
MemTotal:      2117452600 kB
HugePages_Total:      0
Hugepagesize:    2048 kB

```

```

/usr/bin/lsb_release -d
Red Hat Enterprise Linux Server release 6.5 (Santiago)

```

```

From /etc/*release* /etc/*version*
redhat-release: Red Hat Enterprise Linux Server release 6.5 (Santiago)
system-release: Red Hat Enterprise Linux Server release 6.5 (Santiago)
system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server

```

```

uname -a:
Linux x3950x6 2.6.32-431.el6.x86_64 #1 SMP Sun Nov 10 22:19:54 EST 2013
x86_64 x86_64 x86_64 GNU/Linux

```

run-level 3 May 20 11:52

```

SPEC is set to: /cpu2006.1.2_14_aug2013
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/mapper/vg_x3950x6-lv_root ext4  357G  8.3G  331G   3% /

```

```

Additional information from dmidecode:
BIOS IBM  -[A8E107JUS-1.00]- 05/02/2014
Memory:
64x Hynix HMT42GR7AFR4A-PB 16 GB 1067 MHz 2 rank
64x NO DIMM Unknown
64x Samsung M393B2G70QH0-YK0 16 GB 1067 MHz 2 rank

```

(End of data from sysinfo program)  
Memory speed from dmidecode lists the downclocked speed of the run.

## General Notes

Environment variables set by runspec before the start of the run:  
LD\_LIBRARY\_PATH = "/cpu2006.1.2\_14\_aug2013/libs/32:/cpu2006.1.2\_14\_aug2013/libs/64:/cpu2006.1.2\_14\_aug2013/sh"

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**IBM Corporation**

IBM System x3950 X6  
(Intel Xeon E7-8850 v2, 2.30 GHz)

**SPECint\_rate2006 = 3120**

**SPECint\_rate\_base2006 = 3040**

**CPU2006 license:** 11  
**Test sponsor:** IBM Corporation  
**Tested by:** IBM Corporation

**Test date:** May-2014  
**Hardware Availability:** Jun-2014  
**Software Availability:** Nov-2013

## General Notes (Continued)

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB memory using RedHat EL 6.4  
Transparent Huge Pages enabled with:  
echo always > /sys/kernel/mm/redhat\_transparent\_hugepage/enabled  
Filesystem page cache cleared with:  
echo 1> /proc/sys/vm/drop\_caches  
runspec command invoked through numactl i.e.:  
numactl --interleave=all runspec <etc>

## Base Compiler Invocation

C benchmarks:  
icc -m32  
  
C++ benchmarks:  
icpc -m32

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_LINUX\_IA32  
462.libquantum: -DSPEC\_CPU\_LINUX  
483.xalancbmk: -DSPEC\_CPU\_LINUX

## Base Optimization Flags

C benchmarks:  
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3  
  
C++ benchmarks:  
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3  
-Wl,-z,muldefs -L/sh -lsmartheap

## Base Other Flags

C benchmarks:  
403.gcc: -Dalloca=\_alloca

## Peak Compiler Invocation

C benchmarks (except as noted below):  
icc -m32

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**IBM Corporation**

IBM System x3950 X6  
(Intel Xeon E7-8850 v2, 2.30 GHz)

**SPECint\_rate2006 = 3120**

**SPECint\_rate\_base2006 = 3040**

**CPU2006 license:** 11  
**Test sponsor:** IBM Corporation  
**Tested by:** IBM Corporation

**Test date:** May-2014  
**Hardware Availability:** Jun-2014  
**Software Availability:** Nov-2013

## Peak Compiler Invocation (Continued)

400.perlbench: `icc -m64`

401.bzip2: `icc -m64`

456.hmmer: `icc -m64`

458.sjeng: `icc -m64`

C++ benchmarks:  
`icpc -m32`

## Peak Portability Flags

400.perlbench: `-DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64`  
401.bzip2: `-DSPEC_CPU_LP64`  
456.hmmer: `-DSPEC_CPU_LP64`  
458.sjeng: `-DSPEC_CPU_LP64`  
462.libquantum: `-DSPEC_CPU_LINUX`  
483.xalancbmk: `-DSPEC_CPU_LINUX`

## Peak Optimization Flags

C benchmarks:

400.perlbench: `-xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)`  
`-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)`  
`-auto-ilp32`

401.bzip2: `-xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)`  
`-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)`  
`-opt-prefetch -auto-ilp32 -ansi-alias`

403.gcc: `basepeak = yes`

429.mcf: `basepeak = yes`

445.gobmk: `-xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)`  
`-ansi-alias -opt-mem-layout-trans=3`

456.hmmer: `-xSSE4.2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32`

458.sjeng: `-xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)`  
`-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)`  
`-unroll4 -auto-ilp32`

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**IBM Corporation**

IBM System x3950 X6  
(Intel Xeon E7-8850 v2, 2.30 GHz)

**SPECint\_rate2006 = 3120**

**SPECint\_rate\_base2006 = 3040**

**CPU2006 license:** 11  
**Test sponsor:** IBM Corporation  
**Tested by:** IBM Corporation

**Test date:** May-2014  
**Hardware Availability:** Jun-2014  
**Software Availability:** Nov-2013

## Peak Optimization Flags (Continued)

462.libquantum: basepeak = yes

464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs  
-L/sh -lsmartheap

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes

## Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.html>  
<http://www.spec.org/cpu2006/flags/IBM-Platform-Flags-V1.2-IVB-A.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.xml>  
<http://www.spec.org/cpu2006/flags/IBM-Platform-Flags-V1.2-IVB-A.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Fri Jul 25 00:10:39 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 1 July 2014.