



SPEC[®] CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei
Huawei E9000 CH140

SPECfp[®]2006 = 70.0

SPECfp_base2006 = 67.1

CPU2006 license: 3175


Test sponsor: Huawei

Tested by: Huawei

Test date: Jun-2014

Hardware Availability: Sep-2013

Software Availability: Nov-2013

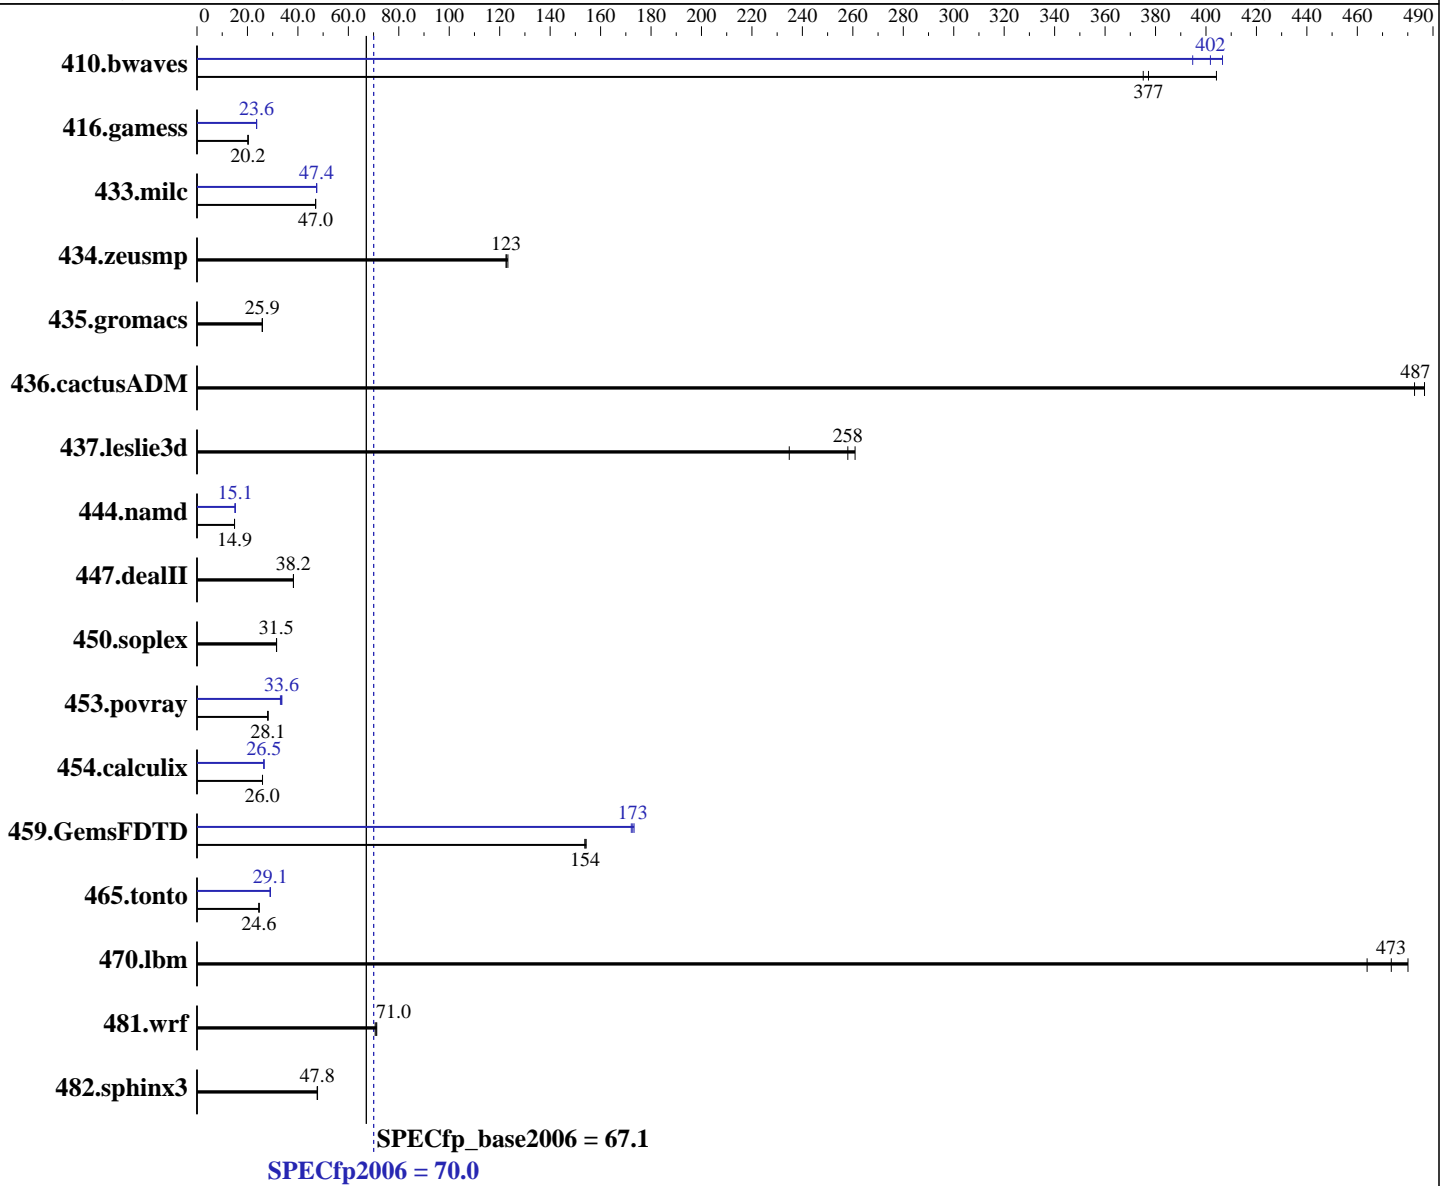

SPECfp_base2006 = 67.1

SPECfp2006 = 70.0

Hardware

CPU Name: Intel Xeon E5-2650L v2
 CPU Characteristics: Intel Turbo Boost Technology up to 2.10 GHz
 CPU MHz: 1700
 FPU: Integrated
 CPU(s) enabled: 20 cores, 2 chips, 10 cores/chip
 CPU(s) orderable: 1,2 chip
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

Software

Operating System: Red Hat Enterprise Linux Server release 6.5 (Santiago)
 2.6.32-431.el6.x86_64
 Compiler: C/C++: Version 12.1.0.225 of Intel C++ Studio XE for Linux;
 Fortran: Version 12.1.0.225 of Intel Fortran Studio XE for Linux
 Auto Parallel: Yes
 File System: ext3

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei
Huawei E9000 CH140

SPECfp2006 = 70.0
SPECfp_base2006 = 67.1

CPU2006 license: 3175
Test sponsor: Huawei
Tested by: Huawei

Test date: Jun-2014
Hardware Availability: Sep-2013
Software Availability: Nov-2013

L3 Cache: 25 MB I+D on chip per chip
Other Cache: None
Memory: 128 GB (8 x 16 GB 2Rx4 PC3-14900R-13, ECC)
Disk Subsystem: 1 x 500 GB SATA, 7200RPM
Other Hardware: None

System State: Run level 3 (multi-user)
Base Pointers: 64-bit
Peak Pointers: 32/64-bit
Other Software: None

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	36.2	375	36.0	377	33.6	404	33.8	402	33.4	407	34.4	395
416.gamess	967	20.2	967	20.2	967	20.2	829	23.6	829	23.6	829	23.6
433.milc	195	47.0	195	47.0	195	47.0	194	47.4	194	47.4	194	47.4
434.zeusmp	74.2	123	73.8	123	74.2	123	74.2	123	73.8	123	74.2	123
435.gromacs	276	25.9	275	25.9	276	25.9	276	25.9	275	25.9	276	25.9
436.cactusADM	24.6	487	24.6	487	24.8	483	24.6	487	24.6	487	24.8	483
437.leslie3d	36.4	258	40.0	235	36.0	261	36.4	258	40.0	235	36.0	261
444.namd	539	14.9	539	14.9	539	14.9	530	15.1	530	15.1	530	15.1
447.dealII	299	38.2	299	38.2	299	38.2	299	38.2	299	38.2	299	38.2
450.soplex	264	31.6	265	31.5	265	31.5	264	31.6	265	31.5	265	31.5
453.povray	189	28.2	189	28.1	190	28.0	158	33.6	161	33.1	159	33.6
454.calculix	318	26.0	318	26.0	318	26.0	311	26.5	311	26.5	311	26.5
459.GemsFDTD	69.0	154	69.0	154	68.8	154	61.6	172	61.2	173	61.4	173
465.tonto	400	24.6	400	24.6	400	24.6	339	29.0	339	29.1	339	29.1
470.lbm	28.6	480	29.0	473	29.6	464	28.6	480	29.0	473	29.6	464
481.wrf	157	71.3	157	71.0	158	70.6	157	71.3	157	71.0	158	70.6
482.sphinx3	408	47.8	408	47.8	409	47.6	408	47.8	408	47.8	409	47.6

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

BIOS configuration:
Set Power Efficiency Mode to Performance
Set Hypertreading Mode to Disabled
Baseboard Management Controller used to adjust the fan speed to 100%
Sysinfo program /spec/config/sysinfo.rev6800
\$Rev: 6800 \$ \$Date:: 2011-10-11 #\$ 6f2ebdff5032aaa42e583f96b07f99d3
running on localhost Mon Jun 9 20:57:20 2014

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei	SPECfp2006 =	70.0
Huawei E9000 CH140	SPECfp_base2006 =	67.1

CPU2006 license: 3175	Test date: Jun-2014
Test sponsor: Huawei	Hardware Availability: Sep-2013
Tested by: Huawei	Software Availability: Nov-2013

Platform Notes (Continued)

<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```

From /proc/cpuinfo
  model name : Intel(R) Xeon(R) CPU E5-2650L v2 @ 1.70GHz
    2 "physical id"s (chips)
    20 "processors"
  cores, siblings (Caution: counting these is hw and system dependent. The
  following excerpts from /proc/cpuinfo might not be reliable. Use with
  caution.)
    cpu cores : 10
    siblings  : 10
    physical 0: cores 0 1 2 3 4 8 9 10 11 12
    physical 1: cores 0 1 2 3 4 8 9 10 11 12
  cache size : 25600 KB

```

```

From /proc/meminfo
  MemTotal:      132114848 kB
  HugePages_Total:      0
  Hugepagesize:    2048 kB

```

```

/usr/bin/lsb_release -d
  Red Hat Enterprise Linux Server release 6.5 (Santiago)

```

```

From /etc/*release* /etc/*version*
  redhat-release: Red Hat Enterprise Linux Server release 6.5 (Santiago)
  system-release: Red Hat Enterprise Linux Server release 6.5 (Santiago)
  system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server

```

```

uname -a:
  Linux localhost 2.6.32-431.el6.x86_64 #1 SMP Sun Nov 10 22:19:54 EST 2013
  x86_64 x86_64 x86_64 GNU/Linux

```

run-level 3 Jun 9 12:05

```

SPEC is set to: /spec
  Filesystem      Type  Size  Used Avail Use% Mounted on
  /dev/sda2       ext3  455G  101G  331G  24% /

```

```

Additional information from dmidecode:
  Memory:
    8x Samsung M393B2G70BH0-CMA 16 GB 1866 MHz 2 rank

```

(End of data from sysinfo program)

General Notes

```

Environment variables set by runspec before the start of the run:
  KMP_AFFINITY = "granularity=fine,compact,0,1"
  LD_LIBRARY_PATH = "/spec/libs/32:/spec/libs/64"
  OMP_NUM_THREADS = "20"

```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei	SPECfp2006 =	70.0
Huawei E9000 CH140	SPECfp_base2006 =	67.1

CPU2006 license: 3175	Test date: Jun-2014
Test sponsor: Huawei	Hardware Availability: Sep-2013
Tested by: Huawei	Software Availability: Nov-2013

General Notes (Continued)

Binaries compiled on a system with 2 x Xeon X5645 CPU + 16GB memory using RHEL 6.1
 Transparent Huge Pages enabled with:
 echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled

Base Compiler Invocation

C benchmarks:
 icc -m64

C++ benchmarks:
 icpc -m64

Fortran benchmarks:
 ifort -m64

Benchmarks using both Fortran and C:
 icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
 416.gamess: -DSPEC_CPU_LP64
 433.milc: -DSPEC_CPU_LP64
 434.zeusmp: -DSPEC_CPU_LP64
 435.gromacs: -DSPEC_CPU_LP64 -nofor_main
 436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
 437.leslie3d: -DSPEC_CPU_LP64
 444.namd: -DSPEC_CPU_LP64
 447.dealII: -DSPEC_CPU_LP64
 450.soplex: -DSPEC_CPU_LP64
 453.povray: -DSPEC_CPU_LP64
 454.calculix: -DSPEC_CPU_LP64 -nofor_main
 459.GemsFDTD: -DSPEC_CPU_LP64
 465.tonto: -DSPEC_CPU_LP64
 470.lbm: -DSPEC_CPU_LP64
 481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
 482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:
 -xAVX -ipo -O3 -no-prec-div -static -parallel -opt-prefetch
 -ansi-alias

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei	SPECfp2006 =	70.0
Huawei E9000 CH140	SPECfp_base2006 =	67.1

CPU2006 license: 3175
Test sponsor: Huawei
Tested by: Huawei

Test date: Jun-2014
Hardware Availability: Sep-2013
Software Availability: Nov-2013

Base Optimization Flags (Continued)

C++ benchmarks:

`-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -ansi-alias`

Fortran benchmarks:

`-xAVX -ipo -O3 -no-prec-div -static -parallel -opt-prefetch`

Benchmarks using both Fortran and C:

`-xAVX -ipo -O3 -no-prec-div -static -parallel -opt-prefetch
-ansi-alias`

Peak Compiler Invocation

C benchmarks:

`icc -m64`

C++ benchmarks:

`icpc -m64`

Fortran benchmarks:

`ifort -m64`

Benchmarks using both Fortran and C:

`icc -m64 ifort -m64`

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

433.milc: `-xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -static -auto-ilp32
-ansi-alias`

470.lbm: `basepeak = yes`

482.sphinx3: `basepeak = yes`

C++ benchmarks:

444.namd: `-xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -fno-alias
-auto-ilp32`

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei	SPECfp2006 =	70.0
Huawei E9000 CH140	SPECfp_base2006 =	67.1

CPU2006 license: 3175	Test date: Jun-2014
Test sponsor: Huawei	Hardware Availability: Sep-2013
Tested by: Huawei	Software Availability: Nov-2013

Peak Optimization Flags (Continued)

447.dealII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: -xAVX -ipo -O3 -no-prec-div -opt-prefetch -parallel
-static

416.gamess: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2
-inline-level=0 -scalar-rep- -static

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2
-inline-level=0 -opt-prefetch -parallel

465.tonto: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -inline-calloc
-opt-malloc-options=3 -auto -unroll4

Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

454.calculix: -xAVX -ipo -O3 -no-prec-div -auto-ilp32 -ansi-alias

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20120425.html>
<http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-V1.0-IVB-RevG.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20120425.xml>
<http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-V1.0-IVB-RevG.xml>



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei	SPECfp2006 =	70.0
Huawei E9000 CH140	SPECfp_base2006 =	67.1

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Jun-2014

Hardware Availability: Sep-2013

Software Availability: Nov-2013

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Fri Jul 25 00:02:54 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 8 July 2014.