



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

Supermicro SuperServer 4047R-7JRFT
X9QR7-JTF, Intel Xeon E5-4610 v2)

SPECint®2006 = 43.7

SPECint_base2006 = 41.0

CPU2006 license: 001176


Test sponsor: Supermicro

Tested by: Supermicro

Test date: Jun-2014

Hardware Availability: Mar-2014

Software Availability: Sep-2013

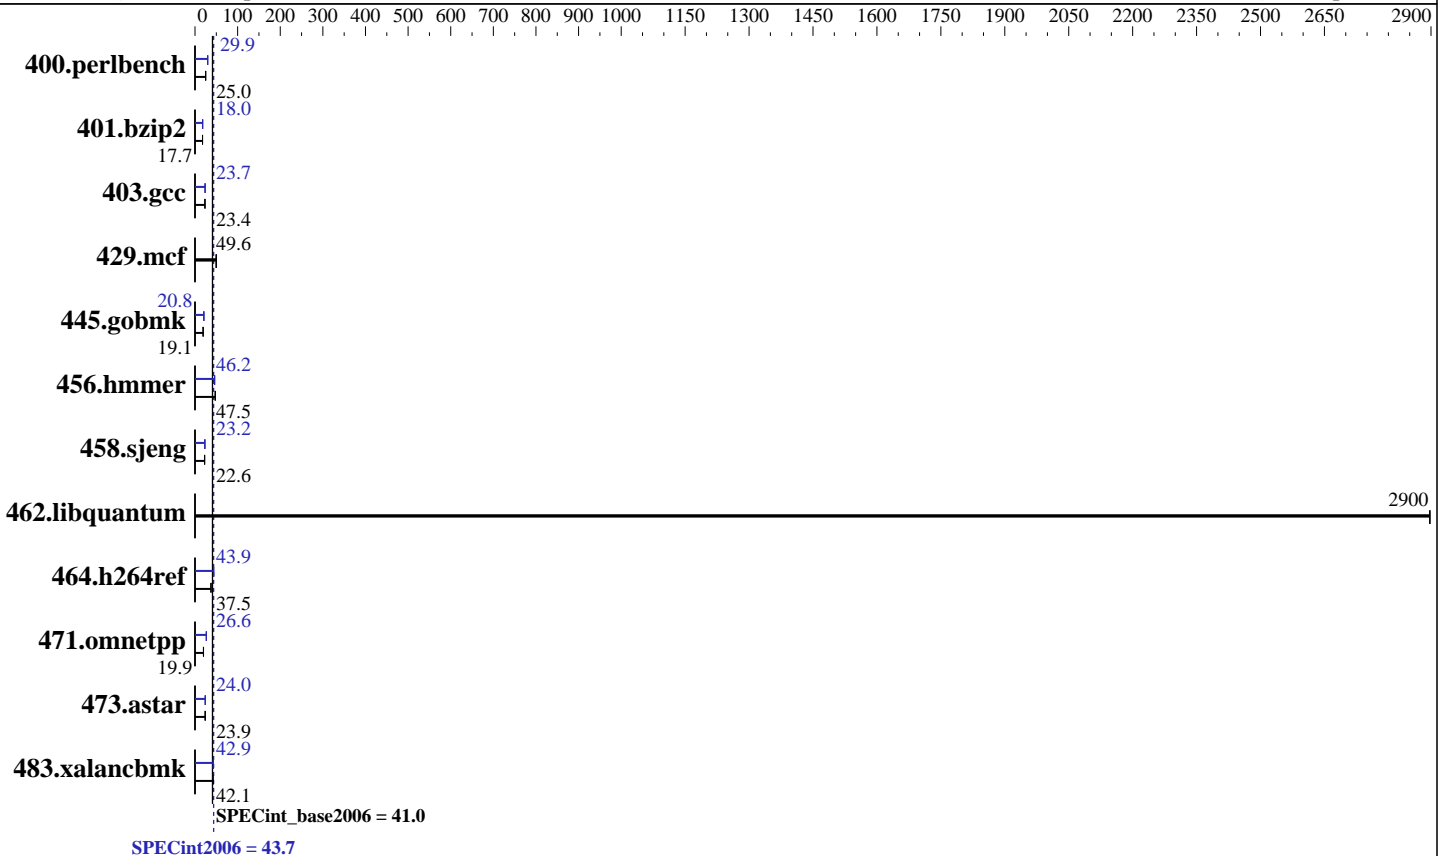

Hardware

CPU Name: Intel Xeon E5-4610 v2
 CPU Characteristics: Intel Turbo Boost Technology up to 2.70 GHz
 CPU MHz: 2300
 FPU: Integrated
 CPU(s) enabled: 32 cores, 4 chips, 8 cores/chip
 CPU(s) orderable: 1,2,4 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core
 L3 Cache: 16 MB I+D on chip per chip
 Other Cache: None
 Memory: 256 GB (16 x 16 GB 2Rx4 PC3-14900R-13, ECC, running at 1600 MHz)
 Disk Subsystem: 1 x 750 GB SATA II, 7200 RPM
 Other Hardware: None

Software

Operating System: Red Hat Enterprise Linux Server release 6.4, Kernel 2.6.32-358.23.2.el6.x86_64
 Compiler: C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux;
 Fortran: Version 14.0.0.080 of Intel Fortran Studio XE for Linux
 Auto Parallel: Yes
 File System: ext4
 System State: Run level 3 (multi-user)
 Base Pointers: 32/64-bit
 Peak Pointers: 32/64-bit
 Other Software: Microquill SmartHeap V10.0



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

Supermicro SuperServer 4047R-7JRFT
X9QR7-JTF, Intel Xeon E5-4610 v2)

SPECint2006 = 43.7

SPECint_base2006 = 41.0

CPU2006 license: 001176
Test sponsor: Supermicro
Tested by: Supermicro

Test date: Jun-2014
Hardware Availability: Mar-2014
Software Availability: Sep-2013

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	388	25.1	392	24.9	391	25.0	329	29.7	327	29.9	327	29.9
401.bzip2	546	17.7	547	17.6	544	17.7	537	18.0	536	18.0	536	18.0
403.gcc	345	23.4	345	23.4	344	23.4	338	23.8	340	23.6	340	23.7
429.mcf	184	49.6	181	50.5	185	49.3	184	49.6	181	50.5	185	49.3
445.gobmk	549	19.1	549	19.1	549	19.1	506	20.7	502	20.9	505	20.8
456.hammer	197	47.4	197	47.5	196	47.6	202	46.2	202	46.2	204	45.8
458.sjeng	537	22.5	536	22.6	535	22.6	523	23.1	522	23.2	522	23.2
462.libquantum	7.15	2900	7.15	2900	7.15	2900	7.15	2900	7.15	2900	7.15	2900
464.h264ref	589	37.6	591	37.4	590	37.5	506	43.8	504	43.9	504	43.9
471.omnetpp	312	20.0	317	19.7	314	19.9	236	26.5	235	26.6	235	26.7
473.astar	294	23.9	292	24.0	294	23.9	292	24.1	292	24.0	292	24.0
483.xalancbmk	163	42.4	164	42.1	164	42.0	161	42.9	161	42.9	160	43.1

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

BIOS Configuration:
Disable Hyper-Threading, C1E Support, DRAM RAPL Mode, Demand Scrub, Double Refresh.
Set Package C-state Limit to C0

General Notes

Environment variables set by runspec before the start of the run:
KMP_AFFINITY = "granularity=fine,compact,0,1"
LD_LIBRARY_PATH = "/usr/cpu2006/libs/32:/usr/cpu2006/libs/64:/usr/cpu2006/sh"
OMP_NUM_THREADS = "32"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB
memory using RedHat EL 6.4
Transparent Huge Pages enabled with:
echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled
runspec command invoked through numactl i.e.:
numactl --interleave=all runspec <etc>



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

Supermicro SuperServer 4047R-7JRFT
X9QR7-JTF, Intel Xeon E5-4610 v2)

SPECint2006 = 43.7

SPECint_base2006 = 41.0

CPU2006 license: 001176
Test sponsor: Supermicro
Tested by: Supermicro

Test date: Jun-2014
Hardware Availability: Mar-2014
Software Availability: Sep-2013

Base Compiler Invocation

C benchmarks:
icc -m64

C++ benchmarks:
icpc -m64

Base Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
403.gcc: -DSPEC_CPU_LP64
429.mcf: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
471.omnetpp: -DSPEC_CPU_LP64
473.astar: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:
-xAVX -ipo -O3 -no-prec-div -parallel -opt-prefetch -auto-p32

C++ benchmarks:
-xAVX -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -Wl,-z,muldefs
-L/sh -lsmartheap64

Base Other Flags

C benchmarks:
403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):
icc -m64

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

Supermicro SuperServer 4047R-7JRFT
X9QR7-JTF, Intel Xeon E5-4610 v2)

SPECint2006 = 43.7

SPECint_base2006 = 41.0

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: Jun-2014

Hardware Availability: Mar-2014

Software Availability: Sep-2013

Peak Compiler Invocation (Continued)

400.perlbench: `icc -m32`

445.gobmk: `icc -m32`

464.h264ref: `icc -m32`

C++ benchmarks (except as noted below):

`icpc -m32`

473.astar: `icpc -m64`

Peak Portability Flags

400.perlbench: `-DSPEC_CPU_LINUX_IA32`

401.bzip2: `-DSPEC_CPU_LP64`

403.gcc: `-DSPEC_CPU_LP64`

429.mcf: `-DSPEC_CPU_LP64`

456.hmmer: `-DSPEC_CPU_LP64`

458.sjeng: `-DSPEC_CPU_LP64`

462.libquantum: `-DSPEC_CPU_LP64 -DSPEC_CPU_LINUX`

473.astar: `-DSPEC_CPU_LP64`

483.xalancbmk: `-DSPEC_CPU_LINUX`

Peak Optimization Flags

C benchmarks:

400.perlbench: `-xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -opt-prefetch
-ansi-alias`

401.bzip2: `-xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div -prof-use(pass 2) -auto-ilp32 -opt-prefetch
-ansi-alias`

403.gcc: `-xAVX -ipo -O3 -no-prec-div -inline-calloc
-opt-malloc-options=3 -auto-ilp32`

429.mcf: `basepeak = yes`

445.gobmk: `-xAVX(pass 2) -prof-gen(pass 1) -prof-use(pass 2)
-ansi-alias`

456.hmmer: `-xAVX -ipo -O3 -no-prec-div -unroll2 -auto-ilp32
-ansi-alias`

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

Supermicro SuperServer 4047R-7JRFT
X9QR7-JTF, Intel Xeon E5-4610 v2)

SPECint2006 = 43.7

SPECint_base2006 = 41.0

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: Jun-2014

Hardware Availability: Mar-2014

Software Availability: Sep-2013

Peak Optimization Flags (Continued)

458.sjeng: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4

462.libquantum: basepeak = yes

464.h264ref: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2
-ansi-alias

C++ benchmarks:

471.omnetpp: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2)
-opt-ra-region-strategy=block -ansi-alias
-Wl,-z,muldefs -L/sh -lsmartheap

473.astar: -xAVX -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-Wl,-z,muldefs -L/sh -lsmartheap64

483.xalancbmk: -xAVX -ipo -O3 -no-prec-div -opt-prefetch -ansi-alias
-Wl,-z,muldefs -L/sh -lsmartheap

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64-revC.html>

<http://www.spec.org/cpu2006/flags/Supermicro-Platform-Settings-V1.2-revD.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64-revC.xml>

<http://www.spec.org/cpu2006/flags/Supermicro-Platform-Settings-V1.2-revD.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Fri Jul 25 00:19:53 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 23 July 2014.