



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECint®2006 = 50.2

Huawei CH240 (Intel Xeon E5-4620 v2)

SPECint_base2006 = 46.1

CPU2006 license: 3175


Test sponsor: Huawei

Tested by: Huawei

Test date: May-2014

Hardware Availability: Mar-2014

Software Availability: Nov-2013

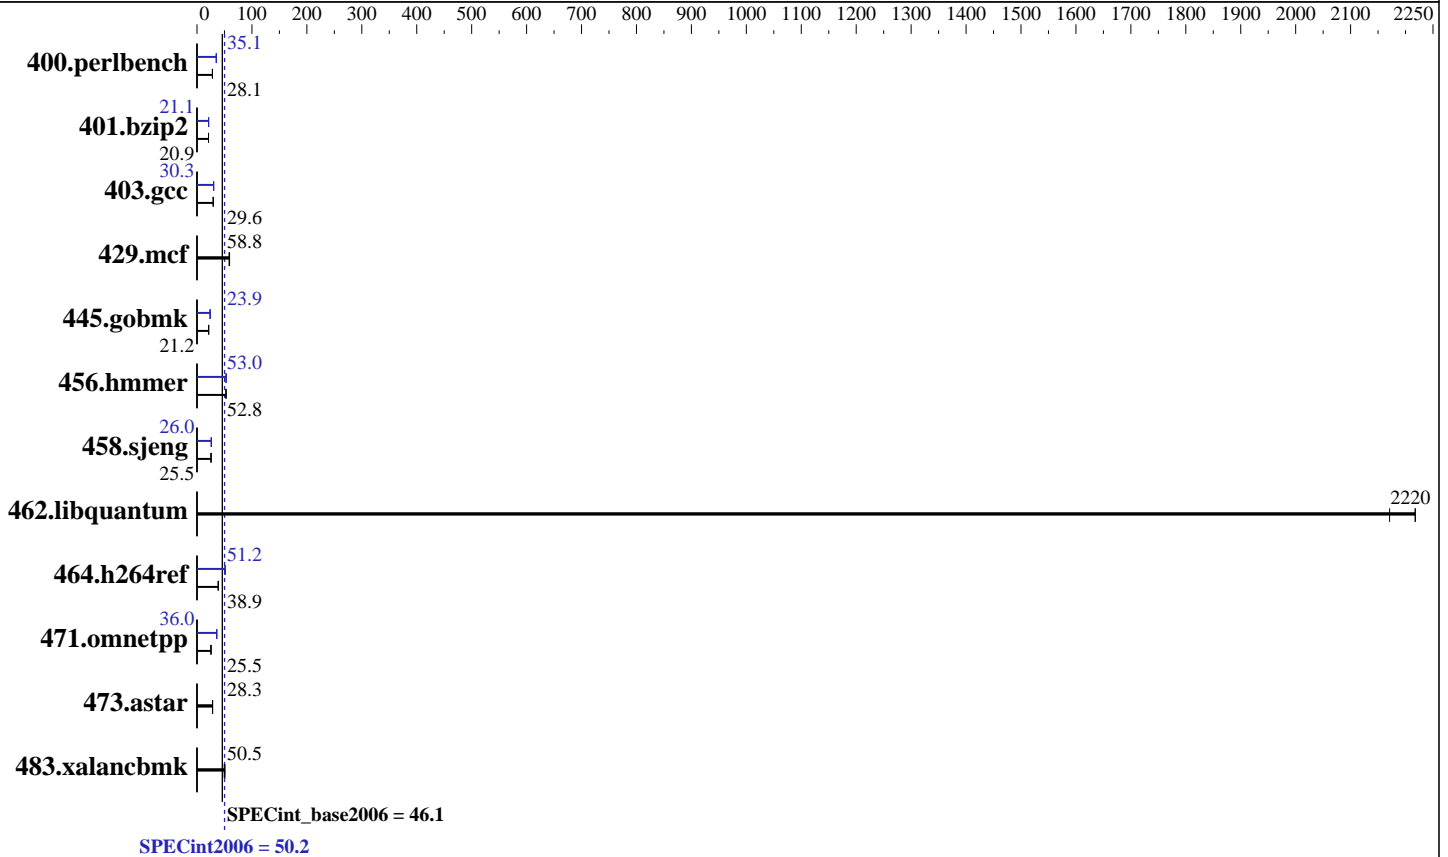

Hardware

CPU Name: Intel Xeon E5-4620 v2
 CPU Characteristics: Intel Turbo Boost Technology up to 3.00 GHz
 CPU MHz: 2600
 FPU: Integrated
 CPU(s) enabled: 32 cores, 4 chips, 8 cores/chip
 CPU(s) orderable: 2,4 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core
 L3 Cache: 20 MB I+D on chip per chip
 Other Cache: None
 Memory: 256 GB (32 x 8 GB 2Rx8 PC3-12800R-11, ECC)
 Disk Subsystem: 1 x 300 GB SAS, 7200 RPM
 Other Hardware: None

Software

Operating System: Red Hat Enterprise Linux Server release 6.5 (Santiago)
 2.6.32-431.el6.x86_64
 Compiler: C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux
 Auto Parallel: Yes
 File System: ext4
 System State: Run level 3 (multi-user)
 Base Pointers: 32/64-bit
 Peak Pointers: 32/64-bit
 Other Software: Microquill SmartHeap V10.0



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECint2006 = **50.2**

Huawei CH240 (Intel Xeon E5-4620 v2)

SPECint_base2006 = **46.1**

CPU2006 license: 3175
Test sponsor: Huawei
Tested by: Huawei

Test date: May-2014
Hardware Availability: Mar-2014
Software Availability: Nov-2013

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	348	28.1	348	28.1	347	28.2	278	35.2	278	35.1	278	35.1
401.bzip2	461	20.9	461	20.9	460	21.0	457	21.1	456	21.1	456	21.2
403.gcc	272	29.6	272	29.6	272	29.6	266	30.3	266	30.3	266	30.3
429.mcf	155	58.8	156	58.6	154	59.3	155	58.8	156	58.6	154	59.3
445.gobmk	496	21.2	497	21.1	492	21.3	438	23.9	439	23.9	439	23.9
456.hammer	177	52.8	177	52.8	176	52.9	176	53.1	176	53.0	177	52.8
458.sjeng	474	25.5	473	25.6	474	25.5	465	26.0	465	26.0	465	26.0
462.libquantum	9.34	2220	9.54	2170	9.34	2220	9.34	2220	9.54	2170	9.34	2220
464.h264ref	576	38.4	568	38.9	569	38.9	432	51.2	433	51.1	433	51.2
471.omnetpp	244	25.6	245	25.5	245	25.5	174	35.9	174	36.0	174	36.0
473.astar	246	28.5	248	28.3	249	28.2	246	28.5	248	28.3	249	28.2
483.xalancbmk	137	50.5	136	50.7	139	49.5	137	50.5	136	50.7	139	49.5

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

```
Sysinfo program /spec/config/sysinfo.rev6818
$Rev: 6818 $ $Date:: 2012-07-17 #$ e86d102572650a6e4d596a3cee98f191
running on localhost Tue Jun 3 10:53:41 2014
```

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see: <http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E5-4620 v2 @ 2.60GHz
4 "physical id"s (chips)
32 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
cpu cores : 8
siblings : 8
physical 0: cores 0 1 2 3 4 5 6 7
physical 1: cores 0 1 2 3 4 5 6 7
physical 2: cores 0 1 2 3 4 5 6 7
physical 3: cores 0 1 2 3 4 5 6 7
cache size : 20480 KB
```

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei	SPECint2006 =	50.2
Huawei CH240 (Intel Xeon E5-4620 v2)	SPECint_base2006 =	46.1

CPU2006 license: 3175	Test date: May-2014
Test sponsor: Huawei	Hardware Availability: Mar-2014
Tested by: Huawei	Software Availability: Nov-2013

Platform Notes (Continued)

```

From /proc/meminfo
  MemTotal:      264479484 kB
  HugePages_Total:      0
  Hugepagesize:    2048 kB

/usr/bin/lsb_release -d
  Red Hat Enterprise Linux Server release 6.5 (Santiago)

From /etc/*release* /etc/*version*
  redhat-release: Red Hat Enterprise Linux Server release 6.5 (Santiago)
  system-release: Red Hat Enterprise Linux Server release 6.5 (Santiago)
  system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server

uname -a:
  Linux localhost 2.6.32-431.el6.x86_64 #1 SMP Sun Nov 10 22:19:54 EST 2013
  x86_64 x86_64 x86_64 GNU/Linux

run-level 3 Jun 3 10:37

SPEC is set to: /spec
  Filesystem      Type  Size  Used Avail Use% Mounted on
  /dev/sda2       ext4  245G  17G  216G   8% /

Additional information from dmidecode:
  BIOS Insyde Corp. OARYV388 04/23/2014
  Memory:
    16x NO DIMM NO DIMM
    32x Samsung M393B1G73BH0-CK0 8 GB 1600 MHz 2 rank

(End of data from sysinfo program)

```

General Notes

Environment variables set by runspec before the start of the run:
LD_LIBRARY_PATH = "/spec/libs/32:/spec/libs/64:/spec/sh"
OMP_NUM_THREADS = "32"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB memory using RedHat EL 6.4
Transparent Huge Pages enabled with:
echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled
runspec command invoked through numactl i.e.:
numactl --interleave=all runspec <etc>

Base Compiler Invocation

C benchmarks:
icc -m64

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECint2006 = 50.2

Huawei CH240 (Intel Xeon E5-4620 v2)

SPECint_base2006 = 46.1

CPU2006 license: 3175
Test sponsor: Huawei
Tested by: Huawei

Test date: May-2014
Hardware Availability: Mar-2014
Software Availability: Nov-2013

Base Compiler Invocation (Continued)

C++ benchmarks:
icpc -m64

Base Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
403.gcc: -DSPEC_CPU_LP64
429.mcf: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
471.omnetpp: -DSPEC_CPU_LP64
473.astar: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:
-xSSE4.2 -ipo -O3 -no-prec-div -parallel -opt-prefetch -auto-p32
C++ benchmarks:
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-Wl,-z,muldefs -L/sh -lsmartheap64

Base Other Flags

C benchmarks:
403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):
icc -m64
400.perlbench: icc -m32
445.gobmk: icc -m32

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECint2006 = 50.2

Huawei CH240 (Intel Xeon E5-4620 v2)

SPECint_base2006 = 46.1

CPU2006 license: 3175

Test date: May-2014

Test sponsor: Huawei

Hardware Availability: Mar-2014

Tested by: Huawei

Software Availability: Nov-2013

Peak Compiler Invocation (Continued)

464.h264ref: icc -m32

C++ benchmarks (except as noted below):

icpc -m64

471.omnetpp: icpc -m32

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
 401.bzip2: -DSPEC_CPU_LP64
 403.gcc: -DSPEC_CPU_LP64
 429.mcf: -DSPEC_CPU_LP64
 456.hmmer: -DSPEC_CPU_LP64
 458.sjeng: -DSPEC_CPU_LP64
 462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
 473.astar: -DSPEC_CPU_LP64
 483.xalancbmk: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
 -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
 -opt-prefetch -ansi-alias

401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
 -O3(pass 2) -no-prec-div -prof-use(pass 2) -auto-ilp32
 -opt-prefetch -ansi-alias

403.gcc: -xSSE4.2 -ipo -O3 -no-prec-div -inline-calloc
 -opt-malloc-options=3 -auto-ilp32

429.mcf: basepeak = yes

445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)
 -ansi-alias

456.hmmer: -xSSE4.2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32
 -ansi-alias

458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
 -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
 -unroll4

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECint2006 = 50.2

Huawei CH240 (Intel Xeon E5-4620 v2)

SPECint_base2006 = 46.1

CPU2006 license: 3175

Test date: May-2014

Test sponsor: Huawei

Hardware Availability: Mar-2014

Tested by: Huawei

Software Availability: Nov-2013

Peak Optimization Flags (Continued)

462.libquantum: basepeak = yes

464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-opt-ra-region-strategy=block -ansi-alias
-Wl,-z,muldefs -L/sh -lsmartheap

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.html>

<http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-V1.0-IVB-RevG.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.xml>

<http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-V1.0-IVB-RevG.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Fri Jul 25 00:26:31 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 15 July 2014.