



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

**SPECint\_rate2006 = 1260**

Huawei RH2485 v2 (Intel Xeon E5-4620 v2)

**SPECint\_rate\_base2006 = 1210**

CPU2006 license: 3175


**Test date:** Jun-2014

**Test sponsor:** Huawei

**Hardware Availability:** Feb-2014

**Tested by:** Huawei

**Software Availability:** Nov-2013

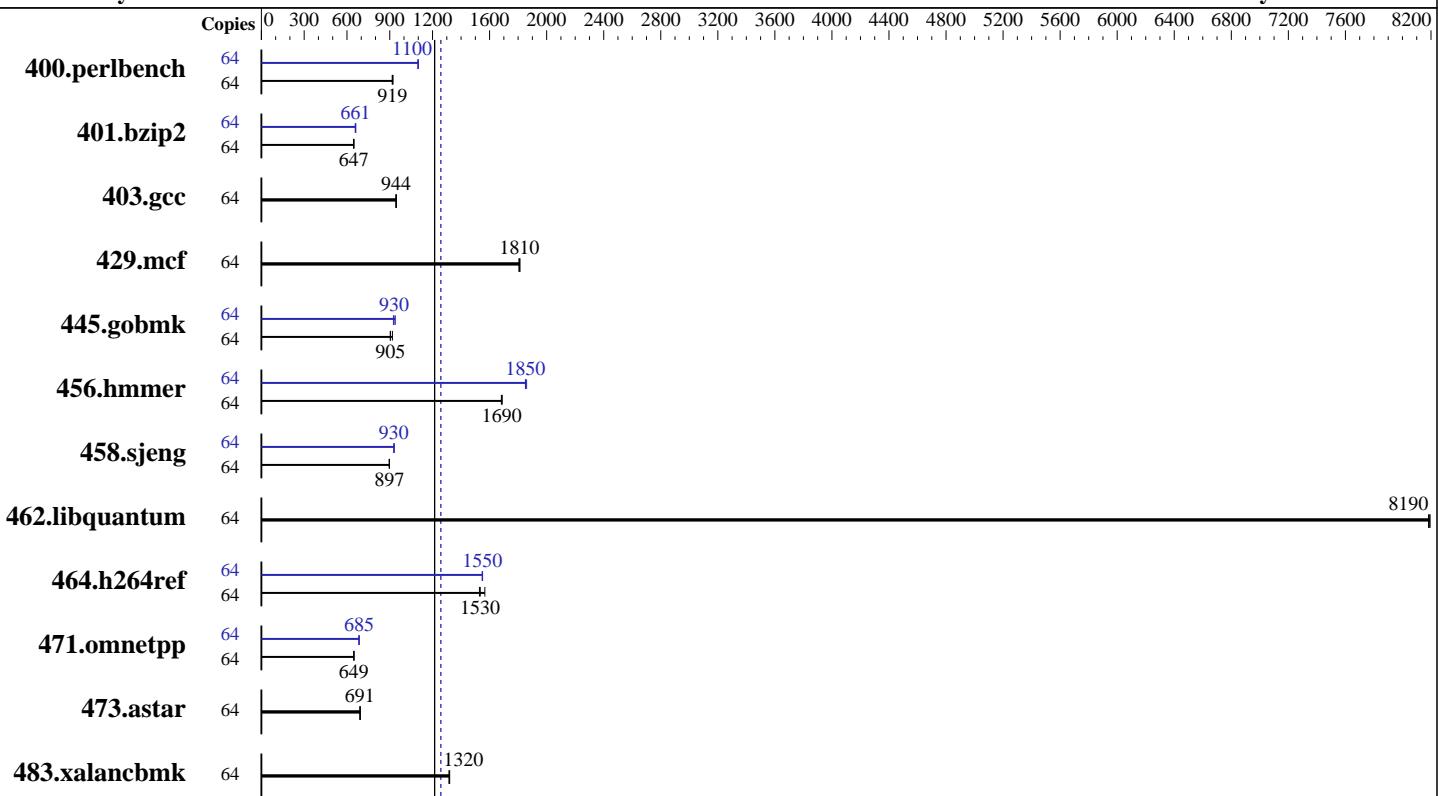

## Hardware

CPU Name: Intel Xeon E5-4620 v2  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.00 GHz  
 CPU MHz: 2600  
 FPU: Integrated  
 CPU(s) enabled: 32 cores, 4 chips, 8 cores/chip, 2 threads/core  
 CPU(s) orderable: 2,4 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core  
 L3 Cache: 20 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 512 GB (32 x 16 GB 2Rx4 PC3-12800R-11, ECC)  
 Disk Subsystem: 4 x 300 GB SAS, 10K RPM  
 Other Hardware: None

## Software

Operating System: Red Hat Enterprise Linux Server release 6.5 (Santiago)  
 Compiler: 2.6.32-431.el6.x86\_64  
 Auto Parallel: C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux  
 File System: ext4  
 System State: Run level 3 (multi-user)  
 Base Pointers: 32-bit  
 Peak Pointers: 32/64-bit  
 Other Software: Microquill SmartHeap V10.0



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

**SPECint\_rate2006 = 1260**

Huawei RH2485 v2 (Intel Xeon E5-4620 v2)

**SPECint\_rate\_base2006 = 1210**

CPU2006 license: 3175

Test date: Jun-2014

Test sponsor: Huawei

Hardware Availability: Feb-2014

Tested by: Huawei

Software Availability: Nov-2013

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	64	682	917	<b>680</b>	<b>919</b>	677	923	64	<b>569</b>	<b>1100</b>	569	1100	569	1100
401.bzip2	64	955	647	<b>954</b>	<b>647</b>	951	649	64	<b>934</b>	<b>661</b>	939	658	934	661
403.gcc	64	544	947	546	943	<b>546</b>	<b>944</b>	64	<b>544</b>	<b>947</b>	546	943	<b>546</b>	<b>944</b>
429.mcf	64	323	1810	<b>322</b>	<b>1810</b>	322	1810	64	323	1810	<b>322</b>	<b>1810</b>	322	1810
445.gobmk	64	<b>742</b>	<b>905</b>	743	904	731	919	64	715	939	<b>722</b>	<b>930</b>	725	926
456.hammer	64	354	1690	355	1680	<b>354</b>	<b>1690</b>	64	321	1860	<b>322</b>	<b>1850</b>	323	1850
458.sjeng	64	864	896	<b>863</b>	<b>897</b>	863	898	64	833	929	<b>833</b>	<b>930</b>	832	931
462.libquantum	64	<b>162</b>	<b>8190</b>	162	8190	162	8180	64	<b>162</b>	<b>8190</b>	162	8190	162	8180
464.h264ref	64	926	1530	<b>923</b>	<b>1530</b>	904	1570	64	<b>914</b>	<b>1550</b>	913	1550	915	1550
471.omnetpp	64	617	648	616	649	<b>617</b>	<b>649</b>	64	584	685	<b>584</b>	<b>685</b>	585	684
473.astar	64	<b>650</b>	<b>691</b>	650	691	648	694	64	<b>650</b>	<b>691</b>	650	691	648	694
483.xalancbmk	64	<b>335</b>	<b>1320</b>	336	1320	335	1320	64	<b>335</b>	<b>1320</b>	336	1320	335	1320

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

BIOS configuration:

Set Power Efficiency Mode to Performance

Set Lock\_step to disabled

Baseboard Management Controller used to adjust the fan speed to 100%

Sysinfo program /spec/config/sysinfo.rev6818

\$Rev: 6818 \$ \$Date::: 2012-07-17 #\\$ e86d102572650a6e4d596a3cee98f191

running on 2485-65 Fri Jun 20 06:40:01 2014

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:

<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : Intel(R) Xeon(R) CPU E5-4620 v2 @ 2.60GHz

4 "physical id"s (chips)

64 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

**SPECint\_rate2006 = 1260**

Huawei RH2485 v2 (Intel Xeon E5-4620 v2)

**SPECint\_rate\_base2006 = 1210**

**CPU2006 license:** 3175

**Test date:** Jun-2014

**Test sponsor:** Huawei

**Hardware Availability:** Feb-2014

**Tested by:** Huawei

**Software Availability:** Nov-2013

## Platform Notes (Continued)

following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

```
cpu cores : 8
siblings   : 16
physical 0: cores 0 1 2 3 4 5 6 7
physical 1: cores 0 1 2 3 4 5 6 7
physical 2: cores 0 1 2 3 4 5 6 7
physical 3: cores 0 1 2 3 4 5 6 7
cache size : 20480 KB
```

```
From /proc/meminfo
MemTotal:      529226408 kB
HugePages_Total:    0
Hugepagesize:     2048 kB
```

```
/usr/bin/lsb_release -d
Red Hat Enterprise Linux Server release 6.5 (Santiago)
```

```
From /etc/*release* /etc/*version*
redhat-release: Red Hat Enterprise Linux Server release 6.5 (Santiago)
system-release: Red Hat Enterprise Linux Server release 6.5 (Santiago)
system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server
```

```
uname -a:
Linux 2485-65 2.6.32-431.el6.x86_64 #1 SMP Sun Nov 10 22:19:54 EST 2013
x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 Jun 20 03:54
```

```
SPEC is set to: /spec
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda2        ext4  962G  12G  902G   2% /spec
```

Additional information from dmidecode:

```
BIOS Insyde Corp. RMIBV629 05/12/2014
Memory:
30x Hynix HMT42GR7AFR4C-PB 16 GB 1600 MHz 2 rank
2x Hynix HMT42GR7MFR4C-PB 16 GB 1600 MHz 2 rank
16x NO DIMM NO DIMM
```

(End of data from sysinfo program)

Regarding the sysinfo display about the memory installed, the correct amount of memory is 512 GB and the dmidecode description should have two lines reading as:

```
30x Hynix HMT42GR7AFR4C-PB 16 GB 1333 MHz 2 rank
2x Hynix HMT42GR7AFR4C-PB 16 GB 1333 MHz 2 rank
```

## General Notes

Environment variables set by runspec before the start of the run:  
LD\_LIBRARY\_PATH = "/spec/libs/32:/spec/libs/64:/spec/sh"

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

Huawei RH2485 v2 (Intel Xeon E5-4620 v2)

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

**SPECint\_rate2006 = 1260**

**SPECint\_rate\_base2006 = 1210**

Test date: Jun-2014

Hardware Availability: Feb-2014

Software Availability: Nov-2013

## General Notes (Continued)

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB memory using RedHat EL 6.4

Transparent Huge Pages enabled with:

```
echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled
```

Filesystem page cache cleared with:

```
echo 1> /proc/sys/vm/drop_caches
```

runspec command invoked through numactl i.e.:

```
numactl --interleave=all runspec <etc>
```

## Base Compiler Invocation

C benchmarks:

```
icc -m32
```

C++ benchmarks:

```
icpc -m32
```

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_LINUX\_IA32

462.libquantum: -DSPEC\_CPU\_LINUX

483.xalancbmk: -DSPEC\_CPU\_LINUX

## Base Optimization Flags

C benchmarks:

```
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3
```

C++ benchmarks:

```
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3  
-Wl,-z,muldefs -L/sh -lsmartheap
```

## Base Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

## Peak Compiler Invocation

C benchmarks (except as noted below):

```
icc -m32
```

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

**SPECint\_rate2006 = 1260**

Huawei RH2485 v2 (Intel Xeon E5-4620 v2)

**SPECint\_rate\_base2006 = 1210**

CPU2006 license: 3175

Test date: Jun-2014

Test sponsor: Huawei

Hardware Availability: Feb-2014

Tested by: Huawei

Software Availability: Nov-2013

## Peak Compiler Invocation (Continued)

400.perlbench: icc -m64

401.bzip2: icc -m64

456.hmmer: icc -m64

458.sjeng: icc -m64

C++ benchmarks:

icpc -m32

## Peak Portability Flags

400.perlbench: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX\_X64

401.bzip2: -DSPEC\_CPU\_LP64

456.hmmer: -DSPEC\_CPU\_LP64

458.sjeng: -DSPEC\_CPU\_LP64

462.libquantum: -DSPEC\_CPU\_LINUX

483.xalancbmk: -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

400.perlbench: -xSSE4\_2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-auto-ilp32

401.bzip2: -xSSE4\_2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-opt-prefetch -auto-ilp32 -ansi-alias

403.gcc: basepeak = yes

429.mcf: basepeak = yes

445.gobmk: -xSSE4\_2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)  
-ansi-alias -opt-mem-layout-trans=3

456.hmmer: -xSSE4\_2 -ipo -O3 -no-prec-div -unroll12 -auto-ilp32

458.sjeng: -xSSE4\_2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-unroll14 -auto-ilp32

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

**SPECint\_rate2006 = 1260**

Huawei RH2485 v2 (Intel Xeon E5-4620 v2)

**SPECint\_rate\_base2006 = 1210**

**CPU2006 license:** 3175

**Test date:** Jun-2014

**Test sponsor:** Huawei

**Hardware Availability:** Feb-2014

**Tested by:** Huawei

**Software Availability:** Nov-2013

## Peak Optimization Flags (Continued)

462.libquantum: basepeak = yes

```
464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
              -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
              -unroll2 -ansi-alias
```

C++ benchmarks:

```
471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
              -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
              -ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs
              -L/sh -lsmartheap
```

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes

## Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=\_\_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.html>  
<http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-V1.0-IVB-RevG.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.xml>  
<http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-V1.0-IVB-RevG.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.

Report generated on Fri Jul 25 00:57:03 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 15 July 2014.