



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

(Test Sponsor: Intel Corporation)

ASUS F2A85-M PRO motherboard (AMD A10-6700 APU with Radeon HD Graphics)

SPECint®_rate2006 = 80.7

SPECint_rate_base2006 = 76.3

CPU2006 license: 13


Test sponsor: Intel Corporation

Tested by: Intel Corporation

Test date: Jan-2014

Hardware Availability: Aug-2013

Software Availability: Apr-2013

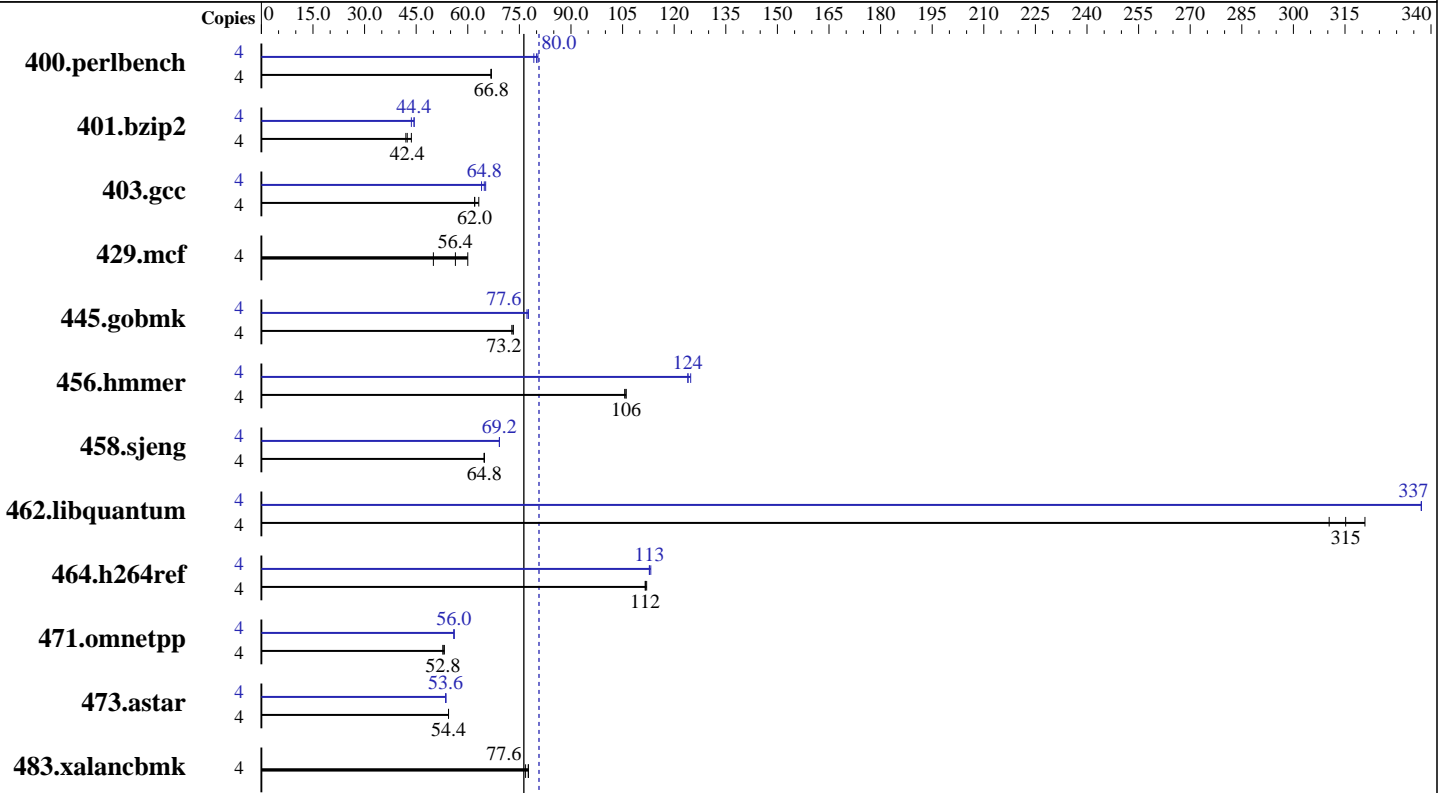

SPECint_rate_base2006 = 76.3
SPECint_rate2006 = 80.7

Hardware

CPU Name: AMD A10-6700
 CPU Characteristics: AMD Turbo CORE technology up to 4.30 GHz
 CPU MHz: 3700
 FPU: Integrated
 CPU(s) enabled: 4 cores, 1 chip, 4 cores/chip
 CPU(s) orderable: 1 chip
 Primary Cache: 128 KB I on chip per chip, 64 KB I shared / 2 cores; 16 KB D on chip per core
 Secondary Cache: 4 MB I+D on chip per chip, 2 MB shared / 2 cores
 L3 Cache: None
 Other Cache: None
 Memory: 4 GB (2 x 2 GB 1Rx8 PC3-12800U-11)
 Disk Subsystem: 250 GB Seagate SATA HDD, 7200 RPM
 Other Hardware: None

Software

Operating System: Microsoft Windows 7 Enterprise 6.1.7601 Service Pack 1 Build 7601
 Compiler: C/C++: Version 13.1.1.171 of Intel C++ Studio XE for Windows;
 Libraries: Version 16.00.30319.01 of Microsoft Visual Studio 2010 Professional SP1
 Auto Parallel: No
 File System: NTFS
 System State: Default
 Base Pointers: 32-bit
 Peak Pointers: 32/64-bit
 Other Software: SmartHeap Library Version 10.0 from <http://www.microquill.com/>



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

(Test Sponsor: Intel Corporation)

ASUS F2A85-M PRO motherboard (AMD A10-6700 APU with Radeon HD Graphics)

SPECint_rate2006 = 80.7

SPECint_rate_base2006 = 76.3

CPU2006 license: 13

Test sponsor: Intel Corporation

Tested by: Intel Corporation

Test date: Jan-2014

Hardware Availability: Aug-2013

Software Availability: Apr-2013

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	4	586	66.8	586	66.8	586	66.8	4	487	80.4	490	80.0	494	79.2
401.bzip2	4	889	43.6	909	42.4	916	42.0	4	884	43.6	870	44.4	866	44.4
403.gcc	4	519	62.0	511	63.2	519	62.0	4	493	65.2	497	64.8	503	64.0
429.mcf	4	647	56.4	730	50.0	610	60.0	4	647	56.4	730	50.0	610	60.0
445.gobmk	4	573	73.2	573	73.2	575	72.8	4	542	77.2	542	77.6	542	77.6
456.hammer	4	353	106	352	106	353	106	4	301	124	301	124	299	125
458.sjeng	4	746	64.8	746	64.8	746	64.8	4	699	69.2	698	69.2	701	69.2
462.libquantum	4	263	315	258	321	267	310	4	246	337	246	337	246	337
464.h264ref	4	793	112	792	112	792	112	4	784	113	783	113	785	113
471.omnetpp	4	472	52.8	471	53.2	472	52.8	4	445	56.0	448	56.0	446	56.0
473.astar	4	515	54.4	515	54.4	515	54.4	4	525	53.6	524	53.6	524	53.6
483.xalancbmk	4	360	76.8	356	77.6	355	77.6	4	360	76.8	356	77.6	355	77.6

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Invocation Notes

To compile these binaries, the Intel Compiler 13.1 was set up to generate 32-bit binaries with the command:
"ipsxe-comp-vars.bat ia32 vs2010" (shortcut provided in the Intel(r) Parallel Studio XE 2013 program folder)

Submit Notes

Processes were bound to specific processors using the start command with the /affinity switch. The config file option 'submit' was used to generate the affinity mask for each process.

Platform Notes

Sysinfo program C:\SPEC13.1\Docs\sysinfo
\$Rev: 6775 \$ \$Date:: 2011-08-16 #\$ \8787f7622badcf24e01c368b1db4377c
running on F2A85MPRO Sun Jan 19 05:04:30 2014

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

Trying 'systeminfo'
OS Name : Microsoft Windows 7 Enterprise
OS Version : 6.1.7601 Service Pack 1 Build 7601
System Manufacturer: System manufacturer
System Model : System Product Name
Processor(s) : 1 Processor(s) Installed.

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

(Test Sponsor: Intel Corporation)

ASUS F2A85-M PRO motherboard (AMD A10-6700 APU with Radeon HD Graphics)

SPECint_rate2006 = 80.7

SPECint_rate_base2006 = 76.3

CPU2006 license: 13

Test sponsor: Intel Corporation

Tested by: Intel Corporation

Test date: Jan-2014

Hardware Availability: Aug-2013

Software Availability: Apr-2013

Platform Notes (Continued)

[01]: AMD64 Family 21 Model 19 Stepping 1 AuthenticAMD ~3700 Mhz
BIOS Version : American Megatrends Inc. 6303, 8/13/2013
Total Physical Memory: 3,271 MB

Trying 'wmic cpu get /value'

DeviceID : CPU0

L2CacheSize : 4096

L3CacheSize : 0

MaxClockSpeed : 3700

Name : AMD A10-6700 APU with Radeon(tm) HD Graphics

NumberOfCores : 2

NumberOfLogicalProcessors: 4

(End of data from sysinfo program)

Component Notes

Tested systems can be used with Shin-G ATX case,
PC Power and Cooling 1200W power supply
Micron MT8JTF25664AZ-1G6 Series Memory DIMMs

General Notes

Binaries compiled on a system with 1x Intel Core i7-860 CPU
+ 8GB memory using Windows 7 Enterprise 64-bit

Base Compiler Invocation

C benchmarks:

icl -Qvc10 -Qstd=c99

C++ benchmarks:

icl -Qvc10

Base Portability Flags

403.gcc: -DSPEC_CPU_WIN32

464.h264ref: -DWIN32 -DSPEC_CPU_NO_INTTYPES

483.xalancbmk: -Qoption,cpp,--no_wchar_t_keyword

Base Optimization Flags

C benchmarks:

/arch:AVX -Qipo -O3 -Qprec-div- -Qopt-prefetch /F512000000

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

http://www.spec.org/

Page 3



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

(Test Sponsor: Intel Corporation)

ASUS F2A85-M PRO motherboard (AMD A10-6700 APU with Radeon HD Graphics)

SPECint_rate2006 = 80.7

SPECint_rate_base2006 = 76.3

CPU2006 license: 13

Test sponsor: Intel Corporation

Tested by: Intel Corporation

Test date: Jan-2014

Hardware Availability: Aug-2013

Software Availability: Apr-2013

Base Optimization Flags (Continued)

C++ benchmarks:

```
/arch:AVX -Qipo -O3 -Qprec-div- -Qopt-prefetch -Qcxx-features
/F512000000 shlw32M.lib -link /FORCE:MULTIPLE
```

Base Other Flags

C benchmarks:

```
403.gcc: -Dalloca=_alloca
```

Peak Compiler Invocation

C benchmarks (except as noted below):

```
icl -Qvc10 -Qstd=c99
```

```
456.hmmmer: C:\Program Files (x86)\Intel\Composer XE 2013.171\bin\intel64\icl.exe
```

```
458.sjeng: C:\Program Files (x86)\Intel\Composer XE 2013.171\bin\intel64\icl.exe
```

```
462.libquantum: C:\Program Files (x86)\Intel\Composer XE 2013.171\bin\intel64\icl.exe
-Qstd=c99
```

C++ benchmarks (except as noted below):

```
icl -Qvc10
```

```
473.astar: C:\Program Files (x86)\Intel\Composer XE 2013.171\bin\intel64\icl.exe
```

Peak Portability Flags

```
403.gcc: -DSPEC_CPU_WIN32
456.hmmmer: -DSPEC_CPU_P64
458.sjeng: -DSPEC_CPU_P64
462.libquantum: -DSPEC_CPU_P64
464.h264ref: -DWIN32 -DSPEC_CPU_NO_INTTYPES
473.astar: -DSPEC_CPU_P64
483.xalancbmk: -Qoption,cpp,--no_wchar_t_keyword
```

Peak Optimization Flags

C benchmarks:

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

(Test Sponsor: Intel Corporation)

ASUS F2A85-M PRO motherboard (AMD A10-6700 APU with Radeon HD Graphics)

SPECint_rate2006 = 80.7

SPECint_rate_base2006 = 76.3

CPU2006 license: 13

Test sponsor: Intel Corporation

Tested by: Intel Corporation

Test date: Jan-2014

Hardware Availability: Aug-2013

Software Availability: Apr-2013

Peak Optimization Flags (Continued)

400.perlbench: /arch:AVX(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
-Qipo -O3 -Qprec-div- -Qansi-alias -Qopt-prefetch
/F512000000 shlw32M.lib -link /FORCE:MULTIPLE

401.bzip2: /arch:AVX(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
-Qipo -O3 -Qprec-div- -Qopt-prefetch -Qansi-alias
/F512000000

403.gcc: /arch:AVX(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
-Qipo -O3 -Qprec-div- -Qopt-prefetch /F512000000

429.mcf: basepeak = yes

445.gobmk: /arch:AVX(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
-Qipo -O2 -Qprec-div- -Qansi-alias /F512000000

456.hmmer: -Qauto-ilp32 /arch:AVX(pass 2) -Qprof_gen(pass 1)
-Qprof_use(pass 2) -Qipo -O3 -Qprec-div- -Qopt-prefetch
/F512000000

458.sjeng: -Qauto-ilp32 /arch:AVX(pass 2) -Qprof_gen(pass 1)
-Qprof_use(pass 2) -Qipo -O3 -Qprec-div- -Qunroll4
/F512000000

462.libquantum: -Qauto-ilp32 /arch:AVX -Qipo -O3 -Qprec-div-
-Qopt-prefetch /F512000000

464.h264ref: /arch:AVX(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
-Qipo -O3 -Qprec-div- -Qunroll2 -Qansi-alias /F512000000

C++ benchmarks:

471.omnetpp: /arch:AVX(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
-Qipo -O3 -Qprec-div- -Qansi-alias
-Qopt-ra-region-strategy=block /F512000000 shlw32M.lib
-link /FORCE:MULTIPLE

473.astar: -Qauto-ilp32 /arch:AVX -Qipo -O3 -Qprec-div-
-Qopt-prefetch /F512000000 shlw64M.lib
-link /FORCE:MULTIPLE

483.xalancbmk: basepeak = yes

Peak Other Flags

C benchmarks:

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

(Test Sponsor: Intel Corporation)

ASUS F2A85-M PRO motherboard (AMD A10-6700 APU with Radeon HD Graphics)

SPECint_rate2006 = 80.7

SPECint_rate_base2006 = 76.3

CPU2006 license: 13

Test sponsor: Intel Corporation

Tested by: Intel Corporation

Test date: Jan-2014

Hardware Availability: Aug-2013

Software Availability: Apr-2013

Peak Other Flags (Continued)

403.gcc: -Dalloca=_alloca

456.hmmr: -link -LIBPATH:C:\Program Files (x86)\Intel\Composer XE 2013.171/compiler/lib/intel64
-link -LIBPATH:C:/Program Files (x86)/Microsoft Visual Studio 10.0/VC/lib/AMD64
-link -LIBPATH:C:/Program Files (x86)/Microsoft Visual Studio 10.0/VC/lib
-link -LIBPATH:C:/Program Files (x86)/Microsoft SDKs/Windows/v7.0A/lib/x64

458.sjeng: -link -LIBPATH:C:\Program Files (x86)\Intel\Composer XE 2013.171/compiler/lib/intel64
-link -LIBPATH:C:/Program Files (x86)/Microsoft Visual Studio 10.0/VC/lib/AMD64
-link -LIBPATH:C:/Program Files (x86)/Microsoft Visual Studio 10.0/VC/lib
-link -LIBPATH:C:/Program Files (x86)/Microsoft SDKs/Windows/v7.0A/lib/x64

462.libquantum: -link -LIBPATH:C:\Program Files (x86)\Intel\Composer XE 2013.171/compiler/lib/intel64
-link -LIBPATH:C:/Program Files (x86)/Microsoft Visual Studio 10.0/VC/lib/AMD64
-link -LIBPATH:C:/Program Files (x86)/Microsoft Visual Studio 10.0/VC/lib
-link -LIBPATH:C:/Program Files (x86)/Microsoft SDKs/Windows/v7.0A/lib/x64

C++ benchmarks:

473.astar: -link -LIBPATH:C:\Program Files (x86)\Intel\Composer XE 2013.171/compiler/lib/intel64
-link -LIBPATH:C:/Program Files (x86)/Microsoft Visual Studio 10.0/VC/lib/AMD64
-link -LIBPATH:C:/Program Files (x86)/Microsoft Visual Studio 10.0/VC/lib
-link -LIBPATH:C:/Program Files (x86)/Microsoft SDKs/Windows/v7.0A/lib/x64

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic13.1-official-windows.20130924.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic13.1-official-windows.20130924.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Tue Aug 12 15:06:20 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 15 July 2014.