



# SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Intel Corporation

SPECfp®2006 = **55.1**

Intel DQ77MK motherboard (Intel Core i5-3330)

SPECfp\_base2006 = **53.6**

CPU2006 license: 13


Test date: Nov-2013

Test sponsor: Intel Corporation

Hardware Availability: Nov-2012

Tested by: Intel Corporation

Software Availability: Apr-2013

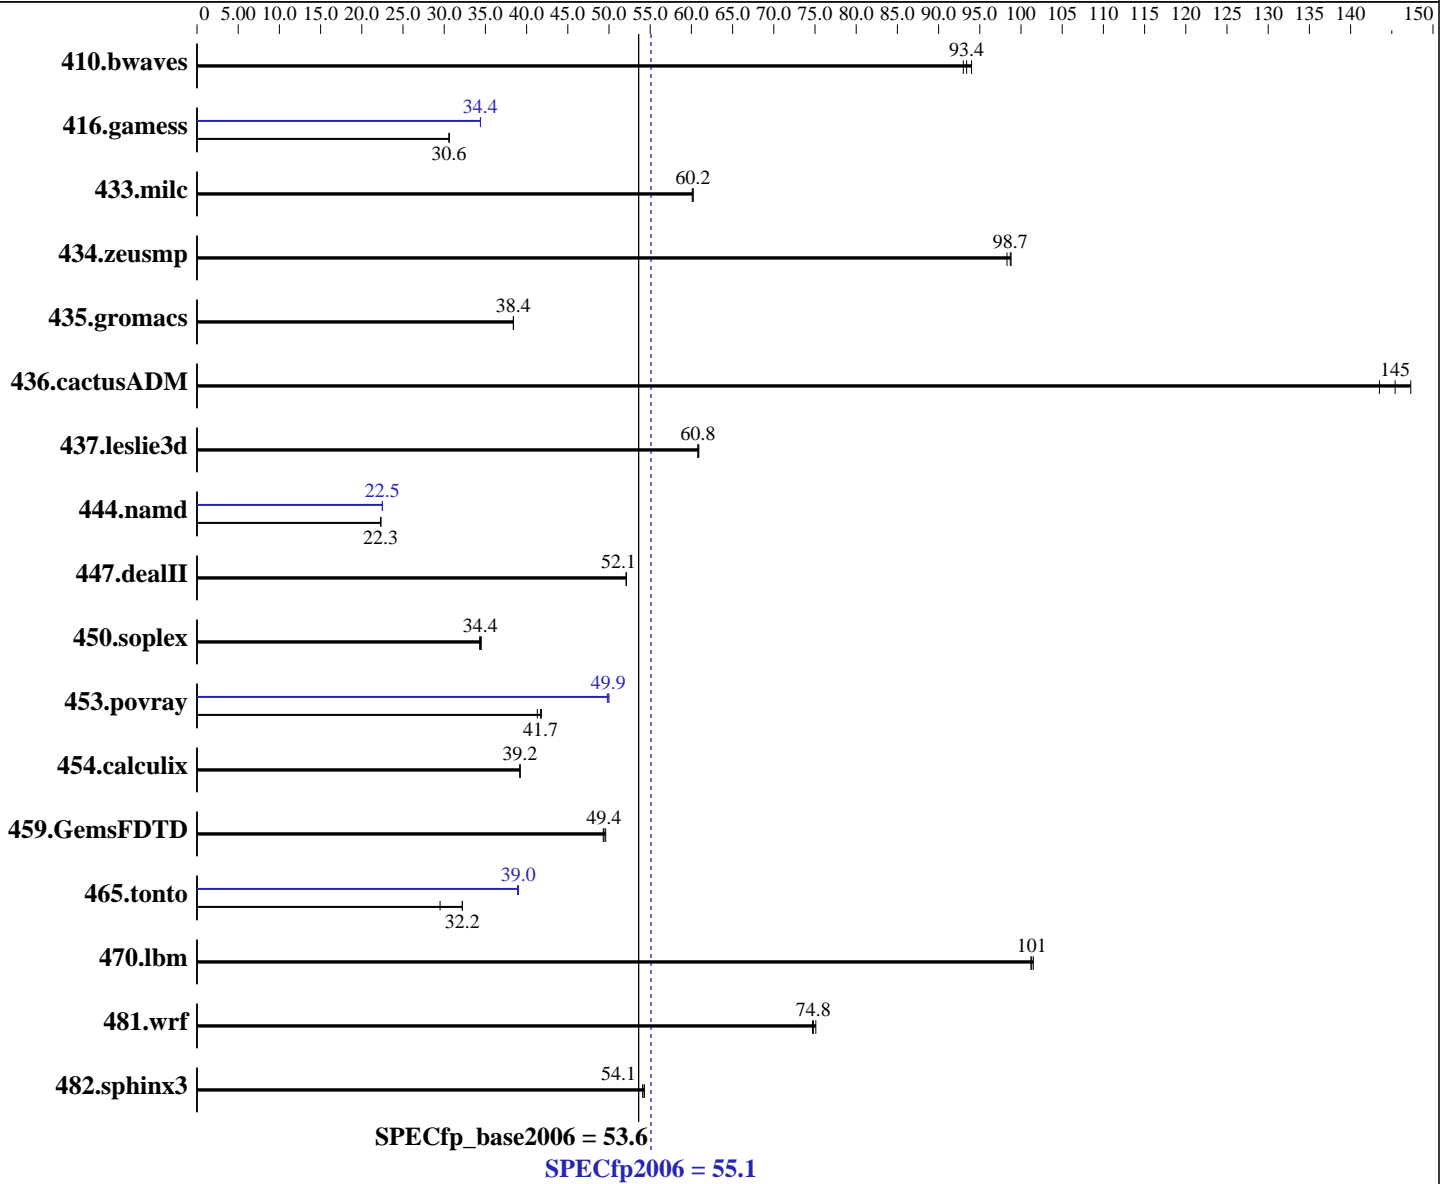

**Hardware**

CPU Name: Intel Core i5-3330  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.20 GHz  
 CPU MHz: 3000  
 FPU: Integrated  
 CPU(s) enabled: 4 cores, 1 chip, 4 cores/chip  
 CPU(s) orderable: 1 chip  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core

*Continued on next page*

**Software**

Operating System: Microsoft Windows 7 Enterprise 6.1.7601 Service Pack 1 Build 7601  
 Compiler: C/C++: Version 13.1.1.171 of Intel C++ Studio XE for Windows;  
 Fortran: Version 13.1.1.171 of Intel Fortran Studio XE for Windows;  
 Libraries: Version 16.00.30319.01 of Microsoft Visual Studio 2010 Professional SP1  
 Auto Parallel: Yes

*Continued on next page*



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Intel Corporation

SPECfp2006 = **55.1**

Intel DQ77MK motherboard (Intel Core i5-3330)

SPECfp\_base2006 = **53.6**

CPU2006 license: 13

Test date: Nov-2013

Test sponsor: Intel Corporation

Hardware Availability: Nov-2012

Tested by: Intel Corporation

Software Availability: Apr-2013

L3 Cache: 6 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 4 GB (2 x 2 GB 1Rx8 PC3-12800U-11)  
 Disk Subsystem: 250 GB Seagate SATA HDD, 7200 RPM  
 Other Hardware: None

File System: NTFS  
 System State: Default  
 Base Pointers: 32/64-bit  
 Peak Pointers: 32/64-bit  
 Other Software: SmartHeap Library Version 10.0 from <http://www.microquill.com/>

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	145	94.0	146	93.0	<b>146</b>	<b>93.4</b>	145	94.0	146	93.0	<b>146</b>	<b>93.4</b>
416.gamess	640	30.6	639	30.6	<b>639</b>	<b>30.6</b>	<b>569</b>	<b>34.4</b>	569	34.4	570	34.4
433.milc	153	60.2	<b>153</b>	<b>60.2</b>	153	60.1	153	60.2	<b>153</b>	<b>60.2</b>	153	60.1
434.zeusmp	92.6	98.3	<b>92.2</b>	<b>98.7</b>	92.1	98.8	92.6	98.3	<b>92.2</b>	<b>98.7</b>	92.1	98.8
435.gromacs	<b>186</b>	<b>38.4</b>	186	38.4	186	38.4	<b>186</b>	<b>38.4</b>	186	38.4	186	38.4
436.cactusADM	81.1	147	83.3	144	<b>82.2</b>	<b>145</b>	81.1	147	83.3	144	<b>82.2</b>	<b>145</b>
437.leslie3d	155	60.8	<b>155</b>	<b>60.8</b>	154	60.9	155	60.8	<b>155</b>	<b>60.8</b>	154	60.9
444.namd	360	22.3	<b>360</b>	<b>22.3</b>	360	22.3	356	22.5	356	22.5	<b>356</b>	<b>22.5</b>
447.dealII	220	52.1	<b>220</b>	<b>52.1</b>	219	52.1	220	52.1	<b>220</b>	<b>52.1</b>	219	52.1
450.soplex	<b>242</b>	<b>34.4</b>	242	34.5	243	34.3	<b>242</b>	<b>34.4</b>	242	34.5	243	34.3
453.povray	<b>128</b>	<b>41.7</b>	129	41.3	127	41.8	107	50.0	107	49.8	<b>107</b>	<b>49.9</b>
454.calculix	210	39.2	<b>210</b>	<b>39.2</b>	211	39.2	210	39.2	<b>210</b>	<b>39.2</b>	211	39.2
459.GemsFDTD	<b>215</b>	<b>49.4</b>	214	49.6	215	49.3	<b>215</b>	<b>49.4</b>	214	49.6	215	49.3
465.tonto	306	32.2	334	29.5	<b>306</b>	<b>32.2</b>	<b>253</b>	<b>39.0</b>	253	38.9	253	39.0
470.lbm	136	101	135	102	<b>136</b>	<b>101</b>	136	101	135	102	<b>136</b>	<b>101</b>
481.wrf	150	74.7	<b>149</b>	<b>74.8</b>	149	75.1	150	74.7	<b>149</b>	<b>74.8</b>	149	75.1
482.sphinx3	359	54.3	<b>360</b>	<b>54.1</b>	360	54.1	359	54.3	<b>360</b>	<b>54.1</b>	360	54.1

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Compiler Invocation Notes

To compile these binaries, the Intel Compiler 13.1 was set up to generate 64-bit binaries with the command:  
 "ipsxe-comp-vars.bat intel64 vs2010" (shortcut provided in the Intel(r) Parallel Studio XE 2013 program folder)

## Platform Notes

Sysinfo program C:\SPEC13.1\Docs\sysinfo  
 \$Rev: 6775 \$ \$Date:: 2011-08-16 #\$ \8787f7622badcf24e01c368b1db4377c  
 running on Clt7054D2179849 Thu Nov 28 02:09:37 2013

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

SPECfp2006 = 55.1

Intel DQ77MK motherboard (Intel Core i5-3330)

SPECfp\_base2006 = 53.6

CPU2006 license: 13

Test date: Nov-2013

Test sponsor: Intel Corporation

Hardware Availability: Nov-2012

Tested by: Intel Corporation

Software Availability: Apr-2013

## Platform Notes (Continued)

<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

Trying 'systeminfo'

```

OS Name      : Microsoft Windows 7 Enterprise
OS Version   : 6.1.7601 Service Pack 1 Build 7601
System Manufacturer: INTEL_
System Model  : DQ77MK_
Processor(s) : 1 Processor(s) Installed.
               [01]: Intel64 Family 6 Model 58 Stepping 9 GenuineIntel ~3001 Mhz
BIOS Version : Intel Corp. MKQ7710H.86A.0054.2012.1120.1444, 11/20/2012
Total Physical Memory: 3,912 MB

```

Trying 'wmic cpu get /value'

```

DeviceID      : CPU0
L2CacheSize   : 1024
L3CacheSize   : 6144
MaxClockSpeed : 3001
Name          : Intel(R) Core(TM) i5-3330 CPU @ 3.00GHz
NumberOfCores : 4
NumberOfLogicalProcessors: 4

```

(End of data from sysinfo program)

BIOS: SATA mode set to RAID

Windows Disk Driver: Intel Rapid Storage Technology 12.5.0.1066

Windows Chipset Driver: Intel Chipset Driver 9.4.0.1027

## Component Notes

Tested systems can be used with Shin-G ATX case,  
 PC Power and Cooling 1200W power supply  
 Micron MT8JTF25664AZ-1G6 Series Memory DIMMs

## General Notes

OMP\_NUM\_THREADS set to number of processors cores  
 KMP\_AFFINITY set to granularity=fine,scatter  
 Binaries compiled on a system with 1x Intel Core i7-860 CPU  
 + 8GB memory using Windows 7 Enterprise 64-bit

## Base Compiler Invocation

C benchmarks:

icl -Qvc10 -Qstd=c99

C++ benchmarks:

icl -Qvc10

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

SPECfp2006 = 55.1

Intel DQ77MK motherboard (Intel Core i5-3330)

SPECfp\_base2006 = 53.6

CPU2006 license: 13

Test date: Nov-2013

Test sponsor: Intel Corporation

Hardware Availability: Nov-2012

Tested by: Intel Corporation

Software Availability: Apr-2013

## Base Compiler Invocation (Continued)

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

icl -Qvc10 -Qstd=c99 ifort

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_P64  
 416.gamess: -DSPEC\_CPU\_P64  
 433.milc: -DSPEC\_CPU\_P64  
 434.zeusmp: -DSPEC\_CPU\_P64  
 435.gromacs: -DSPEC\_CPU\_P64  
 436.cactusADM: -DSPEC\_CPU\_P64 -names:lowercase /assume:underscore  
 437.leslie3d: -DSPEC\_CPU\_P64  
 444.namd: -DSPEC\_CPU\_P64 /TP  
 447.dealII: -DSPEC\_CPU\_P64 -DDEAL\_II\_MEMBER\_VAR\_SPECIALIZATION\_BUG  
 -Qoption,cpp,--ms\_incompat\_treatment\_of\_commas\_in\_macros  
 450.soplex: -DSPEC\_CPU\_P64  
 453.povray: -DSPEC\_CPU\_P64 -DSPEC\_CPU\_NEED\_INVHYP -DNEED\_INVHYP  
 454.calculix: -DSPEC\_CPU\_P64 -DSPEC\_CPU\_NOZMODIFIER -names:lowercase  
 459.GemsFDTD: -DSPEC\_CPU\_P64  
 465.tonto: -DSPEC\_CPU\_P64  
 470.lbm: -DSPEC\_CPU\_P64  
 481.wrf: -DSPEC\_CPU\_P64 -DSPEC\_CPU\_WINDOWS\_ICL  
 482.sphinx3: -DSPEC\_CPU\_P64

## Base Optimization Flags

C benchmarks:

-QxAVX -Qipo -O3 -Qprec-div- -Qparallel -Qansi-alias -Qopt-prefetch  
-Qauto-ilp32 /F1000000000

C++ benchmarks:

-QxAVX -Qipo -O3 -Qprec-div- -Qparallel -Qansi-alias -Qopt-prefetch  
-Qcxx-features -Qauto-ilp32 /F1000000000 shlw64M.lib  
-link /FORCE:MULTIPLE

Fortran benchmarks:

-QxAVX -Qipo -O3 -Qprec-div- -Qparallel -Qansi-alias -Qopt-prefetch  
/F1000000000

Benchmarks using both Fortran and C:

-QxAVX -Qipo -O3 -Qprec-div- -Qparallel -Qansi-alias -Qopt-prefetch  
-Qauto-ilp32 /F1000000000



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

SPECfp2006 = 55.1

Intel DQ77MK motherboard (Intel Core i5-3330)

SPECfp\_base2006 = 53.6

CPU2006 license: 13

Test date: Nov-2013

Test sponsor: Intel Corporation

Hardware Availability: Nov-2012

Tested by: Intel Corporation

Software Availability: Apr-2013

## Peak Compiler Invocation

C benchmarks:

icl -Qvc10 -Qstd=c99

C++ benchmarks:

icl -Qvc10

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

icl -Qvc10 -Qstd=c99 ifort

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

444.namd: -QxAVX(pass 2) -Qprof\_gen(pass 1) -Qprof\_use(pass 2) -Qipo  
-O3 -Qprec-div- -Oa -Qauto-ilp32 /F1000000000 sh1W64M.lib  
-link /FORCE:MULTIPLE

447.dealII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -QxAVX(pass 2) -Qprof\_gen(pass 1) -Qprof\_use(pass 2) -Qipo  
-O3 -Qprec-div- -Qunroll4 -Qansi-alias -Qauto-ilp32  
/F1000000000 sh1W64M.lib -link /FORCE:MULTIPLE

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -QxAVX(pass 2) -Qprof\_gen(pass 1) -Qprof\_use(pass 2) -Qipo  
-O3 -Qprec-div- -Qunroll2 -Ob0 -Qansi-alias -Qscalar-rep-  
/F1000000000

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

SPECfp2006 = 55.1

Intel DQ77MK motherboard (Intel Core i5-3330)

SPECfp\_base2006 = 53.6

CPU2006 license: 13

Test date: Nov-2013

Test sponsor: Intel Corporation

Hardware Availability: Nov-2012

Tested by: Intel Corporation

Software Availability: Apr-2013

## Peak Optimization Flags (Continued)

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: basepeak = yes

465.tonto: -QxAVX(pass 2) -Qprof\_gen(pass 1) -Qprof\_use(pass 2) -Qipo  
-O3 -Qprec-div- -Qunroll4 -Qauto -Qinline-calloc  
/F1000000000

Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: basepeak = yes

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic13.1-official-windows.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic13.1-official-windows.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Tue Sep 9 10:56:01 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 15 July 2014.