



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Intel Corporation

**SPECint®2006 = 37.9**

Intel DQ87PG motherboard (Intel Pentium G3220T)

**SPECint\_base2006 = 36.3**

CPU2006 license: 13


Test date: Nov-2013

Test sponsor: Intel Corporation

Hardware Availability: Sep-2013

Tested by: Intel Corporation

Software Availability: Apr-2013

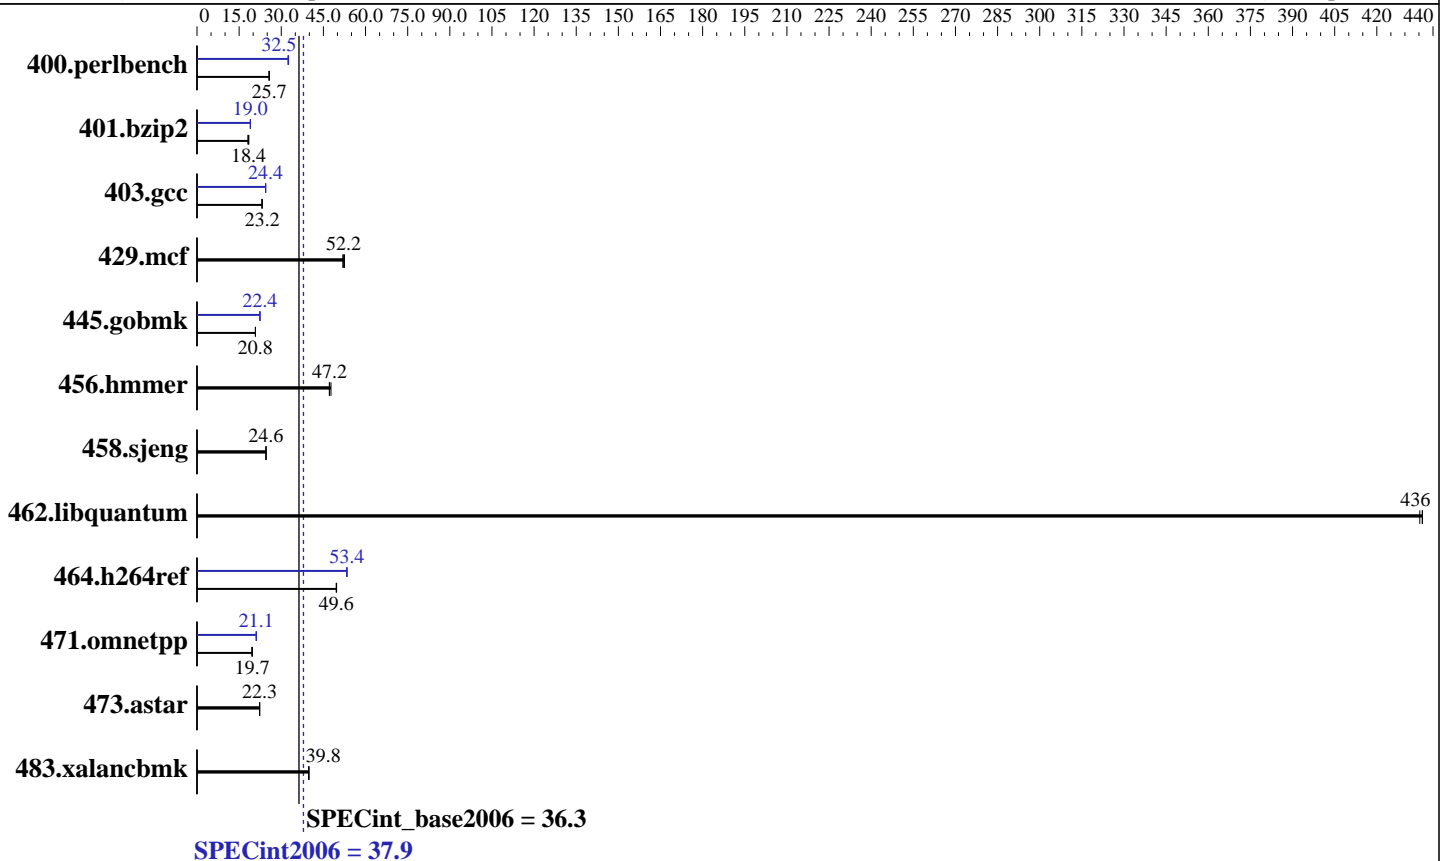

### Hardware

CPU Name: Intel Pentium G3220T  
 CPU Characteristics:  
 CPU MHz: 2600  
 FPU: Integrated  
 CPU(s) enabled: 2 cores, 1 chip, 2 cores/chip  
 CPU(s) orderable: 1 chip  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core  
 L3 Cache: 3 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 4 GB (2 x 2 GB 1Rx8 PC3-12800U-11, running at 1333 MHz and CL9)  
 Disk Subsystem: 250 GB Seagate SATA HDD, 7200 RPM  
 Other Hardware: None

### Software

Operating System: Microsoft Windows 7 Enterprise 6.1.7601 Service Pack 1 Build 7601  
 Compiler: C/C++: Version 13.1.1.171 of Intel C++ Studio XE for Windows;  
 Libraries: Version 16.00.30319.01 of Microsoft Visual Studio 2010 Professional SP1  
 Auto Parallel: Yes  
 File System: NTFS  
 System State: Default  
 Base Pointers: 32/64-bit  
 Peak Pointers: 32/64-bit  
 Other Software: SmartHeap Library Version 10.0 from <http://www.microquill.com/>



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

SPECint2006 = 37.9

Intel DQ87PG motherboard (Intel Pentium G3220T)

SPECint\_base2006 = 36.3

CPU2006 license: 13

Test date: Nov-2013

Test sponsor: Intel Corporation

Hardware Availability: Sep-2013

Tested by: Intel Corporation

Software Availability: Apr-2013

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	379	25.8	381	25.6	<b>380</b>	<b>25.7</b>	<b>301</b>	<b>32.5</b>	300	32.6	302	32.4
401.bzip2	534	18.1	524	18.4	<b>524</b>	<b>18.4</b>	508	19.0	<b>508</b>	<b>19.0</b>	507	19.0
403.gcc	<b>348</b>	<b>23.2</b>	348	23.1	348	23.2	329	24.5	330	24.4	<b>330</b>	<b>24.4</b>
429.mcf	174	52.5	<b>175</b>	<b>52.2</b>	176	51.9	174	52.5	<b>175</b>	<b>52.2</b>	176	51.9
445.gobmk	<b>504</b>	<b>20.8</b>	504	20.8	505	20.8	469	22.4	<b>468</b>	<b>22.4</b>	468	22.4
456.hammer	<b>198</b>	<b>47.2</b>	198	47.1	196	47.7	<b>198</b>	<b>47.2</b>	198	47.1	196	47.7
458.sjeng	494	24.5	492	24.6	<b>492</b>	<b>24.6</b>	494	24.5	492	24.6	<b>492</b>	<b>24.6</b>
462.libquantum	47.5	436	47.6	435	<b>47.5</b>	<b>436</b>	47.5	436	47.6	435	<b>47.5</b>	<b>436</b>
464.h264ref	<b>446</b>	<b>49.6</b>	446	49.6	446	49.7	414	53.4	<b>415</b>	<b>53.4</b>	415	53.3
471.omnetpp	320	19.5	317	19.7	<b>317</b>	<b>19.7</b>	<b>296</b>	<b>21.1</b>	297	21.1	296	21.1
473.astar	<b>315</b>	<b>22.3</b>	315	22.3	315	22.3	<b>315</b>	<b>22.3</b>	315	22.3	315	22.3
483.xalancbmk	<b>173</b>	<b>39.8</b>	173	39.9	174	39.7	<b>173</b>	<b>39.8</b>	173	39.9	174	39.7

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Compiler Invocation Notes

To compile these binaries, the Intel Compiler 13.1 was set up to generate 64-bit binaries with the command:  
"ipsxe-comp-vars.bat intel64 vs2010" (shortcut provided in the Intel(r) Parallel Studio XE 2013 program folder)

## Platform Notes

Sysinfo program C:\SPEC13.1\Docs\sysinfo  
\$Rev: 6775 \$ \$Date:: 2011-08-16 #\$ \8787f7622badcf24e01c368b1db4377c  
running on Clt00224D4FB715 Sat Nov 23 09:13:36 2013

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:  
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
Trying 'systeminfo'
OS Name       : Microsoft Windows 7 Enterprise
OS Version    : 6.1.7601 Service Pack 1 Build 7601
System Manufacturer: INTEL_
System Model   : DQ87PG__
Processor(s)  : 1 Processor(s) Installed.
               [01]: Intel64 Family 6 Model 60 Stepping 3 GenuineIntel ~2600 Mhz
BIOS Version  : Intel(R) Corp. PGQ8710H.86A.0036.2013.0702.1908, 7/2/2013
Total Physical Memory: 3,749 MB
```

```
Trying 'wmic cpu get /value'
DeviceID      : CPU0
```

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

SPECint2006 = 37.9

Intel DQ87PG motherboard (Intel Pentium G3220T)

SPECint\_base2006 = 36.3

CPU2006 license: 13

Test date: Nov-2013

Test sponsor: Intel Corporation

Hardware Availability: Sep-2013

Tested by: Intel Corporation

Software Availability: Apr-2013

## Platform Notes (Continued)

```

L2CacheSize      : 512
L3CacheSize      : 3072
MaxClockSpeed    : 2600
Name              : Intel(R) Pentium(R) CPU G3220T @ 2.60GHz
NumberOfCores    : 2
NumberOfLogicalProcessors: 2

```

(End of data from sysinfo program)

BIOS: SATA mode set to RAID

Windows Disk Driver: Intel Rapid Storage Technology 12.5.0.1066

Windows Chipset Driver: Intel Chipset Driver 9.4.0.1027

## Component Notes

Tested systems can be used with Shin-G ATX case,  
PC Power and Cooling 1200W power supply  
Micron MT8JTF25664AZ-1G6 Series Memory DIMMs

## General Notes

OMP\_NUM\_THREADS set to number of processors cores  
KMP\_AFFINITY set to granularity=fine,scatter  
Binaries compiled on a system with 1x Intel Core i7-860 CPU  
+ 8GB memory using Windows 7 Enterprise 64-bit

## Base Compiler Invocation

C benchmarks:

```
icl -Qvc10 -Qstd=c99
```

C++ benchmarks:

```
icl -Qvc10
```

## Base Portability Flags

```

400.perlbench: -DSPEC_CPU_P64 -DSPEC_CPU_WIN64_X64
               -DSPEC_CPU_NO_NEED_VA_COPY
401.bzip2: -DSPEC_CPU_P64
403.gcc: -DSPEC_CPU_P64 -DSPEC_CPU_WIN64
429.mcf: -DSPEC_CPU_P64
445.gobmk: -DSPEC_CPU_P64
456.hmmer: -DSPEC_CPU_P64
458.sjeng: -DSPEC_CPU_P64
462.libquantum: -DSPEC_CPU_P64
464.h264ref: -DSPEC_CPU_P64 -DWIN32 -DSPEC_CPU_NO_INTTYPES

```

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

SPECint2006 = 37.9

Intel DQ87PG motherboard (Intel Pentium G3220T)

SPECint\_base2006 = 36.3

CPU2006 license: 13

Test date: Nov-2013

Test sponsor: Intel Corporation

Hardware Availability: Sep-2013

Tested by: Intel Corporation

Software Availability: Apr-2013

## Base Portability Flags (Continued)

471.omnetpp: -DSPEC\_CPU\_P64 -DSPEC\_CPU\_WIN64  
473.astar: -DSPEC\_CPU\_P64  
483.xalancbmk: -DSPEC\_CPU\_P64 -Qoption,cpp,--no\_wchar\_t\_keyword

## Base Optimization Flags

C benchmarks:  
-QxSSE4.2 -Qipo -O3 -Qprec-div- -Qopt-prefetch -Qparallel  
-Qauto-ilp32 /F512000000

C++ benchmarks:  
-QxSSE4.2 -Qipo -O3 -Qprec-div- -Qopt-prefetch -Qcxx-features  
-Qauto-ilp32 /F512000000 shlw64M.lib -link /FORCE:MULTIPLE

## Base Other Flags

C benchmarks:  
403.gcc: -Dalloca=\_alloca

## Peak Compiler Invocation

C benchmarks:  
icl -Qvc10 -Qstd=c99

C++ benchmarks:  
icl -Qvc10

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:  
400.perlbench: -QxSSE4.2(pass 2) -Qprof\_gen(pass 1) -Qprof\_use(pass 2)  
-Qipo -O3 -Qprec-div- -Qansi-alias -Qopt-prefetch  
-Qauto-ilp32 /F512000000 shlw64M.lib  
-link /FORCE:MULTIPLE

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

SPECint2006 = 37.9

Intel DQ87PG motherboard (Intel Pentium G3220T)

SPECint\_base2006 = 36.3

CPU2006 license: 13

Test date: Nov-2013

Test sponsor: Intel Corporation

Hardware Availability: Sep-2013

Tested by: Intel Corporation

Software Availability: Apr-2013

## Peak Optimization Flags (Continued)

401.bzip2: -QxSSE4.2(pass 2) -Qprof\_gen(pass 1) -Qprof\_use(pass 2)  
-Qipo -O3 -Qprec-div- -Qopt-prefetch -Qansi-alias  
-Qauto-ilp32 /F512000000

403.gcc: -QxSSE4.2(pass 2) -Qprof\_gen(pass 1) -Qprof\_use(pass 2)  
-Qipo -O3 -Qprec-div- -Qauto-ilp32 /F512000000

429.mcf: basepeak = yes

445.gobmk: -QxSSE4.2(pass 2) -Qprof\_gen(pass 1) -Qprof\_use(pass 2)  
-Qipo -O2 -Qprec-div- -Qansi-alias -Qauto-ilp32  
/F512000000

456.hmmr: basepeak = yes

458.sjeng: basepeak = yes

462.libquantum: basepeak = yes

464.h264ref: -QxSSE4.2(pass 2) -Qprof\_gen(pass 1) -Qprof\_use(pass 2)  
-Qipo -O3 -Qprec-div- -Qunroll2 -Qansi-alias  
-Qauto-ilp32 /F512000000

C++ benchmarks:

471.omnetpp: -QxSSE4.2(pass 2) -Qprof\_gen(pass 1) -Qprof\_use(pass 2)  
-Qipo -O3 -Qprec-div- -Qansi-alias  
-Qopt-ra-region-strategy=block -Qauto-ilp32 /F512000000  
shlW64M.lib -link /FORCE:MULTIPLE

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes

## Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic13.1-official-windows.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic13.1-official-windows.xml>



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

SPECint2006 = 37.9

Intel DQ87PG motherboard (Intel Pentium G3220T)

SPECint\_base2006 = 36.3

CPU2006 license: 13

Test date: Nov-2013

Test sponsor: Intel Corporation

Hardware Availability: Sep-2013

Tested by: Intel Corporation

Software Availability: Apr-2013

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Fri Jul 25 00:46:43 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 15 July 2014.