



# SPEC<sup>®</sup> CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## IBM Corporation


IBM System x3530 M4  
(Intel Xeon E5-2448L v2, 1.80 GHz)

SPECfp<sup>®</sup>2006 = **71.4**

SPECfp\_base2006 = **68.2**

CPU2006 license: 11  
Test sponsor: IBM Corporation  
Tested by: IBM Corporation

Test date: Jul-2014  
Hardware Availability: Mar-2014  
Software Availability: Nov-2013

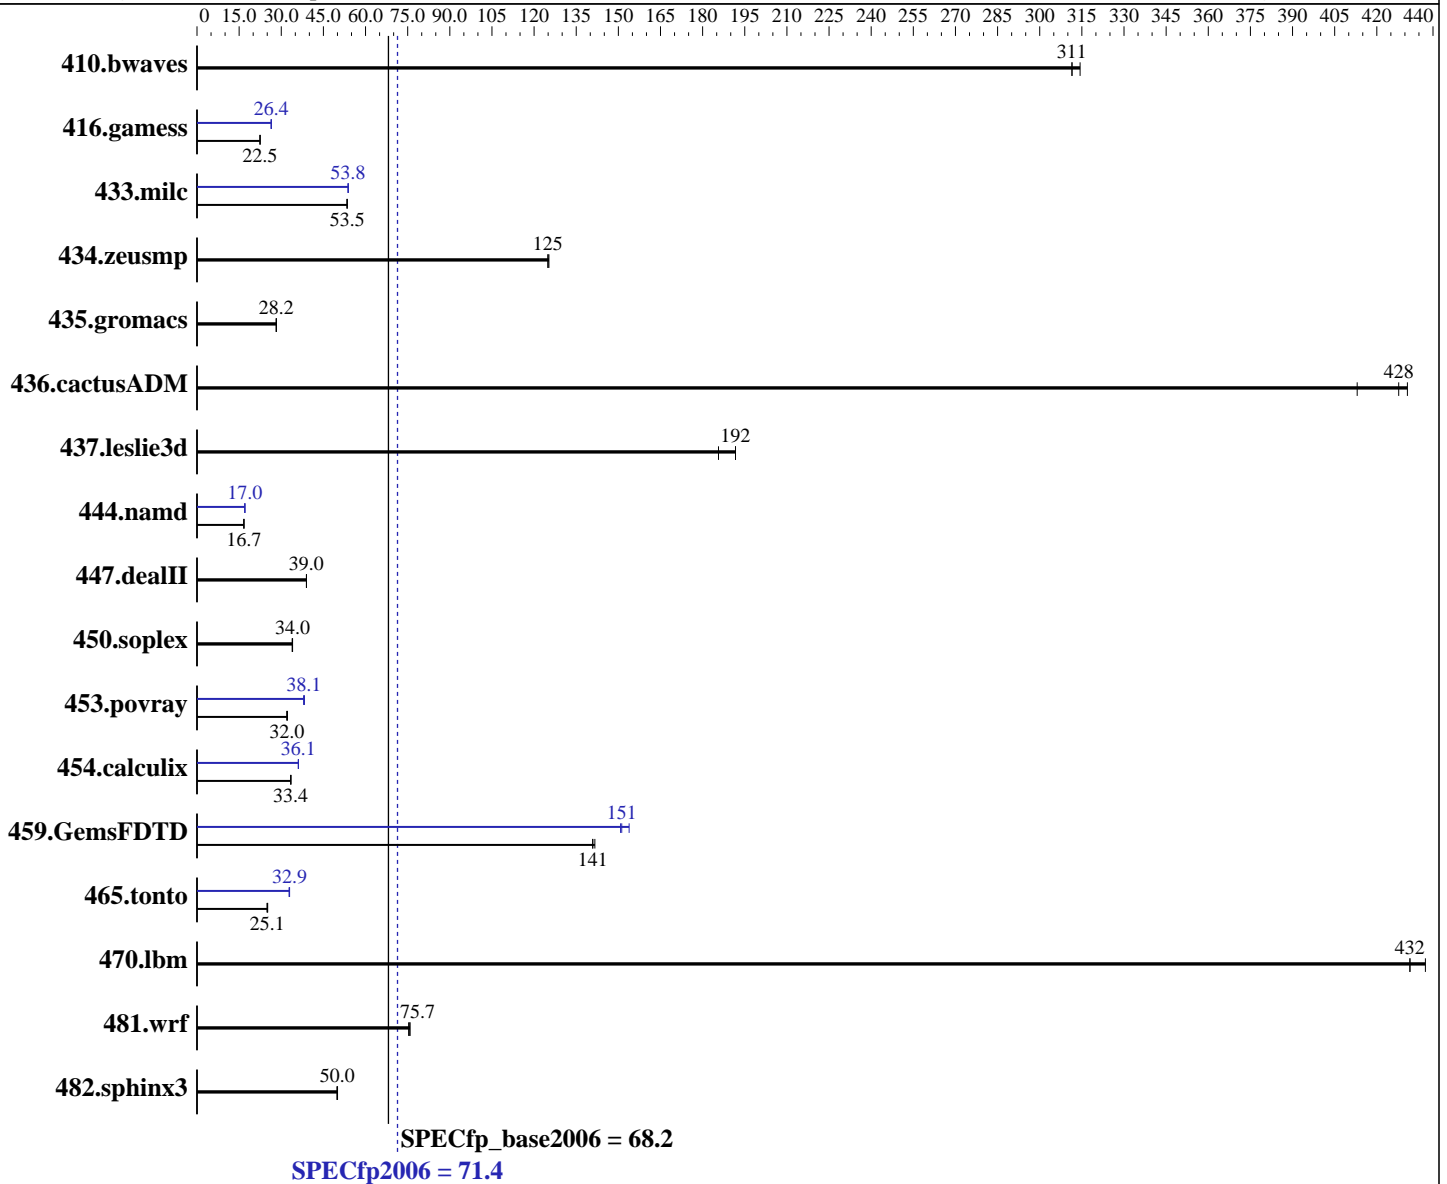

**Hardware**

CPU Name: Intel Xeon E5-2448L v2  
 CPU Characteristics: Intel Turbo Boost Technology up to 2.40 GHz  
 CPU MHz: 1800  
 FPU: Integrated  
 CPU(s) enabled: 20 cores, 2 chips, 10 cores/chip  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

**Software**

Operating System: Red Hat Enterprise Linux Server release 6.5 (Santiago)  
 2.6.32-431.el6.x86\_64  
 Compiler: C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux;  
 Fortran: Version 14.0.0.080 of Intel Fortran Studio XE for Linux  
 Auto Parallel: Yes  
 File System: ext4

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## IBM Corporation

IBM System x3530 M4  
(Intel Xeon E5-2448L v2, 1.80 GHz)

SPECfp2006 = **71.4**

SPECfp\_base2006 = **68.2**

CPU2006 license: 11  
Test sponsor: IBM Corporation  
Tested by: IBM Corporation

Test date: Jul-2014  
Hardware Availability: Mar-2014  
Software Availability: Nov-2013

L3 Cache: 25 MB I+D on chip per chip  
Other Cache: None  
Memory: 192 GB (12 x 16 GB 2Rx4 PC3-12800R-11, ECC)  
Disk Subsystem: 1 x 500 GB SATA, 7200 RPM  
Other Hardware: None

System State: Run level 3 (multi-user)  
Base Pointers: 64-bit  
Peak Pointers: 32/64-bit  
Other Software: None

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	43.6	311	43.2	314	<b>43.6</b>	<b>311</b>	43.6	311	43.2	314	<b>43.6</b>	<b>311</b>
416.gamess	<b>872</b>	<b>22.5</b>	873	22.4	872	22.5	740	26.4	<b>741</b>	<b>26.4</b>	741	26.4
433.milc	<b>172</b>	<b>53.5</b>	172	53.4	172	53.5	170	53.9	<b>171</b>	<b>53.8</b>	171	53.8
434.zeusmp	72.6	125	<b>72.8</b>	<b>125</b>	72.8	125	72.6	125	<b>72.8</b>	<b>125</b>	72.8	125
435.gromacs	253	28.2	253	28.2	<b>253</b>	<b>28.2</b>	253	28.2	253	28.2	<b>253</b>	<b>28.2</b>
436.cactusADM	27.7	431	28.9	413	<b>27.9</b>	<b>428</b>	27.7	431	28.9	413	<b>27.9</b>	<b>428</b>
437.leslie3d	50.6	186	49.0	192	<b>49.0</b>	<b>192</b>	50.6	186	49.0	192	<b>49.0</b>	<b>192</b>
444.namd	<b>480</b>	<b>16.7</b>	480	16.7	480	16.7	471	17.0	471	17.0	<b>471</b>	<b>17.0</b>
447.dealII	293	39.0	<b>294</b>	<b>39.0</b>	294	39.0	293	39.0	<b>294</b>	<b>39.0</b>	294	39.0
450.soplex	<b>245</b>	<b>34.0</b>	245	34.0	246	33.9	<b>245</b>	<b>34.0</b>	245	34.0	246	33.9
453.povray	166	32.0	165	32.2	<b>166</b>	<b>32.0</b>	139	38.2	140	38.0	<b>140</b>	<b>38.1</b>
454.calculix	<b>247</b>	<b>33.4</b>	247	33.4	247	33.4	<b>229</b>	<b>36.1</b>	229	36.1	228	36.1
459.GemsFDTD	75.3	141	<b>75.3</b>	<b>141</b>	74.9	142	70.4	151	69.0	154	<b>70.2</b>	<b>151</b>
465.tonto	395	24.9	<b>393</b>	<b>25.1</b>	391	25.2	300	32.8	<b>299</b>	<b>32.9</b>	299	32.9
470.lbm	<b>31.8</b>	<b>432</b>	31.8	432	31.4	437	<b>31.8</b>	<b>432</b>	31.8	432	31.4	437
481.wrf	148	75.3	147	75.8	<b>147</b>	<b>75.7</b>	148	75.3	147	75.8	<b>147</b>	<b>75.7</b>
482.sphinx3	391	49.8	<b>390</b>	<b>50.0</b>	390	50.0	391	49.8	<b>390</b>	<b>50.0</b>	390	50.0

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"  
Zone reclaim mode enabled with:  
echo 1 > /proc/sys/vm/zone\_reclaim\_mode  
Intel Idle Driver disabled with the following Linux kernel parameter in /etc/grub.conf:  
intel\_idle.max\_cstate=0

## Platform Notes

BIOS setting:  
Operating Mode set to Maximum Performance  
Hyper-Threading set to Disable  
Sysinfo program /home/SPECcpu-20140116-ic14.0/config/sysinfo.rev6818  
\$Rev: 6818 \$ \$Date:: 2012-07-17 #\$ e86d102572650a6e4d596a3cee98f191  
running on x3530M4 Tue Jul 1 20:52:28 2014

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## IBM Corporation

IBM System x3530 M4  
(Intel Xeon E5-2448L v2, 1.80 GHz)

SPECfp2006 = 71.4

SPECfp\_base2006 = 68.2

CPU2006 license: 11  
Test sponsor: IBM Corporation  
Tested by: IBM Corporation

Test date: Jul-2014  
Hardware Availability: Mar-2014  
Software Availability: Nov-2013

### Platform Notes (Continued)

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see: <http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E5-2448L v2 @ 1.80GHz
 2 "physical id"s (chips)
 20 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
  cpu cores : 10
  siblings  : 10
  physical 0: cores 0 1 2 3 4 8 9 10 11 12
  physical 1: cores 0 1 2 3 4 8 9 10 11 12
cache size : 25600 KB
```

```
From /proc/meminfo
MemTotal:      198318348 kB
HugePages_Total:      0
Hugepagesize:    2048 kB
```

```
/usr/bin/lsb_release -d
Red Hat Enterprise Linux Server release 6.5 (Santiago)
```

```
From /etc/*release* /etc/*version*
redhat-release: Red Hat Enterprise Linux Server release 6.5 (Santiago)
system-release: Red Hat Enterprise Linux Server release 6.5 (Santiago)
system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server
```

```
uname -a:
Linux x3530M4 2.6.32-431.el6.x86_64 #1 SMP Sun Nov 10 22:19:54 EST 2013
x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 Jul 1 13:36
```

```
SPEC is set to: /home/SPECcpu-20140116-ic14.0
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/mapper/vg_x3530m4-lv_home ext4  404G   48G  336G  13% /home
```

```
Additional information from dmidecode:
BIOS IBM  -[BEE136CUS-1.60]- 01/23/2014
Memory:
 12x Samsung M393B2G70QH0-YK0 16 GB 1600 MHz 2 rank
```

(End of data from sysinfo program)



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**IBM Corporation**

**SPECfp2006 = 71.4**

IBM System x3530 M4  
(Intel Xeon E5-2448L v2, 1.80 GHz)

**SPECfp\_base2006 = 68.2**

**CPU2006 license:** 11

**Test date:** Jul-2014

**Test sponsor:** IBM Corporation

**Hardware Availability:** Mar-2014

**Tested by:** IBM Corporation

**Software Availability:** Nov-2013

## General Notes

Environment variables set by runspec before the start of the run:

KMP\_AFFINITY = "granularity=fine,compact"

LD\_LIBRARY\_PATH = "/home/SPECcpu-20140116-ic14.0/libs/32:/home/SPECcpu-20140116-ic14.0/libs/64:/home/SPECcpu-20140116-ic14.0/sh"

OMP\_NUM\_THREADS = "20"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB memory using RedHat EL 6.4

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/redhat\_transparent\_hugepage/enabled

Filesystem page cache cleared with:

echo 1> /proc/sys/vm/drop\_caches

## Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.deallI: -DSPEC\_CPU\_LP64  
450.soplex: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
482.sphinx3: -DSPEC\_CPU\_LP64



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**IBM Corporation**

IBM System x3530 M4  
(Intel Xeon E5-2448L v2, 1.80 GHz)

**SPECfp2006 = 71.4**

**SPECfp\_base2006 = 68.2**

**CPU2006 license:** 11  
**Test sponsor:** IBM Corporation  
**Tested by:** IBM Corporation

**Test date:** Jul-2014  
**Hardware Availability:** Mar-2014  
**Software Availability:** Nov-2013

## Base Optimization Flags

C benchmarks:  
-xAVX -ipo -O3 -no-prec-div -parallel -opt-prefetch -ansi-alias

C++ benchmarks:  
-xAVX -ipo -O3 -no-prec-div -opt-prefetch -ansi-alias

Fortran benchmarks:  
-xAVX -ipo -O3 -no-prec-div -parallel -opt-prefetch

Benchmarks using both Fortran and C:  
-xAVX -ipo -O3 -no-prec-div -parallel -opt-prefetch -ansi-alias

## Peak Compiler Invocation

C benchmarks:  
icc -m64

C++ benchmarks:  
icpc -m64

Fortran benchmarks:  
ifort -m64

Benchmarks using both Fortran and C:  
icc -m64 ifort -m64

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

433.milc: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -auto-ilp32  
-ansi-alias

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**IBM Corporation**

**SPECfp2006 = 71.4**

IBM System x3530 M4  
(Intel Xeon E5-2448L v2, 1.80 GHz)

**SPECfp\_base2006 = 68.2**

**CPU2006 license:** 11

**Test date:** Jul-2014

**Test sponsor:** IBM Corporation

**Hardware Availability:** Mar-2014

**Tested by:** IBM Corporation

**Software Availability:** Nov-2013

## Peak Optimization Flags (Continued)

444.namd: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -fno-alias  
-auto-ilp32

447.dealIII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -ansi-alias

### Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2  
-inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2  
-inline-level=0 -opt-prefetch -parallel

465.tonto: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -inline-calloc  
-opt-malloc-options=3 -auto -unroll4

### Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

454.calculix: -xAVX -ipo -O3 -no-prec-div -auto-ilp32 -ansi-alias

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.html>

<http://www.spec.org/cpu2006/flags/IBM-Platform-Flags-V1.2-IVB-B.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.xml>

<http://www.spec.org/cpu2006/flags/IBM-Platform-Flags-V1.2-IVB-B.xml>



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## IBM Corporation

IBM System x3530 M4  
(Intel Xeon E5-2448L v2, 1.80 GHz)

**SPECfp2006 = 71.4**

**SPECfp\_base2006 = 68.2**

**CPU2006 license:** 11  
**Test sponsor:** IBM Corporation  
**Tested by:** IBM Corporation

**Test date:** Jul-2014  
**Hardware Availability:** Mar-2014  
**Software Availability:** Nov-2013

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Wed Jul 30 10:53:21 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 29 July 2014.