



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

IBM System x3850 X6
(Intel Xeon E7-4850 v2, 2.30 GHz)

SPECint_rate2006 = 1580

SPECint_rate_base2006 = 1530

CPU2006 license: 11


Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: Jul-2014

Hardware Availability: Mar-2014

Software Availability: Nov-2013

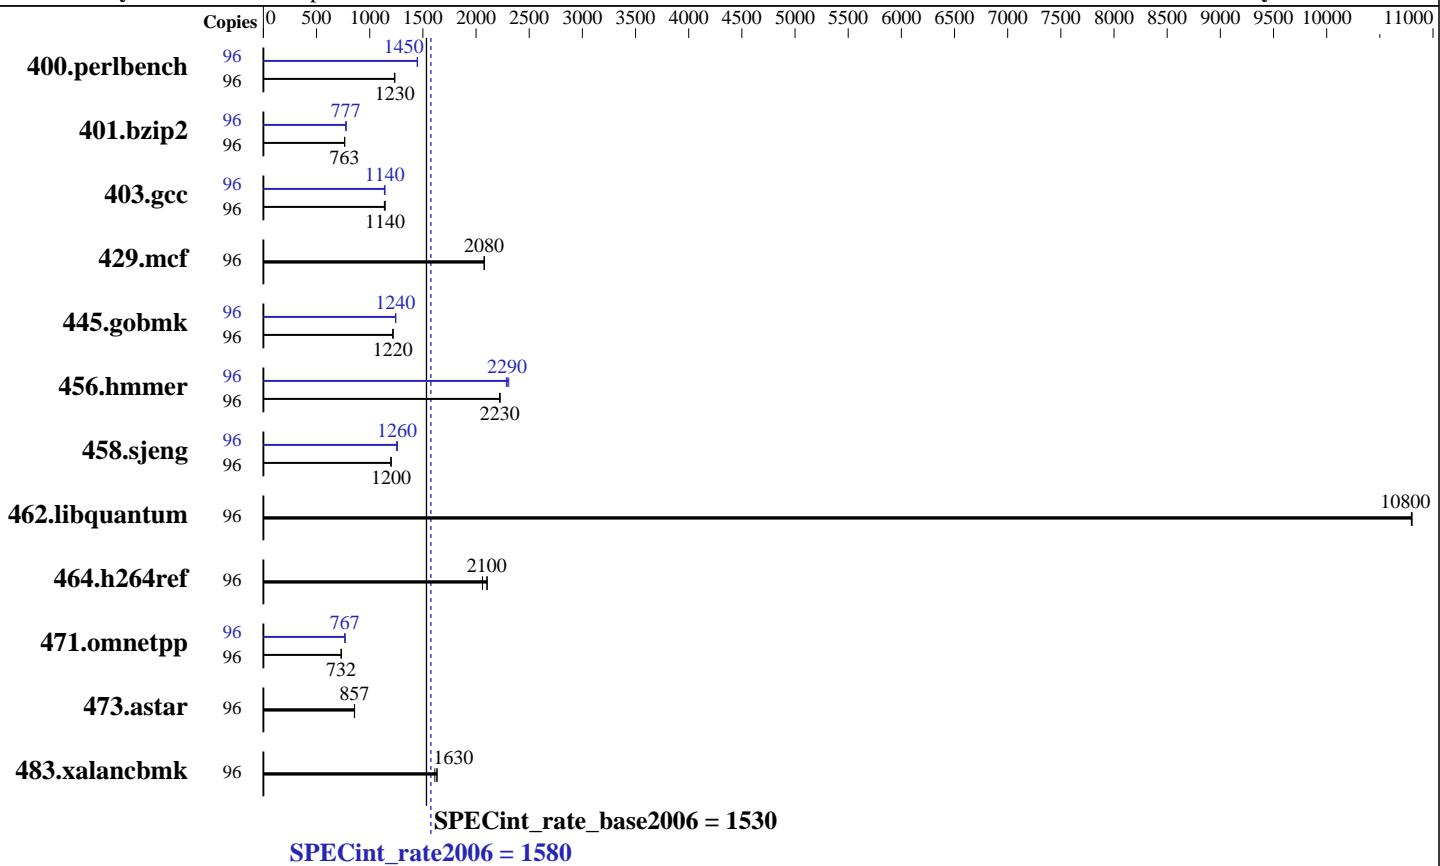

Hardware

CPU Name: Intel Xeon E7-4850 v2
CPU Characteristics: Intel Turbo Boost Technology up to 2.80 GHz
CPU MHz: 2300
FPU: Integrated
CPU(s) enabled: 48 cores, 4 chips, 12 cores/chip, 2 threads/core
CPU(s) orderable: 2,4 chips
Primary Cache: 32 KB I + 32 KB D on chip per core
Secondary Cache: 256 KB I+D on chip per core
L3 Cache: 24 MB I+D on chip per chip
Other Cache: None
Memory: 1 TB (64 x 16 GB 2Rx4 PC3L-12800R-11, ECC, running at 1067 MHz)
Disk Subsystem: 1 x 400 GB SATA, SSD
Other Hardware: None

Software

Operating System: Red Hat Enterprise Linux Server release 6.5 (Santiago)
Compiler: 2.6.32-431.el6.x86_64
Auto Parallel: C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux
File System: ext4
System State: Run level 3 (multi-user)
Base Pointers: 32-bit
Peak Pointers: 32/64-bit
Other Software: Microquill SmartHeap V10.0



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

IBM System x3850 X6
(Intel Xeon E7-4850 v2, 2.30 GHz)

SPECint_rate2006 = 1580

SPECint_rate_base2006 = 1530

CPU2006 license: 11

Test date: Jul-2014

Test sponsor: IBM Corporation

Hardware Availability: Mar-2014

Tested by: IBM Corporation

Software Availability: Nov-2013

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	96	760	1230	759	1240	761	1230	96	647	1450	647	1450	648	1450
401.bzip2	96	1210	765	1214	763	1214	763	96	1192	777	1194	776	1192	777
403.gcc	96	679	1140	675	1140	675	1140	96	679	1140	677	1140	676	1140
429.mcf	96	421	2080	422	2080	421	2080	96	421	2080	422	2080	421	2080
445.gobmk	96	827	1220	826	1220	827	1220	96	809	1240	810	1240	810	1240
456.hammer	96	403	2220	402	2230	403	2230	96	390	2290	388	2310	392	2280
458.sjeng	96	968	1200	967	1200	968	1200	96	923	1260	927	1250	922	1260
462.libquantum	96	184	10800	184	10800	184	10800	96	184	10800	184	10800	184	10800
464.h264ref	96	1011	2100	1009	2110	1031	2060	96	1011	2100	1009	2110	1031	2060
471.omnetpp	96	819	733	820	732	820	732	96	782	767	783	767	783	767
473.astar	96	786	858	786	857	787	856	96	786	858	786	857	787	856
483.xalancbmk	96	406	1630	406	1630	411	1610	96	406	1630	406	1630	411	1610

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

Operating Mode set to Maximum Performance in BIOS
Sysinfo program /cpu2006.1.2_14.0_aug2013/config/sysinfo.rev6818
\$Rev: 6818 \$ \$Date::: 2012-07-17 ## e86d102572650a6e4d596a3cee98f191
running on Larry-Andromeda Wed Jul 9 11:30:10 2014

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E7-4850 v2 @ 2.30GHz
        4 "physical id"s (chips)
        96 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
        cpu cores : 12
```

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

IBM System x3850 X6
(Intel Xeon E7-4850 v2, 2.30 GHz)

SPECint_rate2006 = 1580

SPECint_rate_base2006 = 1530

CPU2006 license: 11

Test date: Jul-2014

Test sponsor: IBM Corporation

Hardware Availability: Mar-2014

Tested by: IBM Corporation

Software Availability: Nov-2013

Platform Notes (Continued)

```
siblings : 24
physical 0: cores 0 1 2 3 4 5 8 9 10 11 12 13
physical 1: cores 0 1 2 3 4 5 8 9 10 11 12 13
physical 2: cores 0 1 2 3 4 5 8 9 10 11 12 13
physical 3: cores 0 1 2 3 4 5 8 9 10 11 12 13
cache size : 24576 KB

From /proc/meminfo
MemTotal:      1058470592 kB
HugePages_Total:      0
Hugepagesize:     2048 kB

/usr/bin/lsb_release -d
Red Hat Enterprise Linux Server release 6.5 (Santiago)

From /etc/*release* /etc/*version*
redhat-release: Red Hat Enterprise Linux Server release 6.5 (Santiago)
system-release: Red Hat Enterprise Linux Server release 6.5 (Santiago)
system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server

uname -a:
Linux Larry-Andromeda 2.6.32-431.el6.x86_64 #1 SMP Sun Nov 10 22:19:54 EST
2013 x86_64 x86_64 x86_64 GNU/Linux

run-level 3 Jul 9 11:26

SPEC is set to: /cpu2006.1.2_14.0_aug2013
Filesystem              Type  Size  Used Avail Use% Mounted on
/dev/mapper/vg_larryandromed-lv_root ext4  357G  233G  106G  69% /
Additional information from dmidecode:
BIOS IBM -[A8E107JUS-1.00]- 05/02/2014
Memory:
 32x NO DIMM Unknown
 64x Samsung M393B2G70QH0-YK0 16 GB 1067 MHz 2 rank

(End of data from sysinfo program)
```

General Notes

Environment variables set by runspec before the start of the run:

LD_LIBRARY_PATH = "/cpu2006.1.2_14.0_aug2013/libs/32:/cpu2006.1.2_14.0_aug2013/libs/64:/cpu2006.1.2_14.0_aug2013/sh"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB memory using RedHat EL 6.4

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled

Filesystem page cache cleared with:

echo 1> /proc/sys/vm/drop_caches

runspec command invoked through numactl i.e.:

numactl --interleave=all runspec <etc>



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

IBM System x3850 X6
(Intel Xeon E7-4850 v2, 2.30 GHz)

SPECint_rate2006 = 1580

SPECint_rate_base2006 = 1530

CPU2006 license: 11

Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: Jul-2014

Hardware Availability: Mar-2014

Software Availability: Nov-2013

Base Compiler Invocation

C benchmarks:

`icc -m32`

C++ benchmarks:

`icpc -m32`

Base Portability Flags

400.perlbench: `-DSPEC_CPU_LINUX_IA32`

462.libquantum: `-DSPEC_CPU_LINUX`

483.xalancbmk: `-DSPEC_CPU_LINUX`

Base Optimization Flags

C benchmarks:

`-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3`

C++ benchmarks:

`-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3 -Wl,-z,muldefs -L/sh -lsmartheap`

Base Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

Peak Compiler Invocation

C benchmarks (except as noted below):

`icc -m32`

400.perlbench: `icc -m64`

401.bzip2: `icc -m64`

456.hmmer: `icc -m64`

458.sjeng: `icc -m64`

C++ benchmarks:

`icpc -m32`



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

IBM System x3850 X6
(Intel Xeon E7-4850 v2, 2.30 GHz)

SPECint_rate2006 = 1580

SPECint_rate_base2006 = 1530

CPU2006 license: 11

Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: Jul-2014

Hardware Availability: Mar-2014

Software Availability: Nov-2013

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-auto-ilp32

401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-opt-prefetch -auto-ilp32 -ansi-alias

403.gcc: -xSSE4.2 -ipo -O3 -no-prec-div

429.mcf: basepeak = yes

445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)
-ansi-alias -opt-mem-layout-trans=3

456.hmmer: -xSSE4.2 -ipo -O3 -no-prec-div -unroll12 -auto-ilp32

458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-unroll14 -auto-ilp32

462.libquantum: basepeak = yes

464.h264ref: basepeak = yes

C++ benchmarks:

471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs
-L/sh -lsmartheap

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

IBM System x3850 X6
(Intel Xeon E7-4850 v2, 2.30 GHz)

SPECint_rate2006 = 1580

SPECint_rate_base2006 = 1530

CPU2006 license: 11

Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: Jul-2014

Hardware Availability: Mar-2014

Software Availability: Nov-2013

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.html>
<http://www.spec.org/cpu2006/flags/IBM-Platform-Flags-V1.2-IVB-A.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.xml>
<http://www.spec.org/cpu2006/flags/IBM-Platform-Flags-V1.2-IVB-A.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.

Report generated on Wed Jul 30 10:53:58 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 29 July 2014.