



SPEC[®] CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

(Test Sponsor: Intel Corporation)

ASUS F2A85-M PRO Motherboard (AMD A4-4000 APU with Radeon HD Graphics)

SPECfp[®]2006 = 23.6

SPECfp_base2006 = 22.9

CPU2006 license: 13


Test sponsor: Intel Corporation

Tested by: Intel Corporation

Test date: Jul-2014

Hardware Availability: Aug-2013

Software Availability: Oct-2013

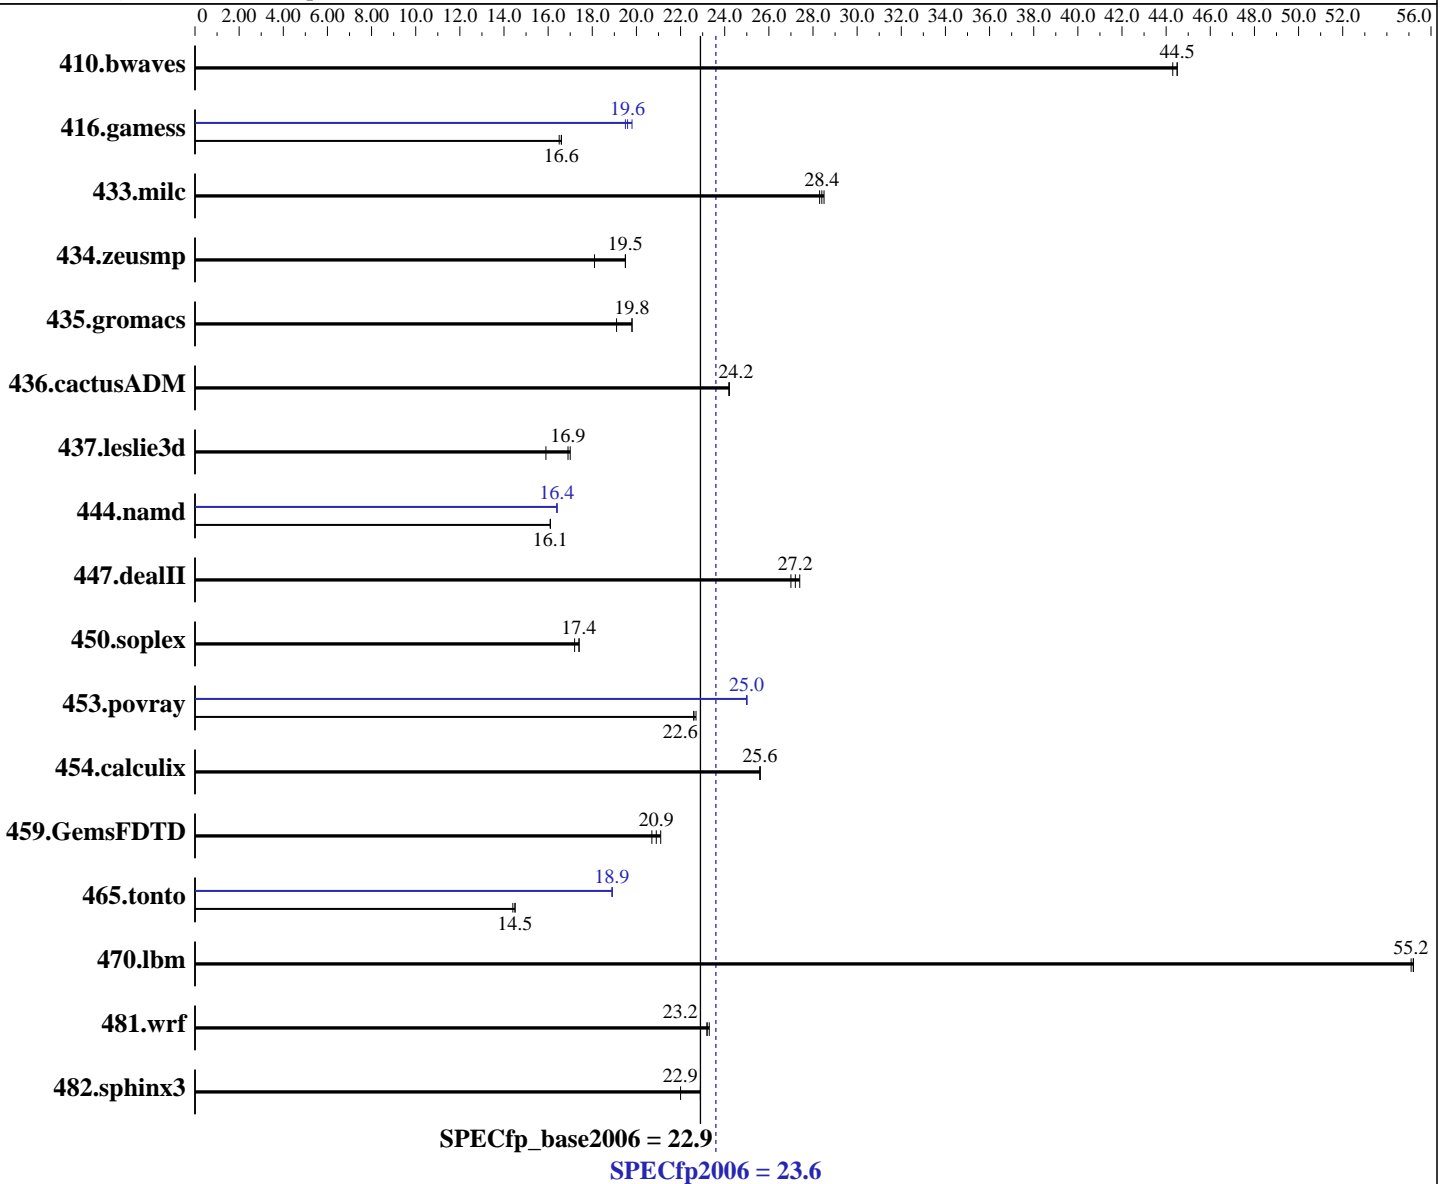

Hardware

CPU Name: AMD A4-4000
 CPU Characteristics: AMD Turbo CORE technology up to 3.20 GHz
 CPU MHz: 3000
 FPU: Integrated
 CPU(s) enabled: 2 cores, 1 chip, 2 cores/chip
 CPU(s) orderable: 1 chip
 Primary Cache: 64 KB I on chip per chip; 16 KB D on chip per core
 Secondary Cache: 1 MB I+D on chip per chip

Continued on next page

Software

Operating System: Microsoft Windows 8.1 Pro
 6.3.9600 N/A Build 9600
 Compiler: C/C++: Version 14.0.1.139 of Intel C++ Studio XE for Windows;
 Fortran: Version 14.0.1.139 of Intel Fortran Studio XE for Windows;
 Libraries: Version 16.00.30319.01 of Microsoft Visual Studio 2010 Professional SP1
 Auto Parallel: Yes

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

(Test Sponsor: Intel Corporation)

ASUS F2A85-M PRO Motherboard (AMD A4-4000 APU with Radeon HD Graphics)

SPECfp2006 = 23.6

SPECfp_base2006 = 22.9

CPU2006 license: 13

Test sponsor: Intel Corporation

Tested by: Intel Corporation

Test date: Jul-2014

Hardware Availability: Aug-2013

Software Availability: Oct-2013

L3 Cache: None
Other Cache: None
Memory: 8 GB (2 x 4 GB 2Rx4 PC3-12800U-11, running at 1333 MHz and CL9)
Disk Subsystem: 1 TB Seagate SATA HDD, 7200 RPM
Other Hardware: None

File System: NTFS
System State: Default
Base Pointers: 32/64-bit
Peak Pointers: 32/64-bit
Other Software: SmartHeap Library Version 10.0 from <http://www.microquill.com/>

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	307	44.3	305	44.5	305	44.5	307	44.3	305	44.5	305	44.5
416.gamess	1181	16.6	1187	16.5	1180	16.6	987	19.8	1002	19.5	997	19.6
433.milc	323	28.5	324	28.3	324	28.4	323	28.5	324	28.3	324	28.4
434.zeusmp	501	18.1	467	19.5	466	19.5	501	18.1	467	19.5	466	19.5
435.gromacs	374	19.1	361	19.8	361	19.8	374	19.1	361	19.8	361	19.8
436.cactusADM	493	24.2	493	24.2	494	24.2	493	24.2	493	24.2	494	24.2
437.leslie3d	592	15.9	554	17.0	557	16.9	592	15.9	554	17.0	557	16.9
444.namd	498	16.1	498	16.1	498	16.1	489	16.4	489	16.4	489	16.4
447.dealII	421	27.2	418	27.4	424	27.0	421	27.2	418	27.4	424	27.0
450.soplex	484	17.2	479	17.4	480	17.4	484	17.2	479	17.4	480	17.4
453.povray	235	22.6	236	22.6	234	22.7	213	25.0	213	25.0	213	25.0
454.calculix	322	25.6	322	25.6	322	25.6	322	25.6	322	25.6	322	25.6
459.GemsFDTD	514	20.7	508	20.9	503	21.1	514	20.7	508	20.9	503	21.1
465.tonto	681	14.5	680	14.5	683	14.4	522	18.9	521	18.9	520	18.9
470.lbm	249	55.2	249	55.2	249	55.1	249	55.2	249	55.2	249	55.1
481.wrf	482	23.2	479	23.3	481	23.2	482	23.2	479	23.3	481	23.2
482.sphinx3	885	22.0	850	22.9	850	22.9	885	22.0	850	22.9	850	22.9

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Invocation Notes

To compile these binaries, the Intel Compiler 14.0 was set up to generate 64-bit binaries with the command:
"ipsxe-comp-vars.bat intel64 vs2010" (shortcut provided in the Intel(r) Parallel Studio XE 2013 program folder)

Platform Notes

Sysinfo program C:\SPEC14.0\Docs\sysinfo
\$Rev: 6775 \$ \$Date:: 2011-08-16 #\$ \8787f7622badcf24e01c368b1db4377c
running on Clt08606E747443 Tue Jul 1 04:23:54 2014

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

(Test Sponsor: Intel Corporation)

ASUS F2A85-M PRO Motherboard (AMD A4-4000 APU with Radeon HD Graphics)

SPECfp2006 = 23.6

SPECfp_base2006 = 22.9

CPU2006 license: 13

Test sponsor: Intel Corporation

Tested by: Intel Corporation

Test date: Jul-2014

Hardware Availability: Aug-2013

Software Availability: Oct-2013

Platform Notes (Continued)

<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

Trying 'systeminfo'

```
OS Name       : Microsoft Windows 8.1 Pro
OS Version    : 6.3.9600 N/A Build 9600
System Manufacturer: System manufacturer
System Model   : System Product Name
Processor(s)  : 1 Processor(s) Installed.
               [01]: AMD64 Family 21 Model 19 Stepping 1 AuthenticAMD ~3000 Mhz
BIOS Version  : American Megatrends Inc. 6303, 8/13/2013
Total Physical Memory: 7,366 MB
```

Trying 'wmic cpu get /value'

```
DeviceID      : CPU0
L2CacheSize   : 1024
L3CacheSize   : 0
MaxClockSpeed : 3000
Name          : AMD A4-4000 APU with Radeon(tm) HD Graphics
NumberOfCores : 1
NumberOfLogicalProcessors: 2
```

(End of data from sysinfo program)

Component Notes

Tested systems can be used with Shin-G ATX case,
PC Power and Cooling 1200W power supply

General Notes

OMP_NUM_THREADS set to number of processors cores
KMP_AFFINITY set to granularity=fine,scatter
Binaries compiled on a system with 1x Intel Core i7-860 CPU
+ 8GB memory using Windows 7 Enterprise 64-bit

Base Compiler Invocation

C benchmarks:

```
icl -Qvc10 -Qstd=c99
```

C++ benchmarks:

```
icl -Qvc10
```

Fortran benchmarks:

```
ifort
```

Benchmarks using both Fortran and C:

```
icl -Qvc10 -Qstd=c99 ifort
```



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

(Test Sponsor: Intel Corporation)

ASUS F2A85-M PRO Motherboard (AMD A4-4000 APU with Radeon HD Graphics)

SPECfp2006 = 23.6

SPECfp_base2006 = 22.9

CPU2006 license: 13

Test sponsor: Intel Corporation

Tested by: Intel Corporation

Test date: Jul-2014

Hardware Availability: Aug-2013

Software Availability: Oct-2013

Base Portability Flags

```

410.bwaves: -DSPEC_CPU_P64
416.gamess: -DSPEC_CPU_P64
433.milc: -DSPEC_CPU_P64
434.zeusmp: -DSPEC_CPU_P64
435.gromacs: -DSPEC_CPU_P64
436.cactusADM: -DSPEC_CPU_P64 -names:lowercase /assume:underscore
437.leslie3d: -DSPEC_CPU_P64
444.namd: -DSPEC_CPU_P64 /TP
447.dealII: -DSPEC_CPU_P64 -DDEAL_II_MEMBER_VAR_SPECIALIZATION_BUG
-Qoption,cpp,--ms_incompat_treatment_of_commas_in_macros
450.soplex: -DSPEC_CPU_P64
453.povray: -DSPEC_CPU_P64 -DSPEC_CPU_NEED_INVHYP -DNEED_INVHYP
454.calculix: -DSPEC_CPU_P64 -DSPEC_CPU_NOZMODIFIER -names:lowercase
459.GemsFDTD: -DSPEC_CPU_P64
465.tonto: -DSPEC_CPU_P64
470.lbm: -DSPEC_CPU_P64
481.wrf: -DSPEC_CPU_P64 -DSPEC_CPU_WINDOWS_ICL
482.sphinx3: -DSPEC_CPU_P64

```

Base Optimization Flags

C benchmarks:

```

/arch:AVX -Qipo -O3 -Qprec-div- -Qparallel -Qansi-alias
-Qopt-prefetch -Qauto-ilp32 /F1000000000

```

C++ benchmarks:

```

/arch:AVX -Qipo -O3 -Qprec-div- -Qparallel -Qansi-alias
-Qopt-prefetch -Qcxx-features -Qauto-ilp32 /F1000000000 shlw64M.lib
-link /FORCE:MULTIPLE

```

Fortran benchmarks:

```

/arch:AVX -Qipo -O3 -Qprec-div- -Qparallel -Qansi-alias
-Qopt-prefetch /F1000000000

```

Benchmarks using both Fortran and C:

```

/arch:AVX -Qipo -O3 -Qprec-div- -Qparallel -Qansi-alias
-Qopt-prefetch -Qauto-ilp32 /F1000000000

```

Peak Compiler Invocation

C benchmarks:

```

icl -Qvc10 -Qstd=c99

```

C++ benchmarks:

```

icl -Qvc10

```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

(Test Sponsor: Intel Corporation)

ASUS F2A85-M PRO Motherboard (AMD A4-4000 APU with Radeon HD Graphics)

SPECfp2006 = 23.6

SPECfp_base2006 = 22.9

CPU2006 license: 13

Test sponsor: Intel Corporation

Tested by: Intel Corporation

Test date: Jul-2014

Hardware Availability: Aug-2013

Software Availability: Oct-2013

Peak Compiler Invocation (Continued)

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

icl -Qvc10 -Qstd=c99 ifort

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

444.namd: /arch:AVX(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
-Qipo -O3 -Qprec-div- -Oa -Qauto-ilp32 /F1000000000
sh1W64M.lib -link /FORCE:MULTIPLE

447.dealIII: basepeak = yes

450.soplex: basepeak = yes

453.povray: /arch:AVX(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
-Qipo -O3 -Qprec-div- -Qunroll4 -Qansi-alias -Qauto-ilp32
/F1000000000 sh1W64M.lib -link /FORCE:MULTIPLE

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: /arch:AVX(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
-Qipo -O3 -Qprec-div- -Qunroll2 -Ob0 -Qansi-alias
-Qscalar-rep- /F1000000000

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

(Test Sponsor: Intel Corporation)

ASUS F2A85-M PRO Motherboard (AMD A4-4000 APU with Radeon HD Graphics)

SPECfp2006 = 23.6

SPECfp_base2006 = 22.9

CPU2006 license: 13

Test sponsor: Intel Corporation

Tested by: Intel Corporation

Test date: Jul-2014

Hardware Availability: Aug-2013

Software Availability: Oct-2013

Peak Optimization Flags (Continued)

459.GemsFDTD: basepeak = yes

```
465.tonto: /arch:AVX(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
           -Qipo -O3 -Qprec-div- -Qunroll4 -Qauto -Qinline-calloc
           /F1000000000
```

Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: basepeak = yes

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-windows.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-windows.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Wed Jul 30 10:54:57 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 29 July 2014.