



SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

(Test Sponsor: Intel Corporation)

ASUS F2A85-M PRO Motherboard (AMD A8-6500 APU with Radeon HD Graphics)

SPECfp®_rate2006 = 42.7

SPECfp_rate_base2006 = 42.2

CPU2006 license: 13


Test sponsor: Intel Corporation

Tested by: Intel Corporation

Test date: Jul-2014

Hardware Availability: Aug-2013

Software Availability: Oct-2013

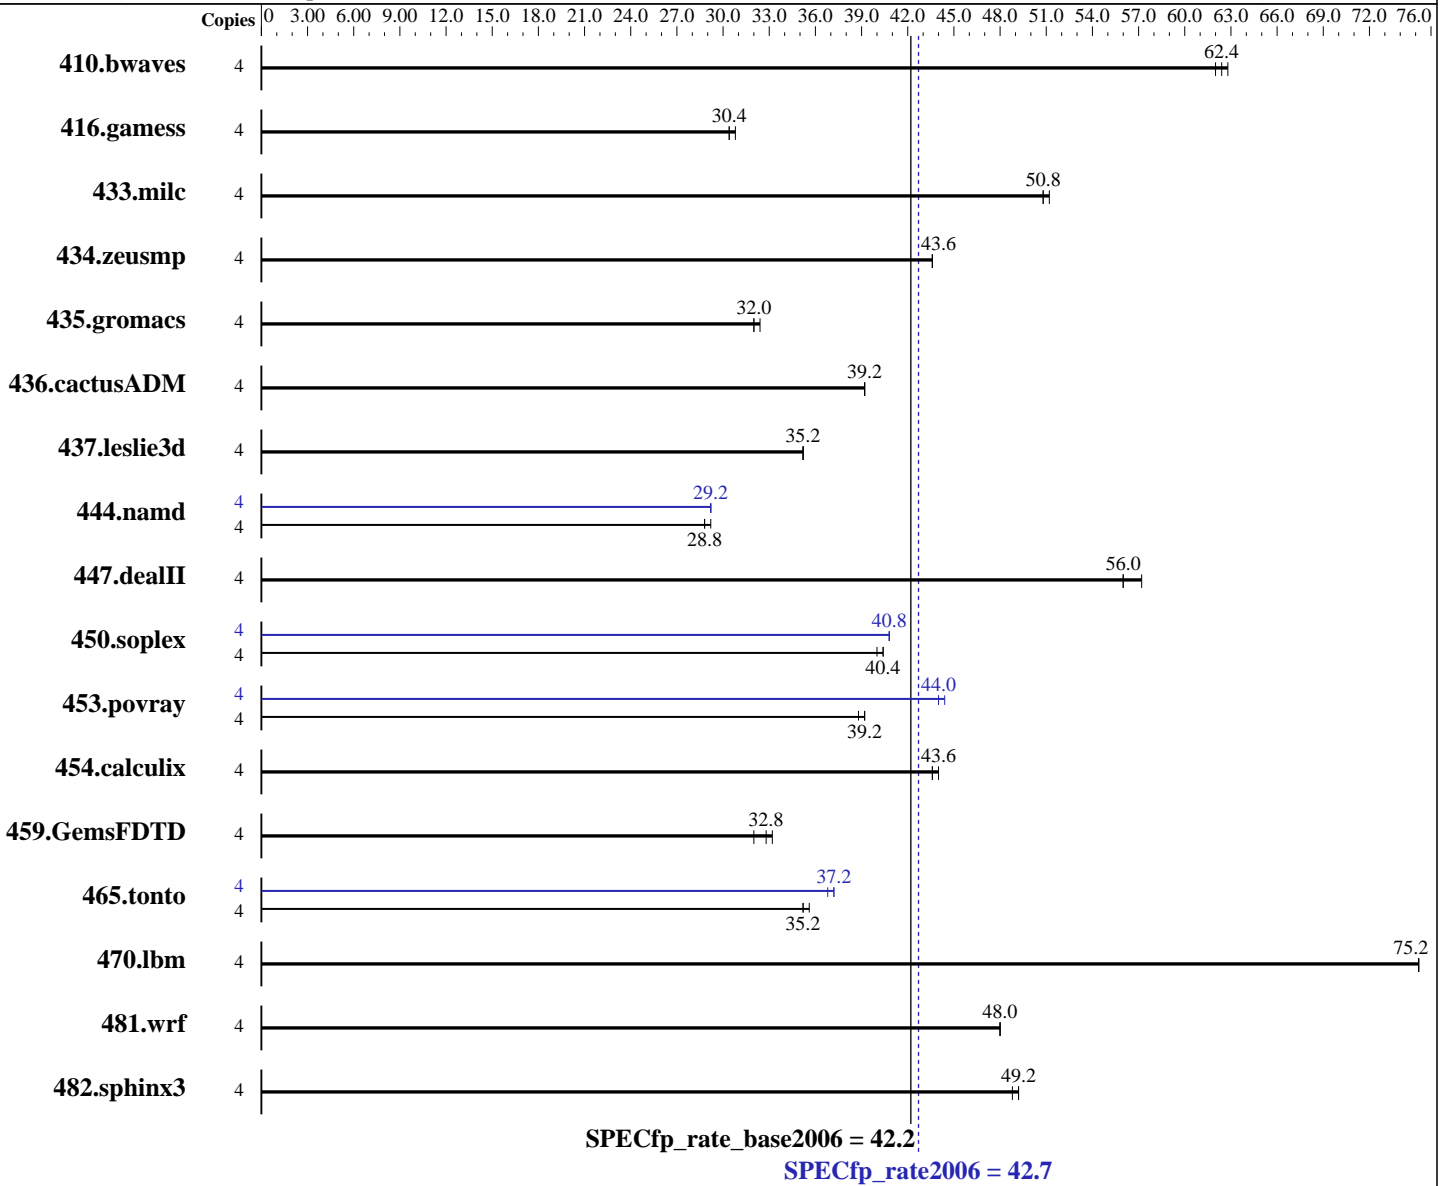

Hardware

CPU Name: AMD A8-6500
 CPU Characteristics: AMD Turbo CORE technology up to 4.10 GHz
 CPU MHz: 3500
 FPU: Integrated
 CPU(s) enabled: 4 cores, 1 chip, 4 cores/chip
 CPU(s) orderable: 1 chip
 Primary Cache: 128 KB I on chip per chip, 64 KB I shared / 2 cores; 16 KB D on chip per core
 Secondary Cache: 4 MB I+D on chip per chip, 2 MB shared / 2 cores

Continued on next page

Software

Operating System: Microsoft Windows 8.1 Pro
 6.3.9600 N/A Build 9600
 Compiler: C/C++: Version 14.0.1.139 of Intel C++ Studio XE for Windows;
 Fortran: Version 14.0.1.139 of Intel Fortran Studio XE for Windows;
 Libraries: Version 16.00.30319.01 of Microsoft Visual Studio 2010 Professional SP1
 Auto Parallel: No

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

(Test Sponsor: Intel Corporation)

ASUS F2A85-M PRO Motherboard (AMD A8-6500 APU with Radeon HD Graphics)

SPECfp_rate2006 = 42.7

SPECfp_rate_base2006 = 42.2

CPU2006 license: 13

Test sponsor: Intel Corporation

Tested by: Intel Corporation

Test date: Jul-2014

Hardware Availability: Aug-2013

Software Availability: Oct-2013

L3 Cache: None
Other Cache: None
Memory: 8 GB (2 x 4 GB 2Rx4 PC3-12800U-11)
Disk Subsystem: 1 TB SATA HDD, 7200 RPM
Other Hardware: None

File System: NTFS
System State: Default
Base Pointers: 32/64-bit
Peak Pointers: 32/64-bit
Other Software: SmartHeap Library Version 10.0 from <http://www.microquill.com/>

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	4	875	62.0	870	62.4	867	62.8	4	875	62.0	870	62.4	867	62.8
416.gamess	4	2573	30.4	2550	30.8	2570	30.4	4	2573	30.4	2550	30.8	2570	30.4
433.milc	4	725	50.8	722	50.8	720	51.2	4	725	50.8	722	50.8	720	51.2
434.zeusmp	4	835	43.6	835	43.6	834	43.6	4	835	43.6	835	43.6	834	43.6
435.gromacs	4	888	32.0	894	32.0	886	32.4	4	888	32.0	894	32.0	886	32.4
436.cactusADM	4	1216	39.2	1215	39.2	1216	39.2	4	1216	39.2	1215	39.2	1216	39.2
437.leslie3d	4	1064	35.2	1067	35.2	1069	35.2	4	1064	35.2	1067	35.2	1069	35.2
444.namd	4	1109	28.8	1107	28.8	1104	29.2	4	1098	29.2	1094	29.2	1099	29.2
447.dealII	4	815	56.0	801	57.2	820	56.0	4	815	56.0	801	57.2	820	56.0
450.soplex	4	837	40.0	828	40.4	828	40.4	4	818	40.8	818	40.8	818	40.8
453.povray	4	543	39.2	542	39.2	546	38.8	4	481	44.4	482	44.0	485	44.0
454.calculix	4	752	44.0	756	43.6	755	43.6	4	752	44.0	756	43.6	755	43.6
459.GemsFDTD	4	1300	32.8	1284	33.2	1321	32.0	4	1300	32.8	1284	33.2	1321	32.0
465.tonto	4	1123	35.2	1120	35.2	1109	35.6	4	1055	37.2	1067	36.8	1063	37.2
470.lbm	4	732	75.2	730	75.2	730	75.2	4	732	75.2	730	75.2	730	75.2
481.wrf	4	930	48.0	929	48.0	928	48.0	4	930	48.0	929	48.0	928	48.0
482.sphinx3	4	1588	49.2	1601	48.8	1586	49.2	4	1588	49.2	1601	48.8	1586	49.2

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Invocation Notes

To compile these binaries, the Intel Compiler 14.0 was set up to generate 64-bit binaries with the command:
"ipsxe-comp-vars.bat intel64 vs2010" (shortcut provided in the Intel(r) Parallel Studio XE 2013 program folder)

Submit Notes

Processes were bound to specific processors using the start command with the /affinity switch. The config file option 'submit' was used to generate the affinity mask for each process.



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

(Test Sponsor: Intel Corporation)

ASUS F2A85-M PRO Motherboard (AMD A8-6500 APU with Radeon HD Graphics)

SPECfp_rate2006 = 42.7

SPECfp_rate_base2006 = 42.2

CPU2006 license: 13

Test sponsor: Intel Corporation

Tested by: Intel Corporation

Test date: Jul-2014

Hardware Availability: Aug-2013

Software Availability: Oct-2013

Platform Notes

Sysinfo program C:\SPEC14.0\Docs\sysinfo
\$Rev: 6775 \$ \$Date:: 2011-08-16 #\$ \8787f7622badcf24e01c368b1db4377c
running on Clt50465DB57F98 Wed Jul 2 03:56:27 2014

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

Trying 'systeminfo'

OS Name : Microsoft Windows 8.1 Pro
OS Version : 6.3.9600 N/A Build 9600
System Manufacturer: System manufacturer
System Model : System Product Name
Processor(s) : 1 Processor(s) Installed.
 [01]: AMD64 Family 21 Model 19 Stepping 1 AuthenticAMD ~3500 Mhz
BIOS Version : American Megatrends Inc. 6303, 8/13/2013
Total Physical Memory: 7,366 MB

Trying 'wmic cpu get /value'

DeviceID : CPU0
L2CacheSize : 4096
L3CacheSize : 0
MaxClockSpeed : 3500
Name : AMD A8-6500 APU with Radeon(tm) HD Graphics
NumberOfCores : 2
NumberOfLogicalProcessors: 4

(End of data from sysinfo program)

Component Notes

Tested systems can be used with Shin-G ATX case,
PC Power and Cooling 1200W power supply

General Notes

Binaries compiled on a system with 1x Intel Core i7-860 CPU
+ 8GB memory using Windows 7 Enterprise 64-bit

Base Compiler Invocation

C benchmarks:

icl -Qvc10 -Qstd=c99

C++ benchmarks:

icl -Qvc10

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

(Test Sponsor: Intel Corporation)

ASUS F2A85-M PRO Motherboard (AMD A8-6500 APU with Radeon HD Graphics)

SPECfp_rate2006 = 42.7

SPECfp_rate_base2006 = 42.2

CPU2006 license: 13

Test sponsor: Intel Corporation

Tested by: Intel Corporation

Test date: Jul-2014

Hardware Availability: Aug-2013

Software Availability: Oct-2013

Base Compiler Invocation (Continued)

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

icl -Qvc10 -Qstd=c99 ifort

Base Portability Flags

410.bwaves: -DSPEC_CPU_P64
 416.gamess: -DSPEC_CPU_P64
 433.milc: -DSPEC_CPU_P64
 434.zeusmp: -DSPEC_CPU_P64
 435.gromacs: -DSPEC_CPU_P64
 436.cactusADM: -DSPEC_CPU_P64 /names:lowercase /assume:underscore
 437.leslie3d: -DSPEC_CPU_P64
 444.namd: -DSPEC_CPU_P64 /TP
 447.dealII: -DSPEC_CPU_P64 -DDEAL_II_MEMBER_VAR_SPECIALIZATION_BUG
 -Qoption,cpp,--ms_incompat_treatment_of_commas_in_macros
 450.soplex: -DSPEC_CPU_P64
 453.povray: -DSPEC_CPU_P64 -DSPEC_CPU_NEED_INVHYP -DNEED_INVHYP
 454.calculix: -DSPEC_CPU_P64 -DSPEC_CPU_NOZMODIFIER /names:lowercase
 459.GemsFDTD: -DSPEC_CPU_P64
 465.tonto: -DSPEC_CPU_P64
 470.lbm: -DSPEC_CPU_P64
 481.wrf: -DSPEC_CPU_P64 -DSPEC_CPU_WINDOWS_ICL
 482.sphinx3: -DSPEC_CPU_P64

Base Optimization Flags

C benchmarks:

/arch:AVX -Qipo -O3 -Qprec-div- -Qansi-alias -Qopt-prefetch
-Qauto-ilp32 /F1000000000 -link /FORCE:MULTIPLE

C++ benchmarks:

/arch:AVX -Qipo -O3 -Qprec-div- -Qansi-alias -Qopt-prefetch
-Qcxx-features -Qauto-ilp32 /F1000000000 shlw64M.lib
-link /FORCE:MULTIPLE

Fortran benchmarks:

/arch:AVX -Qipo -O3 -Qprec-div- -Qansi-alias -Qopt-prefetch
/F1000000000 -link /FORCE:MULTIPLE

Benchmarks using both Fortran and C:

/arch:AVX -Qipo -O3 -Qprec-div- -Qansi-alias -Qopt-prefetch
-Qauto-ilp32 /F1000000000 -link /FORCE:MULTIPLE



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

(Test Sponsor: Intel Corporation)

ASUS F2A85-M PRO Motherboard (AMD A8-6500 APU with Radeon HD Graphics)

SPECfp_rate2006 = 42.7

SPECfp_rate_base2006 = 42.2

CPU2006 license: 13

Test sponsor: Intel Corporation

Tested by: Intel Corporation

Test date: Jul-2014

Hardware Availability: Aug-2013

Software Availability: Oct-2013

Peak Compiler Invocation

C benchmarks:

icl -Qvc10 -Qstd=c99

C++ benchmarks:

icl -Qvc10

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

icl -Qvc10 -Qstd=c99 ifort

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

444.namd: /arch:AVX(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
-Qipo -O3 -Qprec-div- -Oa -Qauto-ilp32 /F1000000000
shlW64M.lib -link /FORCE:MULTIPLE

447.dealIII: basepeak = yes

450.soplex: /arch:AVX(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
-Qipo -O3 -Qauto-ilp32 /F1000000000 shlW64M.lib
-link /FORCE:MULTIPLE

453.povray: /arch:AVX(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
-Qipo -O3 -Qprec-div- -Qopt-prefetch -Qauto-ilp32
/F1000000000 shlW64M.lib -link /FORCE:MULTIPLE

Fortran benchmarks:

410.bwaves: basepeak = yes

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

(Test Sponsor: Intel Corporation)

ASUS F2A85-M PRO Motherboard (AMD A8-6500 APU with Radeon HD Graphics)

SPECfp_rate2006 = 42.7

SPECfp_rate_base2006 = 42.2

CPU2006 license: 13

Test sponsor: Intel Corporation

Tested by: Intel Corporation

Test date: Jul-2014

Hardware Availability: Aug-2013

Software Availability: Oct-2013

Peak Optimization Flags (Continued)

416.gamess: basepeak = yes

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: basepeak = yes

```
465.tonto: /arch:AVX(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
           -Qipo -O3 -Qprec-div- -Qunroll4 -Qauto /F10000000000
           -link /FORCE:MULTIPLE
```

Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: basepeak = yes

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-windows.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-windows.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Tue Aug 12 15:02:01 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 12 August 2014.