



# SPEC<sup>®</sup> CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## IBM Corporation


IBM System x3850 X6  
(Intel Xeon E7-4880 v2, 2.50 GHz)

SPECint<sup>®</sup>\_rate2006 = 2120

SPECint\_rate\_base2006 = 2060

CPU2006 license: 11  
Test sponsor: IBM Corporation  
Tested by: IBM Corporation

Test date: Jul-2014  
Hardware Availability: Mar-2014  
Software Availability: Nov-2013

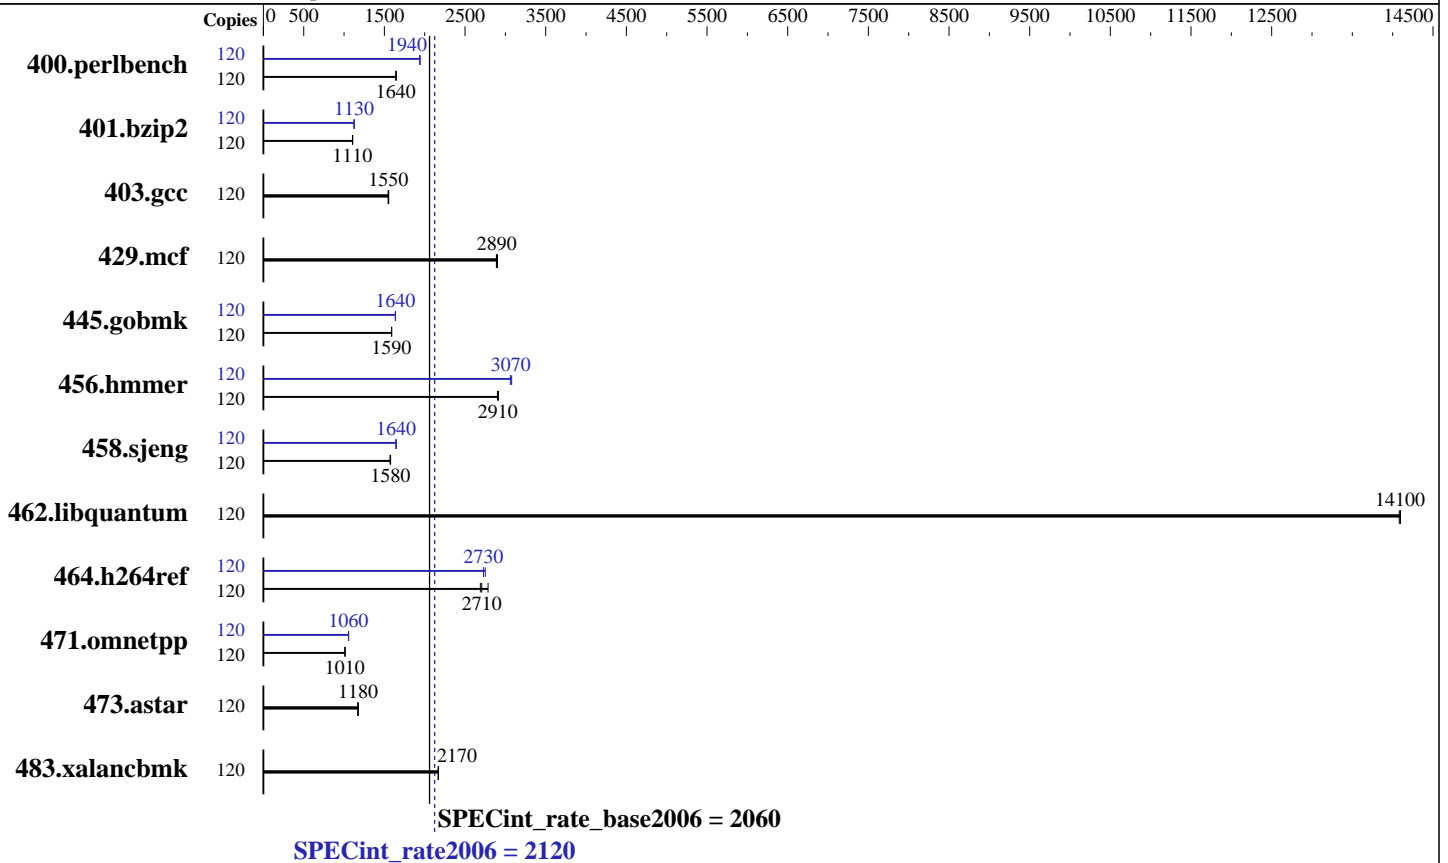

### Hardware

CPU Name: Intel Xeon E7-4880 v2  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.10 GHz  
 CPU MHz: 2500  
 FPU: Integrated  
 CPU(s) enabled: 60 cores, 4 chips, 15 cores/chip, 2 threads/core  
 CPU(s) orderable: 2,4 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core  
 L3 Cache: 37.5 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 1 TB (64 x 16 GB 2Rx4 PC3L-12800R-11, ECC, running at 1333 MHz)  
 Disk Subsystem: 1 x 400 GB SATA, SSD  
 Other Hardware: None

### Software

Operating System: Red Hat Enterprise Linux Server release 6.5 (Santiago)  
 2.6.32-431.el6.x86\_64  
 Compiler: C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux  
 Auto Parallel: No  
 File System: ext4  
 System State: Run level 3 (multi-user)  
 Base Pointers: 32-bit  
 Peak Pointers: 32/64-bit  
 Other Software: Microquill SmartHeap V10.0



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## IBM Corporation

IBM System x3850 X6  
(Intel Xeon E7-4880 v2, 2.50 GHz)

SPECint\_rate2006 = 2120

SPECint\_rate\_base2006 = 2060

CPU2006 license: 11  
Test sponsor: IBM Corporation  
Tested by: IBM Corporation

Test date: Jul-2014  
Hardware Availability: Mar-2014  
Software Availability: Nov-2013

## Results Table

Benchmark	Base						Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	120	711	1650	714	1640	<u>713</u>	<u>1640</u>	120	605	1940	603	1940	<u>605</u>	<u>1940</u>
401.bzip2	120	1049	1100	<u>1047</u>	<u>1110</u>	1046	1110	120	<u>1029</u>	<u>1130</u>	1029	1130	1030	1120
403.gcc	120	622	1550	625	1550	<u>622</u>	<u>1550</u>	120	622	1550	625	1550	<u>622</u>	<u>1550</u>
429.mcf	120	379	2890	377	2900	<u>378</u>	<u>2890</u>	120	379	2890	377	2900	<u>378</u>	<u>2890</u>
445.gobmk	120	792	1590	<u>792</u>	<u>1590</u>	791	1590	120	<u>769</u>	<u>1640</u>	768	1640	770	1640
456.hammer	120	<u>385</u>	<u>2910</u>	384	2910	386	2900	120	366	3060	<u>365</u>	<u>3070</u>	364	3080
458.sjeng	120	925	1570	920	1580	<u>922</u>	<u>1580</u>	120	<u>883</u>	<u>1640</u>	881	1650	884	1640
462.libquantum	120	<u>176</u>	<u>14100</u>	177	14100	176	14100	120	<u>176</u>	<u>14100</u>	177	14100	176	14100
464.h264ref	120	987	2690	<u>981</u>	<u>2710</u>	953	2790	120	965	2750	973	2730	<u>973</u>	<u>2730</u>
471.omnetpp	120	742	1010	741	1010	<u>741</u>	<u>1010</u>	120	709	1060	711	1050	<u>710</u>	<u>1060</u>
473.astar	120	719	1170	716	1180	<u>717</u>	<u>1180</u>	120	719	1170	716	1180	<u>717</u>	<u>1180</u>
483.xalancbmk	120	<u>382</u>	<u>2170</u>	381	2170	382	2170	120	<u>382</u>	<u>2170</u>	381	2170	382	2170

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

Operating Mode set to Maximum Performance in BIOS  
Memory Data Scrambling Disabled  
Patrol Scrub Disabled  
Sysinfo program /cpu2006.1.2\_14.0\_aug2013/config/sysinfo.rev6818  
\$Rev: 6818 \$ \$Date:: 2012-07-17 #\$ e86d102572650a6e4d596a3cee98f191  
running on Larry-Andromeda Wed Jul 16 11:11:28 2014

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:  
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo  
model name : Intel(R) Xeon(R) CPU E7-4880 v2 @ 2.50GHz  
4 "physical id"s (chips)  
120 "processors"  
cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with  
Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## IBM Corporation

IBM System x3850 X6  
(Intel Xeon E7-4880 v2, 2.50 GHz)

SPECint\_rate2006 = 2120

SPECint\_rate\_base2006 = 2060

CPU2006 license: 11  
Test sponsor: IBM Corporation  
Tested by: IBM Corporation

Test date: Jul-2014  
Hardware Availability: Mar-2014  
Software Availability: Nov-2013

### Platform Notes (Continued)

```
caution.)
cpu cores : 15
siblings  : 30
physical 0: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14
physical 1: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14
physical 2: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14
physical 3: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14
cache size : 38400 KB
```

```
From /proc/meminfo
MemTotal:      1058467616 kB
HugePages_Total:      0
Hugepagesize:    2048 kB
```

```
/usr/bin/lsb_release -d
Red Hat Enterprise Linux Server release 6.5 (Santiago)
```

```
From /etc/*release* /etc/*version*
redhat-release: Red Hat Enterprise Linux Server release 6.5 (Santiago)
system-release: Red Hat Enterprise Linux Server release 6.5 (Santiago)
system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server
```

```
uname -a:
Linux Larry-Andromeda 2.6.32-431.el6.x86_64 #1 SMP Sun Nov 10 22:19:54 EST
2013 x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 Jul 16 11:10
```

```
SPEC is set to: /cpu2006.1.2_14.0_aug2013
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/mapper/vg_larryandromed-lv_root ext4  357G  233G  106G  69% /
```

```
Additional information from dmidecode:
BIOS IBM  -[A8E107JUS-1.00]- 05/02/2014
Memory:
32x NO DIMM Unknown
64x Samsung M393B2G70QH0-YK0 16 GB 1333 MHz 2 rank
```

(End of data from sysinfo program)

### General Notes

Environment variables set by runspec before the start of the run:  
LD\_LIBRARY\_PATH = "/cpu2006.1.2\_14.0\_aug2013/libs/32:/cpu2006.1.2\_14.0\_aug2013/libs/64:/cpu2006.1.2\_14.0\_aug2013/sh"

```
Binaries compiled on a system with 1x Core i7-860 CPU + 8GB
memory using RedHat EL 6.4
Transparent Huge Pages enabled with:
echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled
Filesystem page cache cleared with:
echo 1> /proc/sys/vm/drop_caches
```

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**IBM Corporation**

IBM System x3850 X6  
(Intel Xeon E7-4880 v2, 2.50 GHz)

**SPECint\_rate2006 = 2120**

**SPECint\_rate\_base2006 = 2060**

**CPU2006 license:** 11  
**Test sponsor:** IBM Corporation  
**Tested by:** IBM Corporation

**Test date:** Jul-2014  
**Hardware Availability:** Mar-2014  
**Software Availability:** Nov-2013

## General Notes (Continued)

runspec command invoked through numactl i.e.:  
numactl --interleave=all runspec <etc>

## Base Compiler Invocation

C benchmarks:  
icc -m32  
  
C++ benchmarks:  
icpc -m32

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_LINUX\_IA32  
462.libquantum: -DSPEC\_CPU\_LINUX  
483.xalancbmk: -DSPEC\_CPU\_LINUX

## Base Optimization Flags

C benchmarks:  
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3  
  
C++ benchmarks:  
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3  
-Wl,-z,muldefs -L/sh -lsmartheap

## Base Other Flags

C benchmarks:  
403.gcc: -Dalloca=\_alloca

## Peak Compiler Invocation

C benchmarks (except as noted below):  
icc -m32  
  
400.perlbench: icc -m64  
  
401.bzip2: icc -m64

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**IBM Corporation**

IBM System x3850 X6  
(Intel Xeon E7-4880 v2, 2.50 GHz)

**SPECint\_rate2006 = 2120**

**SPECint\_rate\_base2006 = 2060**

**CPU2006 license:** 11  
**Test sponsor:** IBM Corporation  
**Tested by:** IBM Corporation

**Test date:** Jul-2014  
**Hardware Availability:** Mar-2014  
**Software Availability:** Nov-2013

## Peak Compiler Invocation (Continued)

456.hmmer: `icc -m64`

458.sjeng: `icc -m64`

C++ benchmarks:  
`icpc -m32`

## Peak Portability Flags

400.perlbench: `-DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64`  
401.bzip2: `-DSPEC_CPU_LP64`  
456.hmmer: `-DSPEC_CPU_LP64`  
458.sjeng: `-DSPEC_CPU_LP64`  
462.libquantum: `-DSPEC_CPU_LINUX`  
483.xalancbmk: `-DSPEC_CPU_LINUX`

## Peak Optimization Flags

C benchmarks:

400.perlbench: `-xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)`  
`-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)`  
`-auto-ilp32`

401.bzip2: `-xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)`  
`-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)`  
`-opt-prefetch -auto-ilp32 -ansi-alias`

403.gcc: `basepeak = yes`

429.mcf: `basepeak = yes`

445.gobmk: `-xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)`  
`-ansi-alias -opt-mem-layout-trans=3`

456.hmmer: `-xSSE4.2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32`

458.sjeng: `-xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)`  
`-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)`  
`-unroll4 -auto-ilp32`

462.libquantum: `basepeak = yes`

464.h264ref: `-xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)`  
`-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)`  
`-unroll2 -ansi-alias`

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**IBM Corporation**

IBM System x3850 X6  
(Intel Xeon E7-4880 v2, 2.50 GHz)

**SPECint\_rate2006 = 2120**

**SPECint\_rate\_base2006 = 2060**

**CPU2006 license:** 11  
**Test sponsor:** IBM Corporation  
**Tested by:** IBM Corporation

**Test date:** Jul-2014  
**Hardware Availability:** Mar-2014  
**Software Availability:** Nov-2013

## Peak Optimization Flags (Continued)

C++ benchmarks:

471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs  
-L/sh -lsmartheap

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes

## Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.html>  
<http://www.spec.org/cpu2006/flags/IBM-Platform-Flags-V1.2-IVB-A.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.xml>  
<http://www.spec.org/cpu2006/flags/IBM-Platform-Flags-V1.2-IVB-A.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Tue Aug 12 13:17:07 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 12 August 2014.