



SPEC[®] CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

SPECfp[®]_rate2006 = 127

Express5800/T110g-S (Intel Xeon E3-1240L v3)

SPECfp_rate_base2006 = 124

CPU2006 license: 9006


Test date: Jul-2014

Test sponsor: NEC Corporation

Hardware Availability: Jul-2014

Tested by: NEC Corporation

Software Availability: Jan-2014

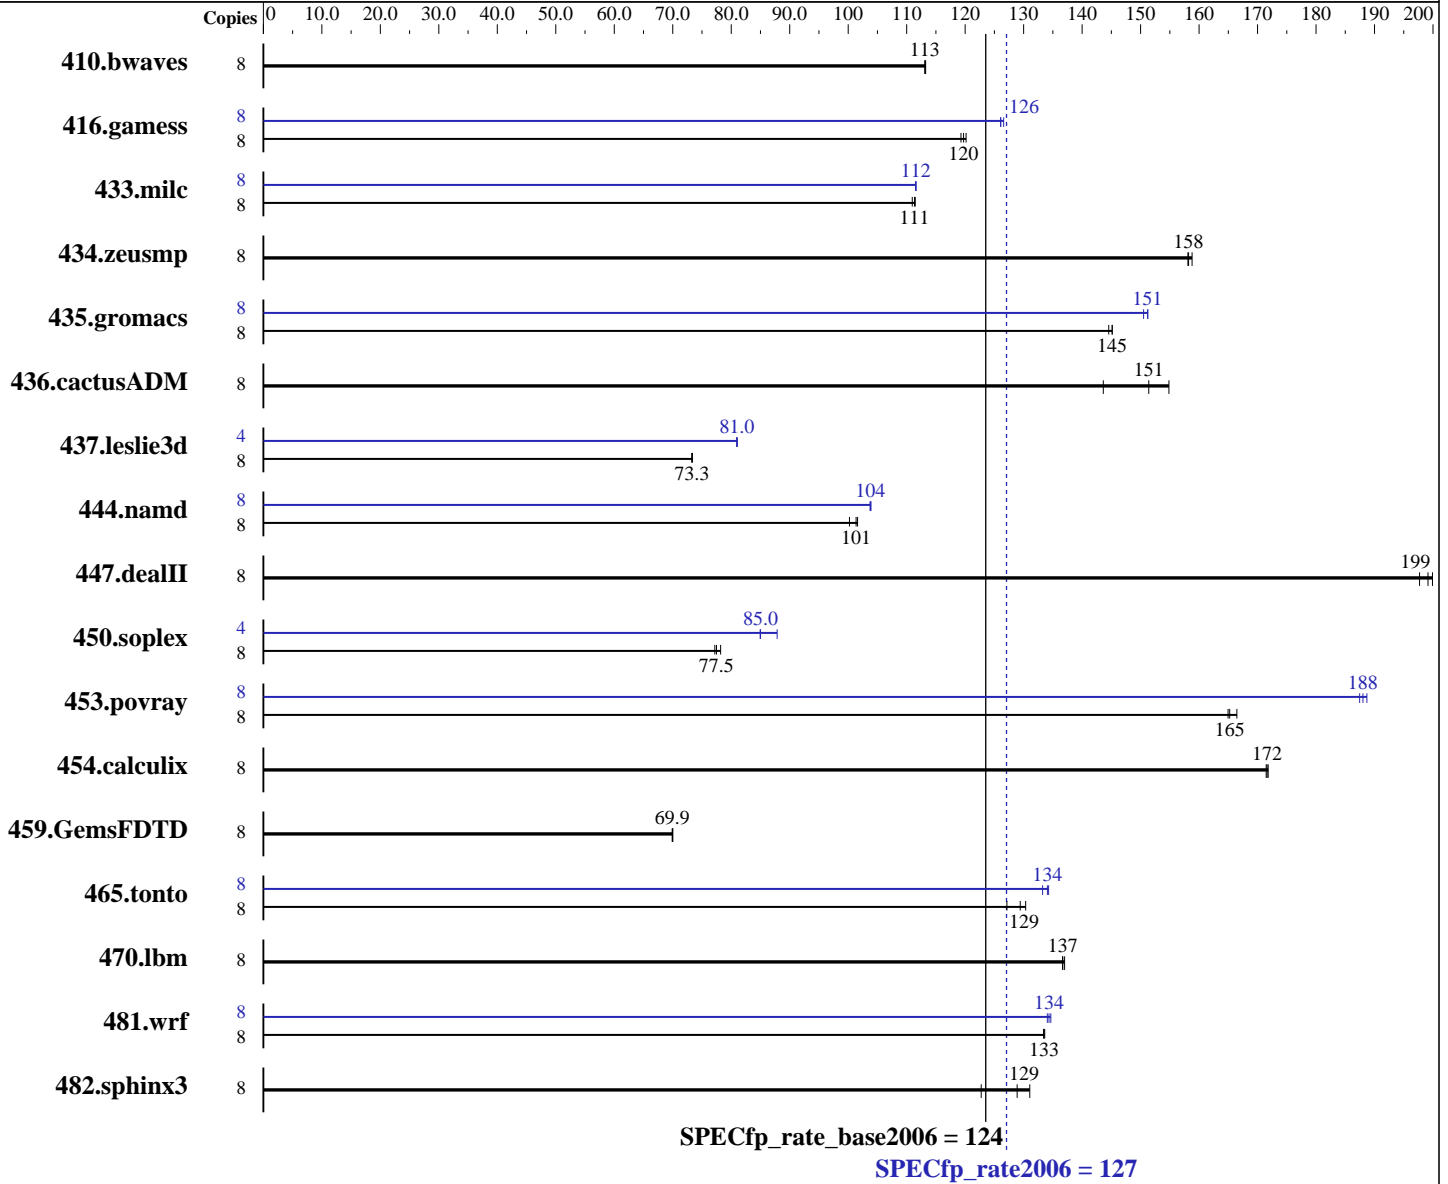

Hardware

CPU Name: Intel Xeon E3-1240L v3
 CPU Characteristics: Intel Turbo Boost Technology up to 3.00 GHz
 CPU MHz: 2000
 FPU: Integrated
 CPU(s) enabled: 4 cores, 1 chip, 4 cores/chip, 2 threads/core
 CPU(s) orderable: 1 chip
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

Software

Operating System: Red Hat Enterprise Linux Server release 6.5 (Santiago)
 Kernel 2.6.32-431.el6.x86_64
 Compiler: C/C++: Version 14.0.2.144 of Intel C++ Studio XE for Linux;
 Fortran: Version 14.0.2.144 of Intel Fortran Studio XE for Linux
 Auto Parallel: No
 File System: ext4

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

SPECfp_rate2006 = 127

Express5800/T110g-S (Intel Xeon E3-1240L v3)

SPECfp_rate_base2006 = 124

CPU2006 license: 9006

Test date: Jul-2014

Test sponsor: NEC Corporation

Hardware Availability: Jul-2014

Tested by: NEC Corporation

Software Availability: Jan-2014

L3 Cache: 8 MB I+D on chip per chip
 Other Cache: None
 Memory: 16 GB (2 x 8 GB 2Rx8 PC3-12800E-11, ECC)
 Disk Subsystem: 1 x 250 GB SATA, 7200 RPM
 Other Hardware: None

System State: Run level 3 (multi-user)
 Base Pointers: 32/64-bit
 Peak Pointers: 32/64-bit
 Other Software: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	8	961	113	<u>961</u>	<u>113</u>	960	113	8	961	113	<u>961</u>	<u>113</u>	960	113
416.gamess	8	1313	119	<u>1308</u>	<u>120</u>	1304	120	8	<u>1242</u>	<u>126</u>	1237	127	1242	126
433.milc	8	<u>660</u>	<u>111</u>	659	111	662	111	8	658	112	<u>658</u>	<u>112</u>	659	112
434.zeusmp	8	460	158	<u>460</u>	<u>158</u>	458	159	8	460	158	<u>460</u>	<u>158</u>	458	159
435.gromacs	8	395	145	394	145	<u>394</u>	<u>145</u>	8	<u>378</u>	<u>151</u>	378	151	379	151
436.cactusADM	8	<u>631</u>	<u>151</u>	617	155	666	144	8	<u>631</u>	<u>151</u>	617	155	666	144
437.leslie3d	8	<u>1026</u>	<u>73.3</u>	1025	73.4	1026	73.3	4	465	80.9	<u>464</u>	<u>81.0</u>	464	81.0
444.namd	8	640	100	<u>633</u>	<u>101</u>	631	102	8	618	104	<u>618</u>	<u>104</u>	618	104
447.dealII	8	463	198	458	200	<u>460</u>	<u>199</u>	8	463	198	458	200	<u>460</u>	<u>199</u>
450.soplex	8	853	78.2	<u>861</u>	<u>77.5</u>	864	77.2	4	380	87.9	<u>392</u>	<u>85.0</u>	393	84.9
453.povray	8	258	165	<u>258</u>	<u>165</u>	256	166	8	<u>226</u>	<u>188</u>	227	187	226	189
454.calculix	8	384	172	385	171	<u>385</u>	<u>172</u>	8	384	172	385	171	<u>385</u>	<u>172</u>
459.GemsFDTD	8	<u>1214</u>	<u>69.9</u>	1212	70.0	1214	69.9	8	<u>1214</u>	<u>69.9</u>	1212	70.0	1214	69.9
465.tonto	8	619	127	<u>608</u>	<u>129</u>	604	130	8	591	133	<u>587</u>	<u>134</u>	586	134
470.lbm	8	804	137	<u>804</u>	<u>137</u>	802	137	8	804	137	<u>804</u>	<u>137</u>	802	137
481.wrf	8	<u>669</u>	<u>133</u>	670	133	669	134	8	667	134	<u>665</u>	<u>134</u>	664	135
482.sphinx3	8	1270	123	<u>1210</u>	<u>129</u>	1190	131	8	1270	123	<u>1210</u>	<u>129</u>	1190	131

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

BIOS Settings:
Energy Performance: Performance



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

SPECfp_rate2006 = 127

Express5800/T110g-S (Intel Xeon E3-1240L v3)

SPECfp_rate_base2006 = 124

CPU2006 license: 9006

Test date: Jul-2014

Test sponsor: NEC Corporation

Hardware Availability: Jul-2014

Tested by: NEC Corporation

Software Availability: Jan-2014

General Notes

Environment variables set by runspec before the start of the run:

LD_LIBRARY_PATH = "/home/cpu2006/libs/32:/home/cpu2006/libs/64:/home/cpu2006/sh"

Transparent Huge Pages enabled with:

```
echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled
```

Filesystem page cache cleared with:

```
echo 1 > /proc/sys/vm/drop_caches
```

runspec command invoked through numactl i.e.:

```
numactl --interleave=all runspec <etc>
```

Base Compiler Invocation

C benchmarks:

```
icc -m64
```

C++ benchmarks:

```
icpc -m64
```

Fortran benchmarks:

```
ifort -m64
```

Benchmarks using both Fortran and C:

```
icc -m64 ifort -m64
```

Base Portability Flags

```

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

```



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

SPECfp_rate2006 = 127

Express5800/T110g-S (Intel Xeon E3-1240L v3)

SPECfp_rate_base2006 = 124

CPU2006 license: 9006

Test date: Jul-2014

Test sponsor: NEC Corporation

Hardware Availability: Jul-2014

Tested by: NEC Corporation

Software Availability: Jan-2014

Base Optimization Flags

C benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

C++ benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

Fortran benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch

Benchmarks using both Fortran and C:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

Peak Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks (except as noted below):

icpc -m64

450.soplex: icpc -m32

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

SPECfp_rate2006 = 127

Express5800/T110g-S (Intel Xeon E3-1240L v3)

SPECfp_rate_base2006 = 124

CPU2006 license: 9006

Test date: Jul-2014

Test sponsor: NEC Corporation

Hardware Availability: Jul-2014

Tested by: NEC Corporation

Software Availability: Jan-2014

Peak Portability Flags (Continued)

465.tonto: -DSPEC_CPU_LP64
 470.lbm: -DSPEC_CPU_LP64
 481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
 482.sphinx3: -DSPEC_CPU_LP64

Peak Optimization Flags

C benchmarks:

433.milc: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
 -O3(pass 2) -no-prec-div(pass 2)
 -opt-mem-layout-trans=3(pass 2) -prof-use(pass 2)
 -auto-ilp32

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

444.namd: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
 -O3(pass 2) -no-prec-div(pass 2)
 -opt-mem-layout-trans=3(pass 2) -prof-use(pass 2) -fno-alias
 -auto-ilp32

447.dealIII: basepeak = yes

450.soplex: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
 -O3(pass 2) -no-prec-div(pass 2)
 -opt-mem-layout-trans=3(pass 2) -prof-use(pass 2)
 -opt-malloc-options=3

453.povray: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
 -O3(pass 2) -no-prec-div(pass 2)
 -opt-mem-layout-trans=3(pass 2) -prof-use(pass 2) -unroll4
 -ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
 -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll2
 -inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

SPECfp_rate2006 = 127

Express5800/T110g-S (Intel Xeon E3-1240L v3)

SPECfp_rate_base2006 = 124

CPU2006 license: 9006

Test date: Jul-2014

Test sponsor: NEC Corporation

Hardware Availability: Jul-2014

Tested by: NEC Corporation

Software Availability: Jan-2014

Peak Optimization Flags (Continued)

437.leslie3d: -xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch

459.GemsFDTD: basepeak = yes

465.tonto: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll4
-auto -inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2)
-opt-mem-layout-trans=3(pass 2) -prof-use(pass 2)
-opt-prefetch -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: -xCORE-AVX2 -ipo -O3 -no-prec-div -auto-ilp32

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.html>
<http://www.spec.org/cpu2006/flags/NEC-Platform-Settings-V1.2-R120-RevB.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.xml>
<http://www.spec.org/cpu2006/flags/NEC-Platform-Settings-V1.2-R120-RevB.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Tue Aug 26 18:09:49 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 26 August 2014.